


Raven Emergency Downlight



- Recessed Self-test emergency downlight with self-contained inverter and battery pack
- Integral components for fast-fit installation
- Option of escape route or open area models
- High performance optic design
- Pre-wired with 150mm rubber insulated cable for ease of installation
- Up to 15 metres spacing between luminaires

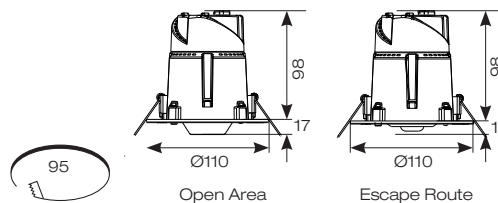

Emergency downlight with integral inverter and battery pack



Escape Route



Open Area

***	Escape route 2 metres wide (1 Lux minimum) *			
	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
Mounting Height (M)				
2.5	-	-	4	10
4	-	-	3	11
6	**	**	**	**

***	Open (Anti-Panic) area (0.5 Lux Minimum) **			
	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
Mounting Height (M)				
2.5	2.5	4.88	2.5	4.88
4	2.8	6.69	2.8	6.69
6	2	8.5	2	8.5

INPUT	HERTZ	TEMP	LIFETIME (HRS)	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	0°C to 40°C	L70 50,000	Open area - 43.3° Escape route - 142°x49°	1	IP65 (Lamp head)	IK08

CODE	DESCRIPTION	WATTAGE	CCT	EMERGENCY MODE	TRADE
ARALED/ER/3NM/ST	Non-Maintained - Escape Route	3W	6500K	111lm	£61.00
ARALED/OA/3NM/ST	Non-Maintained - Open Area	3W	6500K	128lm	£61.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ASBP/14/LI	3.2V 3000mAh Li-FePO4 Replacement Battery	£11.30

