

Product Environmental Profile

SpaceLogic,Thermostat,FCU,Touch,Modbus,4P,240V,XS,Black






General information

Representative product	SpaceLogic,Thermostat,FCU,Touch,Modbus,4P,240V,XS,Black - TC907-3A4DLMSAB
Description of the product	To control FAN coil units to match with the setpoint
Functional unit	Control during 10 years the ambient temperature in a zone according to a temperature set by the user a range of ambient temperature between 0° and 35°C, with a temperature step of 0.5 °C and characterized by a rated current of up to 30 mA and a current of up to 45 mA when the contact is closed (heating/air conditioning is on) and backlit is ON.



Constituent materials

Reference product mass	220.6 g including the product, its packaging and additional elements and accessories
-------------------------------	--

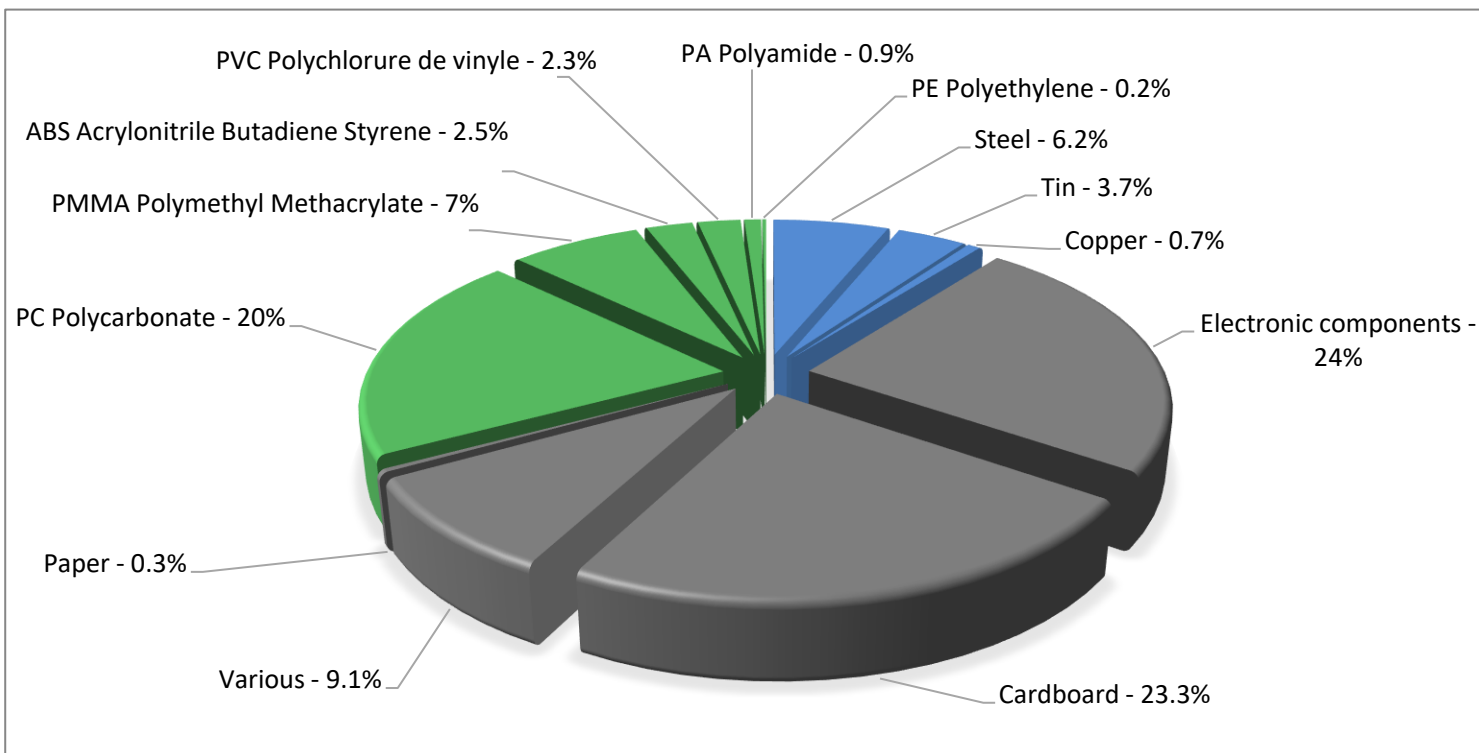

Plastics	32.0%
Metals	10.6%
Others	57.4%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011 and EU 2015/863) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE, Bis(2-ethylhexyl) phthalate -DEHP, Butyl benzyl phthalate -BBP, Dibutyl phthalate – DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

Additional environmental information

The SpaceLogic,Thermostat,FCU,Touch,Modbus,4P,240V,XS,Black presents the following relevant environmental aspects

Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 54.1 g, consisting of Cardboard (95.84%), Plastic (4.08%), Paper (0.08%) Product distribution optimised by setting up local distribution centres
Installation	Ref TC907-3A4DLMSAB does not require any installation operations.
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains Main PCBA(14.7g) Power PCBA(55.6g) Li Button battery(0.8g) LCD(18.7g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 42% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Environmental impacts


Reference life time	10 years
Product category	Thermostats
Installation elements	No special components needed
Use scenario	Refer to PSR0005, Load rate of the product:100% of In during 100% of the RLT, Load rate of the closed contact: 30% of IL during 14% of the RLT. But confirm with designer, The product is in active mode 5% of the time with a power use of 2.0W, in stand-by mode 50% of the time with a power use of 1.2W, in sleep mode 40% of the time with a power use of 0.6W, and in off mode 5% of the time with a power use of 0W, for 10 years.
Geographical representativeness	Europe
Technological representativeness	To control FAN coil units to match with the setpoint
Energy model used	Manufacturing
	Energy model used: China
	Installation
	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27
	Use
	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27
	End of life
	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators

SpaceLogic,Thermostat,FCU,Touch,Modbus,4P,240V,XS,Black - TC907-3A4DLMSAB

Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	9.88E-04	9.85E-04	0*	0*	3.51E-06	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1.77E-01	8.78E-03	1.30E-04	0*	1.68E-01	8.43E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	1.18E-02	1.56E-03	2.99E-05	3.69E-06	1.02E-02	4.74E-05
Contribution to global warming	kg CO ₂ eq	4.39E+01	3.40E+00	2.85E-02	0*	4.03E+01	1.36E-01
Contribution to ozone layer depletion	kg CFC11 eq	3.00E-06	3.64E-07	0*	0*	2.63E-06	4.23E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	1.01E-02	7.93E-04	9.27E-06	0*	9.25E-03	7.11E-06

Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.46E+02	2.30E-02	0*	0*	1.46E+02	0*
Total Primary Energy	MJ	8.54E+02	4.75E+01	4.02E-01	0*	8.06E+02	3.59E-01

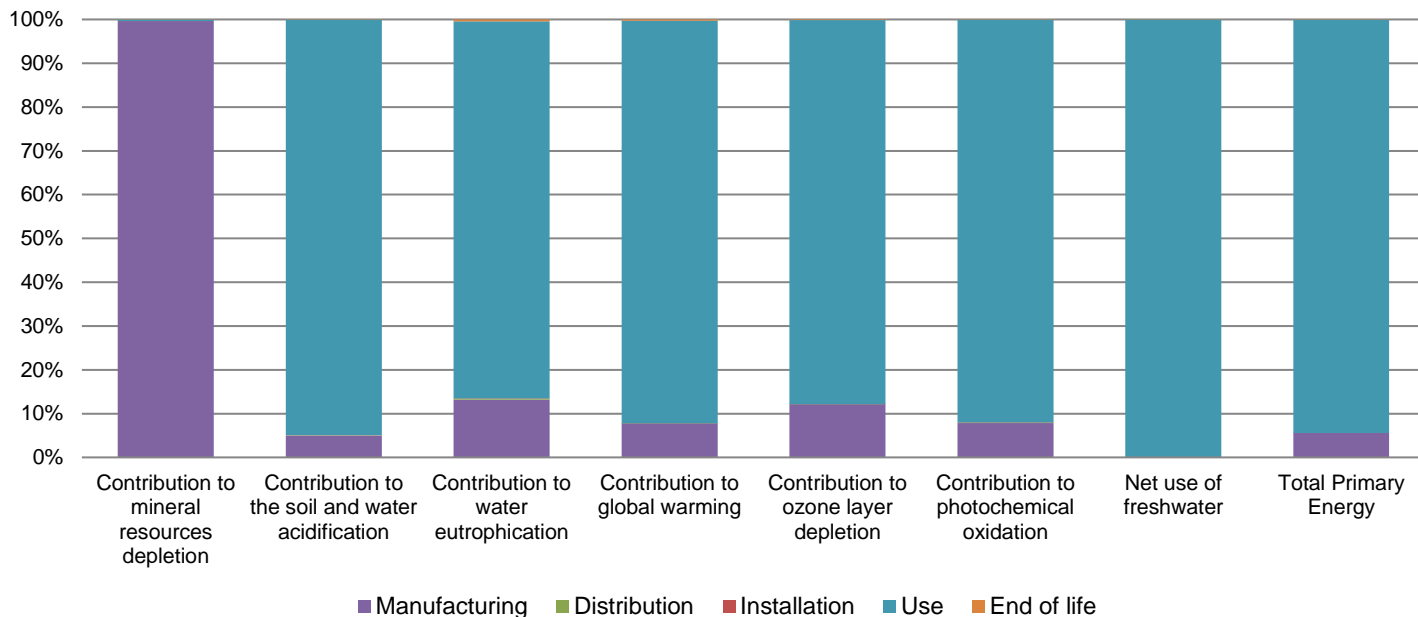

Optional indicators		SpaceLogic,Thermostat,FCU,Touch,Modbus,4P,240V,XS,Black - TC907-3A4DLMSAB					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	4.89E+02	3.06E+01	4.00E-01	0*	4.58E+02	2.92E-01
Contribution to air pollution	m³	2.15E+03	4.10E+02	1.21E+00	0*	1.74E+03	2.67E+00
Contribution to water pollution	m³	2.24E+03	5.63E+02	4.68E+00	4.52E-01	1.66E+03	6.49E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	2.73E-04	2.73E-04	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.04E+02	1.21E+00	0*	0*	1.02E+02	0*
Total use of non-renewable primary energy resources	MJ	7.50E+02	4.63E+01	4.02E-01	0*	7.03E+02	3.59E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.03E+02	1.81E-01	0*	0*	1.02E+02	0*
Use of renewable primary energy resources used as raw material	MJ	1.03E+00	1.03E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	7.48E+02	4.34E+01	4.02E-01	0*	7.03E+02	3.59E-01
Use of non renewable primary energy resources used as raw material	MJ	2.86E+00	2.86E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	3.06E+00	2.69E+00	0*	0*	2.10E-02	3.50E-01
Non hazardous waste disposed	kg	1.53E+02	2.28E+00	0*	0*	1.50E+02	0*
Radioactive waste disposed	kg	1.01E-01	6.65E-04	0*	0*	1.00E-01	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.36E-01	1.37E-02	0*	5.22E-02	0*	7.01E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2.96E-02	0*	0*	0*	0*	2.96E-02
Exported Energy	MJ	1.64E-04	1.54E-05	0*	1.49E-04	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP2007024_V1-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	7/2020	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP2007024_V1-EN

© 2019 - Schneider Electric – All rights reserved

7/2020