


FLAT POLYMERO

311523.002.8 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859073680
D 360, H 100

Ceiling mounting, Wall (surface)
white

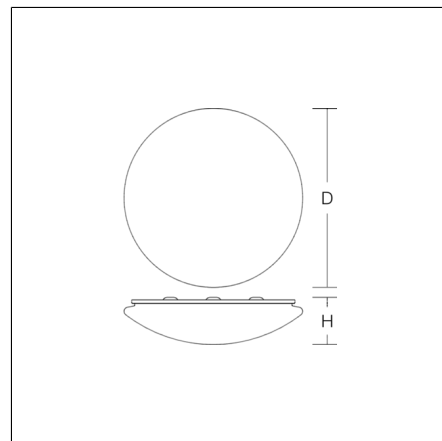

Decorative round surface-mounted luminaire. Base: metal, powder-coated. Diffuser made of plastic (polycarbonate), opal, shockproof. Diffuser fastening: patented push system. Suitable for Ceiling mounting, Wall (surface).

Product specifications

Diameter D	360 mm
Height H	100 mm
Weight	1.34 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	1500 lm
System power	14 W
System efficiency	107 lm/W
Glare evaluation UGR (4H 8H)	19,7
Beam angle	down 115° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	4
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	43 73 91 92 100
Type of protection	IP 40
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK10
Ambient temperature	25 °C
Conformity mark	CE, EAC

Accessories



981804.004
Decorative ring, silver




981804.0042
Decorative ring, nickel

FLAT POLYMERO

311523.002.8 | Ceiling and wall luminaires

Spareparts



08-311161.032
Replacement diffuser