



CorePro LEDcapsule MV



CorePro LEDcapsule 1.9-25W ND G9 830

The LED specialties deliver a high quality light to make themselves to be a true replacement of halogen specialty lamp (such as G9 and R7S). It is particularly suit for task lighting in hotel and restaurants, and ideal for decorative and ambient application. LEDspecialty products deliver huge energy saving and minimize maintenance costs, without any compromise on light quality.

Product data

| General Information | |
|--|--------------------|
| Cap-Base | G9 |
| Nominal lifetime | 15,000 hour(s) |
| Switching Cycle | 50,000 |
| Lighting Technology | LED |
| Flux measurement reference | Sphere |
| | <u> </u> |
| Light Technical | |
| Color Code | 830 [CCT of 3000K] |
| Beam Angle (Nom) | 320 degree(s) |
| Luminous Flux | 220 lm |
| Color Designation | White (WH) |
| Correlated Color Temperature (Nom) | 3000 K |
| Luminous Efficacy (rated) (Nom) | 115 lm/W |
| Color Consistency | <6 |
| Color rendering index (CRI) | 80 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Photobiological safety according to EN 62471 | RG0 |

| Operating and Electrical | |
|---------------------------|-------------|
| Input Frequency | 50 to 60 Hz |
| Power Consumption | 1.9 W |
| Lamp Current (Nom) | 17 mA |
| Wattage Equivalent | 25 W |
| Starting Time (Nom) | 0.5 s |
| Warm-up time to 60% light | 0.5 s |
| Power Factor (Fraction) | 0.5 |
| Voltage (Nom) | 220-240 V |
| | |
| Temperature | |
| T-Case Maximum (Nom) | 92 ℃ |
| | |
| Controls and Dimming | |
| Dimmable | No |
| | |
| Mechanical and Housing | |
| Bulb Finish | Frosted |
| Bulb Material | Plastic |
| Bulb Shape | G9 |
| | |


Datasheet, 2025, March 20 data subject to change

CorePro LEDcapsule MV

| Net Weight (Piece) | 0.006 kg | |
|--|---------------|--|
| | | |
| Approval and Application | | |
| Energy Efficiency Class | E | |
| Suitable For Accent Lighting | No | |
| Energy Consumption kWh/1000 h | 2 kWh | |
| EPREL Registration Number | 1932587 | |
| EU RoHS compliant | Yes | |
| EyeComfort | Yes | |
| Flickering value (PstLM) - Flickering value as per 1 | | |
| EN 61000-3-3 | | |
| Stroboscopic effect visibility measure (SVM) | 0.4 | |
| Ambient temperature range | -20 to +45 °C | |
| | | |
| Application Conditions | | |
| can it be used in closed luminaires | No | |
| | | |


| Product Data | |
|---------------------------------|----------------------------------|
| Order product name | CorePro LEDcapsule 1.9-25W ND G9 |
| | 830 |
| Full product name | CorePro LEDcapsule 1.9-25W ND G9 |
| | 830 |
| Full product code | 872016930183200 |
| Order code | 929003790602 |
| Material Nr. (12NC) | 929003790602 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8720169301832 |
| Numerator - Packs per outer box | 12 |
| EAN/UPC - Case | 8720169301849 |
| | |


Dimensional drawing




| Product | D | С |
|--------------------------------------|-------|-------|
| CorePro LEDcapsule 1.9-25W ND G9 830 | 14 mm | 43 mm |

Photometric data








Light Distribution Diagram - CorePro LEDcapsule 1.9-25W ND G9 830


CorePro LEDcapsule MV


Photometric data

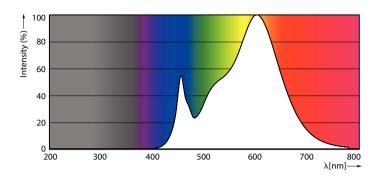

Spectral Power Distribution Colour - CorePro LEDcapsule 1.9-25W ND G9 830

Lifetime

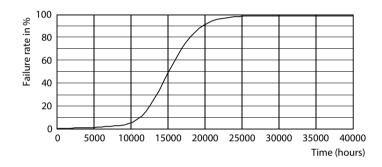

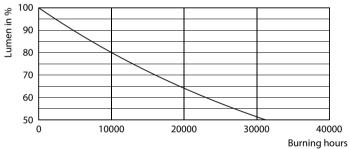

Life Expectancy Diagram

Lumen Maintenance Diagram - CorePro LEDcapsule 1.9-25W ND G9 830



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.