


Classia

RW4033 - RA4033 - RG4033

- Pull-cord pushbutton

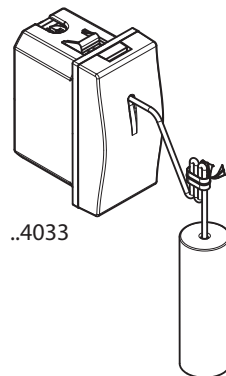

Use

Pushbutton for lighting and other loads with cord-pull.

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 4 mm² max
Stripping length: 9 mm
Compatible with flexible or rigid cables

Range

Designation Item 1 Module

Pushbuttons with cord-pull
1P (NO) 10A 250 Va.c.

RW4033
 RA4033
 RG4033

Color code: White colour Aluminum colour Black colour

Technical characteristics

- Protection index
(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP40

- Mechanical characteristics
Impact test: IK 04


- Material characteristics
Material:
Case: PC (Polycarbonate)
Key cover: ABS - ABS/PC

UV resistant.
Self-extinguishing:
850° C / 30 s for insulating parts holding live parts in place
650° C / 30 s for other parts made of insulating materials

- Electrical characteristics
Voltage: 250 V a.c.
Current: 10A

- Climatic characteristics
Storage temperature: - 10° C to + 70° C Use
temperature: - 5° C to + 35° C

Overall dimensions (mm)

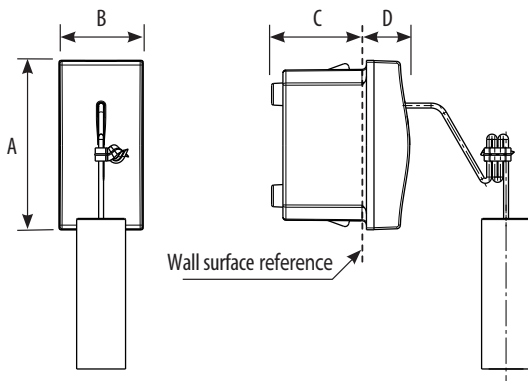

..4033	A	B	C	D
1 Module	45.1	22.3	23.9	12.8

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.
Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1.
Refer to e.catalogue.