



N4185



N4128



N4127

1. USE

Socket outlets : Euro-American standards.

2. RANGE

EURO-AMERICAN STANDARD		Cat. No.
	2 P 16 A 127/250 Vac socket - unshielded tulip contacts - 1 module	<input type="checkbox"/> N4125S <input type="checkbox"/> NT4125S <input type="checkbox"/> L4125S
	2 P 16 A 127/250 Vac socket - Ø 5 mm shielded tulip contacts - 1 module	<input type="checkbox"/> N4125 <input type="checkbox"/> NT4125 <input type="checkbox"/> L4125
	2 P+E 16 A 127/250 Vac universal socket Ø 5 mm unshielded tulip contacts - 2 modules	<input type="checkbox"/> N4126S <input type="checkbox"/> NT4126S <input type="checkbox"/> L4126S
	2 P+E 16 A 127/250 Vac universal duplex socket Ø 5 mm unshielded tulip contacts - 3 modules	<input type="checkbox"/> N4126 <input type="checkbox"/> NT4126 <input type="checkbox"/> L4126
	2 P+E 16 A 127/250 Vac universal duplex socket unshielded tulip contacts - 3 modules	<input type="checkbox"/> N4185S <input type="checkbox"/> NT4185S <input type="checkbox"/> L4185S
	2 P+E 16 A 127/250 Vac universal duplex socket shielded tulip contacts - 3 modules	<input type="checkbox"/> N4185 <input type="checkbox"/> NT4185 <input type="checkbox"/> L4185
AMERICAN STANDARD		
	2 P 15 A 127/250 Vac socket - unshielded tulip contacts - 1 module	<input type="checkbox"/> N4127S <input type="checkbox"/> NT4127S <input type="checkbox"/> L4127S
	2 P 15 A 127/250 Vac socket - shielded tulip contacts - 1 module	<input type="checkbox"/> N4127 <input type="checkbox"/> NT4127 <input type="checkbox"/> L4127
	2 P+E 15 A 127/250 Vac socket unshielded tulip contacts - 1 module	<input type="checkbox"/> N4129S <input type="checkbox"/> NT4129S <input type="checkbox"/> L4129S


2. RANGE (continued)

AMERICAN STANDARD		Cat. No.
	2 P+E 15 A 127/250 Vac socket unshielded tulip contacts - 2 modules	<input type="checkbox"/> N4128S <input type="checkbox"/> NT4128S <input type="checkbox"/> L4128S
	2 P+E 15 A 127/250 Vac socket - shielded tulip contacts - 2 modules	<input type="checkbox"/> N4128 <input type="checkbox"/> NT4128 <input type="checkbox"/> L4128
	2 P+E 15 A 127/250 Vac universal duplex socket unshielded tulip contacts - 3 modules	<input type="checkbox"/> N4188S <input type="checkbox"/> NT4188S <input type="checkbox"/> L4188S
	2 P+E 15 A 127/250 Vac universal duplex socket shielded tulip contacts - 3 modules	<input type="checkbox"/> N4188 <input type="checkbox"/> NT4188 <input type="checkbox"/> L4188
	2 P+E 15 A 127/250 Vac GFCI socket - 3 modules	<input type="checkbox"/> N4188GF <input type="checkbox"/> NT4188GF <input type="checkbox"/> L4188GF

Colours code:

- White
- Tech
- Anthracite

3. OVERALL DIMENSIONS (mm)

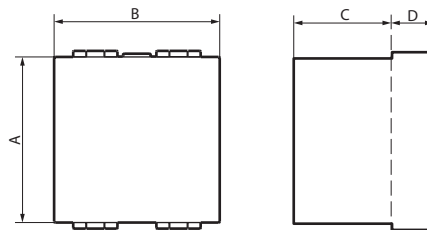

	A	B	C*	D*
1 module	22	44	26	11
2 modules	44	44	26	11
3 modules	66	44	26	13

*Average overall dimensions depending of the standard.

4. CONNECTION

Screw clamps:

Stripping length, rigid or flexible cables: 9 mm

Automatic clamps:

Stripping length, rigid or flexible cables: 12 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21 D

Impact test: IK 04

■ 5.2 Material characteristics

Material: Polycarbonate

Colour: Anthracite, White, Tech

Halogen free.

UV resistant.

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.

+ 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 127/250 VAC

Current: 15/16 A

■ 5.4 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.