

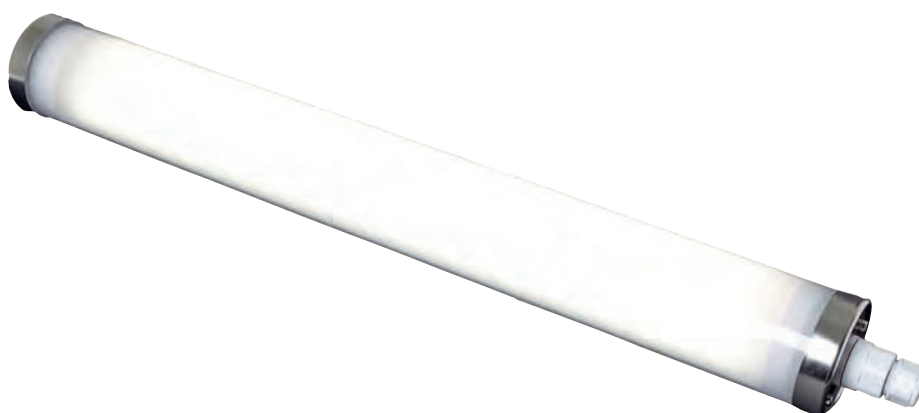


# Apex

- Industrial IP69K tubular surface or suspended Ideal for harsh applications such as garages, food industry, chemical plants and agriculture
- IP69K rating allows cleaning with high pressure and high temperature water
- 316 Marine grade stainless steel end caps and fixings
- PMMA IK09 body, resistant to mechanical stress
- Quick and easy electrical connection without opening the luminaire
- Fast latching stainless steel mounting brackets provided, with optional suspension kit for versatile mounting
- Non-dimmable

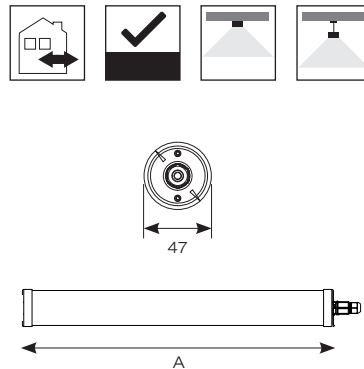

AAPEXLED/4 fitted with AAPEXLED/SK



AAPEXLED/4 Surface Mounted



Screwless, fast-fit terminals for ease and speed of installation

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220-240V	50Hz	-20°C to 40°C	L80 B10 60,000	Ra 80	3	100/130°	1	IP69K	IK09

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LMW	A	TRADE
AAPEXLED/4	Cool White - 1200mm	35W	4000K	5680lm	162lm	1200mm	£170.00
AAPEXLED/5	Cool White - 1500mm	45W	4000K	7660lm	170lm	1500mm	£196.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AAPEXLED/SK	Suspension Kit	£12.70

