



Other LEDtube

LED 3.5W 500mm S14D WW ND 1CT/4

Philips LEDtube integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamping in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environmentally friendly.

Product data

General Information	
Cap-Base	S14D [S14d]
Nominal lifetime	30,000 hour(s)
Switching Cycle	50,000
Rated Lifetime (Hours)	30,000 hour(s)
Lighting Technology	LED
Flux measurement reference	Sphere

Light Technical	
Color Code	827 [CCT of 2700K]
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	140 degree(s)
Luminous Flux	375 lumen
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	107.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz

Power Consumption	3.5 W
Lamp Current (Nom)	32 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.4
Voltage (Nom)	220-240 V

Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	30 °C

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	500 mm
Bulb Shape	Others

Approval and Application	
Energy Saving Product	Yes

Other LEDtube


Approval Marks	RoHS compliance CE marking KEMA Keur certificate
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	387,348
EU RoHS compliant	Yes

Product Data

Full product code	871951426364200
Order product name	LED 3.5W 500mm S14D WW ND 1CT/4



Order code	929002444101
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material number (12NC)	929002444101
Full product name	LED 3.5W 500mm S14D WW ND 1CT/4
EAN/UPC - Case	8719514263659

Dimensional drawing

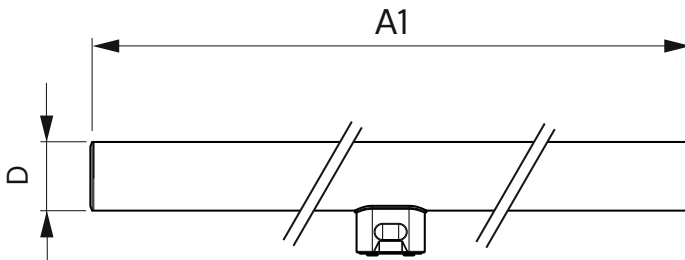

Product	D1	D2	A1	A2	A3
LED 3.5W 500mm S14D WW ND 1CT/4	30 mm	30 mm	266.8 mm		299 mm

Photometric data





Spectral Power Distribution Colour - LED 3.5W 500mm S14D WW ND 1CT/4

Light Distribution Diagram - LED 3.5W 500mm S14D WW ND 1CT/4

The table provides technical specifications for the LED tube, including a light distribution diagram, a table of beam spread and intensity, and a table of beam spread and intensity.



Other LEDtube

Lifetime

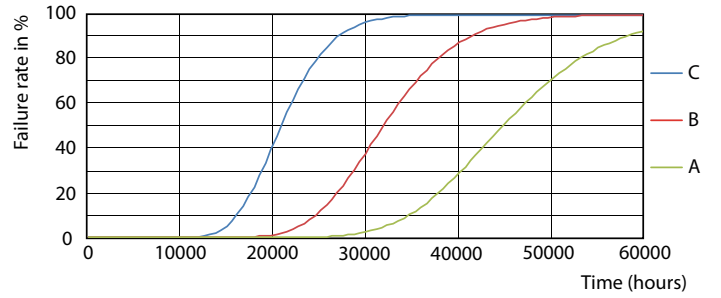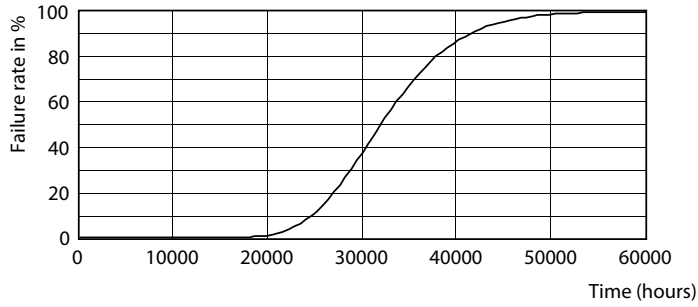


Life Expectancy Diagram - LED 3.5W 500mm S14D WW ND 1CT/4

Life Expectancy Diagram - LED 3.5W 500mm S14D WW ND 1CT/4

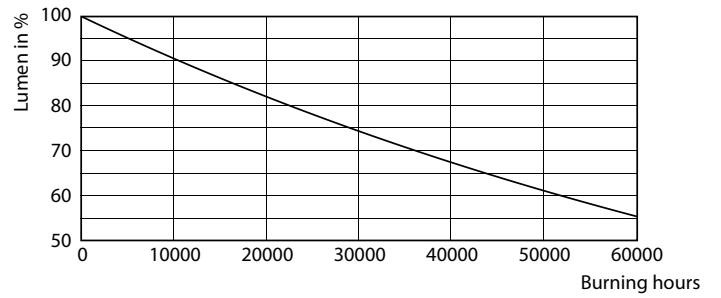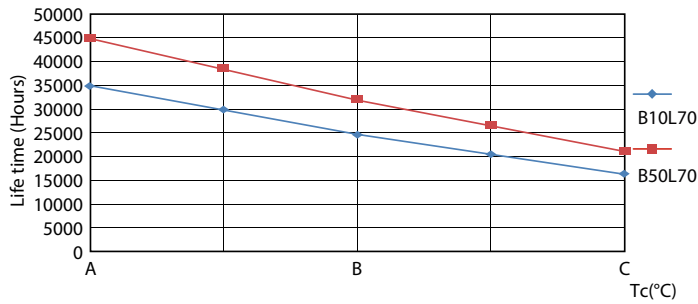

Life Expectancy Diagram - LED 3.5W 500mm S14D WW ND 1CT/4

Lumen Maintenance Diagram - LED 3.5W 500mm S14D WW ND 1CT/4

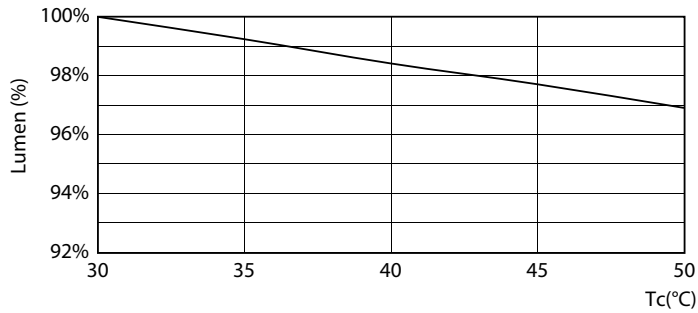

Lumen Maintenance Diagram - LED 3.5W 500mm S14D WW ND 1CT/4

Other LEDtube

