


Thunder ECO

- Robust, high performance LED non-corrosive suitable for ancillary areas and industrial applications
- Power selectable; offering high and low output option in each length
- Twist off end cap and push fit terminals aid fast and easy installation
- Supplied complete with versatile stainless steel mounting clips. Clips can be located anywhere along the spine of the luminaire
- Non-Dimmable

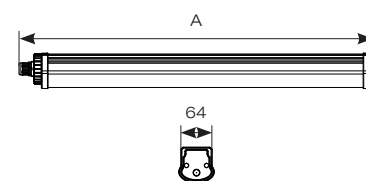

Cable Entry Point

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220-240V	50Hz	-20°C to 40°C	L80 54,000	Ra.80	6	100/140°	1	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	A	TRADE
ATHEC02/CW	Cool White - 1 x 600mm	10/19W		1210/2080lm	121/109lm	635mm	£36.00
ATHEC04/CW	Cool White - 1 x 1200mm	21/31W	4000K	2750/3850lm	131/124lm	1235mm	£46.00
ATHEC05/CW	Cool White - 1 x 1500mm	32/47W		4250/5830lm	133/124lm	1535mm	£57.00
ATHEC02/DL	Daylight - 1 x 600mm	10/19W		1230/2120lm	123/112lm	635mm	£36.00
ATHEC04/DL	Daylight - 1 x 1200mm	21/31W	6500K	2650/3760lm	126/118lm	1235mm	£46.00
ATHEC05/DL	Daylight - 1 x 1500mm	32/47W		4050/5720lm	131/122lm	1535mm	£57.00