



# **BR/R LED**

### PILA LED CLA 40W P45 E14 WW CL ND 1CT/10

Philips BR Dimmable LED Lamps with AirFlux technology provide a soft, diffused level of light and smooth dimming to reduce glare. The sleek, lightweight design is ideal for downlighting.

#### **Product data**

General Information	
Cap-Base	E14 [ E14]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000X
Light Technical	
Color Code	827 [ CCT of 2700K]
Beam Angle (Nom)	300 °
Luminous Flux (Nom)	470 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	109.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom) 70 %	
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Nom)	4.3 W
Lamp Current (Nom)	40 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.4 s
Warm Up Time to 60% Light (Nom)	0.4 s


Power Factor (Nom)	0.52
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	45 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	P45 [ P 45mm]
Approval and Application	
Energy Efficiency Label (EEL)	F
Energy Consumption kWh/1000 h	5 kWh
Product Data	
Full product code	872790096630500
Order product name	PILA LED CLA 40W P45 E14 WW CL ND 1CT/10
EAN/UPC - Product	8727900966305
Order code	929001890431
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10

Datasheet, 2021, August 5 data subject to change

#### **BR/R LED**

Material Nr. (12NC)	929001890431
Net Weight (Piece)	13.000 g


#### Dimensional drawing





Candle P45 4.3-40W 470lm 2700K E14 ND

## Product D C PILA LED CLA 40W P45 E14 WW CL ND 1CT/10 45 mm 82 mm


#### Photometric data

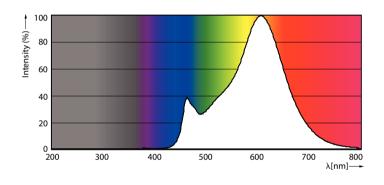






LEDCandle CLA 4.3-40W E14 B35 Clear 827 ND




LEDLuster CLA 4.3-40W E14 P45 Clear 827 ND

#### **BR/R LED**

#### Lifetime

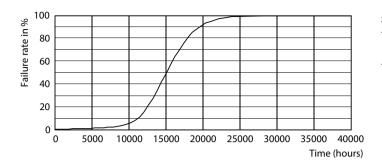



LEDCandle CLA 4.3-40W E14 B35 Clear 827 ND

LEDCandle CLA 4.3-40W E14 B35 Clear 827 ND

