


Wolf CCT Wallpack



- Modern, robust die-cast aluminium low glare wall pack suitable for commercial and industrial applications
- Advanced lens technology offers wide distribution for optimum spacing and uniformity; whilst ensuring minimal uplight and light pollution
- Reduced light pollution with less than 2% upward light distribution
- Helps with compliance with Dark Skies recommendations
- Power selectable; offering a choice of 3 outputs, in one luminaire
- High efficiency up to 140 Lm/W
- Electrostatic paint finish for enhanced corrosion resistance
- Multiple conduit entry and BESA fixing points
- 20mm East and West side entry for surface conduit and through-wire
- Dimmable and Smart options available

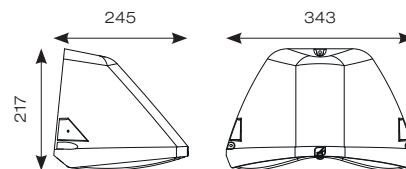


WOLF
WALLPACK



Black



Silver Grey



Powered by
CASAMBI

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220-240V	50/60Hz	-20°C to 40°C	L80 72,000	Ra 80	6	70/140°	1	IP65	IK10

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AWOLF/BLK	CCT Selectable - Black	18/20/30W	3000K/4000K	2200/2400/3600lm (4000K)	120lm (4000K)	£139.00
AWOLF/SG	CCT Selectable - Silver Grey					£139.00

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £90.00	/OCTO	OCTO Smart Control	+ £195.00
/SM3	Self-Test Emergency	+ £121.00	/MWS	Integral Microwave Sensor	+ £60.00
/DM3	DALI emergency	+ £205.00	/PC	Electronic Photocell	+ £36.00
			/DD	Digital Dimming (DD1/DD3/DD4)	+ £95.00

