# Lighting

**PHILIPS** 

# CorePro LEDtube EM/ Mains T8

# F A G

# CorePro LEDtube 600mm 8W 865 T8

Philips CorePro LEDtubes are the quick and easy way to replace T8 fluorescent or other LED tubes with a fast pack back time. Not only does the Core range of LEDtubes require a low initial investment, but LED energy efficiency also delivers instant savings that you can bank on over a long and reliable lifetime. Plus, with the same lamp size and light distribution as fluorescent alternatives, you'll never know the difference. There are two ways to install these LED tubes: Rewire your existing fluorescent-based luminaires so the CorePro LEDtubes work directly on the Mains. Or simply change the fluorescent starter to an LED starter that can be used with your Electromagnetic ballasts.

#### Warnings and Safety

- NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.
- Installation must be done according to the installation diagrams provided with the lamp or available online. Installation must be done by a certified professional.

#### **Product data**

General Information	
Cap-Base	G13
Nominal lifetime	50,000 hour(s)
Switching Cycle	200,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Color Code	865 [CCT of 6500K]
Beam Angle (Nom)	240 degree(s)


Luminous Flux	800 lm
Color Designation	Cool Daylight
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	100 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RGO

# CorePro LEDtube EM/Mains T8

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	8 W
Lamp Current (Nom)	46 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
Ballast Compatibility	EM/Mains
LED alternative to fluorescent lamp power	18 W
Inrush current at mains	4.27
Max. lamp no. on MCB B type 10A - Mains	119
Max. lamp no. on MCB B type 10A - EM ballast	154
without Compensation Capacitor.	
Max. lamp no. on MCB B type 10A - EM ballast	24
with Compensation Capacitor.	
Max. lamp no. on MCB B type 16A - Mains	191
Max. lamp no. on MCB B type 16A – EM ballast	246
without Compensation Capacitor.	
Max. lamp no. on MCB B type 16A – EM ballast	39
with Compensation Capacitor.	
Temperature	
T-Case Maximum (Nom)	50 ℃
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	600 mm
Bulb Shape	Т8

Net Weight (Piece)	0.220 kg			
Approval and Application				
Energy Efficiency Class	F			
Energy Saving Product	Yes			
Approval Marks	RoHS compliance CE marking			
	KEMA Keur certificate			
Energy Consumption kWh/1000 h	8 kWh			
EPREL Registration Number	1827695			
CE mark	Yes			
EU RoHS compliant	Yes			
Flickering value (PstLM) - Flickering value as per	1			
EN 61000-3-3				
Stroboscopic effect visibility measure (SVM)	0.4			
Ambient temperature range	-20 to +45 °C			
Application Conditions				
can it be used in closed luminaires	Yes			
Product Data				
Order product name	CorePro LEDtube 600mm 8W 86			
	Т8			
Full product name	CorePro LEDtube 600mm 8W 86			
	Т8			
Full product code	871951432533300			
Order code	929003022202			
Material Nr. (12NC)	929003022202			
Numerator - Quantity Per Pack	1			
EAN/UPC - Product/Case	8719514325333			
Numerator - Packs per outer box	10			
EAN/UPC - Case	8719514325340			


#### Dimensional drawing




Product	D1	D2	A1	A2	A3
CorePro LEDtube 600mm 8W 865	25.7 mm	28 mm	588.5 mm	595.5 mm	602.5 mm
Т8					

# **CorePro LEDtube EM/Mains T8**


#### Photometric data



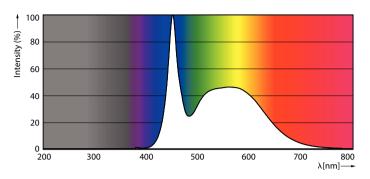


General uniform lighting - CorePro LEDtube 600mm 8W 865 T8


Spectral Power Distribution Colour - CorePro LEDtube 600mm 8W 865 T8



Light Distribution Diagram - CorePro LEDtube 600mm 8W 865 T8

#### Lifetime

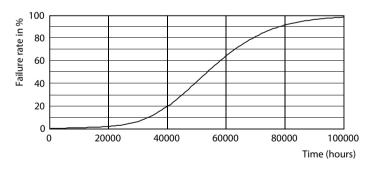




Life Expectancy Diagram

FailureRate

100

## **CorePro LEDtube EM/Mains T8**

Lifetime

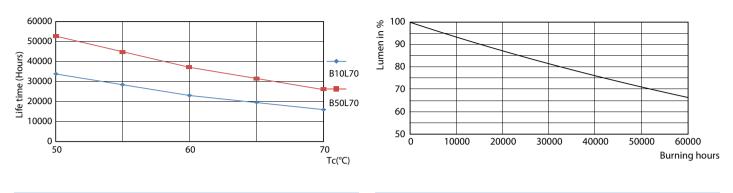

LifetimeVsTc

Lumen Maintenance Diagram - CorePro LEDtube 600mm 8W 865 T8



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2025, March 17 - data subject to change