


# GSUN 3

672522.002 | Luminaires for escape route identification



Ceiling and wall luminaires  
4051859712060  
L 241, B 126, H 147

Ceiling mounting, Wall (surface)  
white

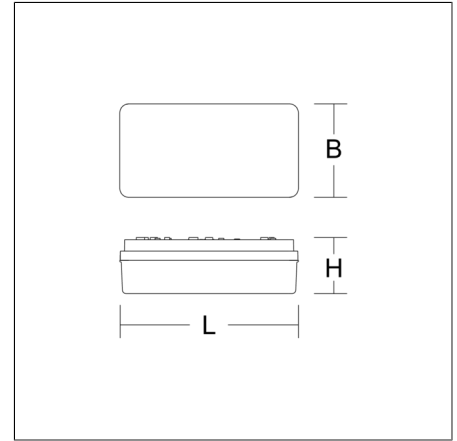

Luminaire for escape route identification. Base: plastic Diffuser: plastic, opal 4 plastic foils with escape route motifs included (ISO 7010). Suitable for Ceiling mounting, Wall (surface). Pendant luminaire also possible with accessories. Driver integrated. Suitable for connection to central battery systems.

## Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Viewing Distance	21 m
Length L	241 mm
Width B	126 mm
Height H	147 mm
Weight	370 g
Light source	LED
Colour temperature	4000 K
System power, mains operation	4 W
System power, emergency operation	4 W
Colour rendering index (CRI)	80
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 Hz, 60 Hz
Luminaires on B10A fuse	17
Luminaires on B16A fuse	27
Luminaires on C10A fuse	28
Luminaires on C16A fuse	45
Inrush current / Inrush current duration	27 A / 250 µs
Type of protection	IP 54
Protection class	II
Filament test	650 °C
Impact resistance	IK03
Ambient temperature for maintained power	-25 °C ... + 25 °C
Ambient temperature for non-maintained power mode	-25 °C ... + 40 °C
Conformity mark	CE

## Accessories



981167.002  
Ball impact guard



983100.000  
Mounting kit for chains/cable suspensions

# GSUN 3

672522.002 | Luminaires for escape route identification



981144.002.1  
Wall bracket



983101.002  
Suspension system