


# Unity 125 Downlight



- IP44 compact high performance architectural downlight suitable for commercial, hospitality and retail applications
- Die-cast aluminium construction, powder coated and 30° cut-off angle
- Mirror finished anodized reflector
- Anti-glare design to create visual comfort
- Remote driver with plug and play connection
- Dimmable and emergency options
- Powered by Tridonic

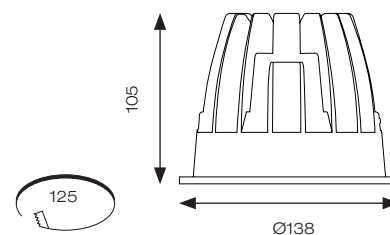

**OCTO**  
Option  
Available

Powered by  
**CASAMBI**



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50/60Hz	-20°C to 25°C	L80 60,000	Ra 90	3	65°	2	IP44

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR	TRADE
AULED125D	Cool White	21W	4000K	1521lm	72lm	17	£70.50
AULED125D/WW	Warm White	21W	3000K	1386lm	66lm	17	£70.50

\* UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £90.00	/OCTO	OCTO Smart Control	+ £155.00
/SM3	Self-Test Emergency	+ £121.00	/DD	Digital Dimming (DD1/DD3/DD4)	+ £95.00
/DM3	DALI Emergency	+ £205.00			

