




Ceiling luminaires
4051859531388
L 235, B 40, H 220

Ceiling mounting
anodised aluminium

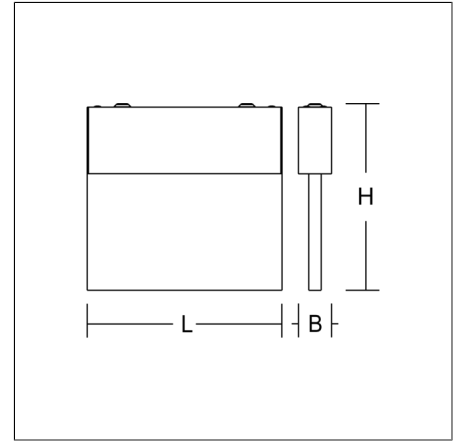

Luminaire for escape route identification. Housing: extruded aluminium profile, anodised or powder-coated. Display panel: highly transparent panel, plastic, with legend on one side/both sides. Electronic ballast included. Self-contained system with automatic self-test and feedback to the RZB monitoring system MULTIDIGIT. Please indicate legend number when placing your order!

Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	MultiDigit
Battery	NiMh
Duration	3 h
Operating mode	maintained power mode
Viewing Distance	19 m
Length L	235 mm
Width B	40 mm
Height H	220 mm
Weight	1.46 kg
Light source	LED
Colour temperature	4000 K
System power, mains operation	4,7 W
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Transformer
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Type of protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	0 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE

Accessories



981639.010
Suspension system



981639.040
Suspension system



981581.004
Wall mounting



981701.004
Suspension system

HALYXX

671742.004.1.04 | Luminaires for escape route identification



982763.000
Suspension cable set