



CorePro Plastic LEDcandles & lusters



CorePro lustre ND 7-60W E14 840 P48 FR

The CorePro LED candles and lusters are designed for retrofit replacement of incandescent lamps and are particularly attractive for chandeliers. They are compatible with fixtures with an E14 holder for candles and E14 or E27 holders for lusters and are available in multiple color temperatures. LED lamps deliver huge energy savings of up to 80% energy-saving compared with halogen lamps and provide excellent quality of light. By offering a lifetime of 15,000 hours it lowers maintenance costs. The CorePro LED candles and lusters are perfect for your basic lighting needs.

Product data

| General Information | |
|---------------------------------------|--------------------|
| Cap-Base | E14 |
| Nominal lifetime | 15,000 hour(s) |
| Switching Cycle | 50,000 |
| Lighting Technology | LED |
| Flux measurement reference | Sphere |
| | |
| Light Technical | |
| Color Code | 840 [CCT of 4000K] |
| Luminous Flux | 806 lm |
| Color Designation | Cool White (CW) |
| Correlated Color Temperature (Nom) | 4000 K |
| Luminous Efficacy (rated) (Nom) | 115.00 lm/W |
| Color Consistency | <6 |
| Color rendering index (CRI) | 80 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| | |

| DI . I . I . I | DC4 |
|--|-------------|
| Photobiological safety according to EN 62471 | RG1 |
| | |
| Operating and Electrical | |
| Line Frequency | 50 to 60 Hz |
| Input Frequency | 50 to 60 Hz |
| Power Consumption | 7 W |
| Lamp Current (Nom) | 59 mA |
| Wattage Equivalent | 60 W |
| Starting Time (Nom) | 0.5 s |
| Warm-up time to 60% light | 0.5 s |
| Power Factor (Fraction) | 0.51 |
| Voltage (Nom) | 220-240 V |
| | |
| Temperature | |
| T-Case Maximum (Nom) | 87 °C |


Datasheet, 2025, March 17 data subject to change

CorePro Plastic LEDcandles & lusters

| Controls and Dimming | |
|--|----------|
| Dimmable | No |
| | |
| Mechanical and Housing | |
| Bulb Finish | Frosted |
| Bulb Shape | P48 |
| Net Weight (Piece) | 0.023 kg |
| | |
| Approval and Application | |
| Energy Efficiency Class | E |
| Energy Consumption kWh/1000 h | 7 kWh |
| EPREL Registration Number | 453216 |
| CE mark | Yes |
| EU RoHS compliant | Yes |
| EyeComfort | Yes |
| Flickering value (PstLM) - Flickering value as | 1 |
| per EN 61000-3-3 | |
| Stroboscopic effect visibility measure (SVM) | 0.4 |


| No |
|-------------------------------------|
| |
| |
| CorePro lustre ND 7-60W E14 840 P48 |
| FR |
| CorePro lustre ND 7-60W E14 840 P48 |
| FR |
| 871951431308800 |
| 929002973302 |
| 929002973302 |
| 1 |
| 8719514313088 |
| 10 |
| 8719514313095 |
| |

Dimensional drawing




| Product | D | С |
|--|-------|-------|
| CorePro lustre ND 7-60W E14 840 P48 FR | 48 mm | 95 mm |

Photometric data




General uniform lighting - CorePro lustre ND 7-60W E14 840 P48 FR

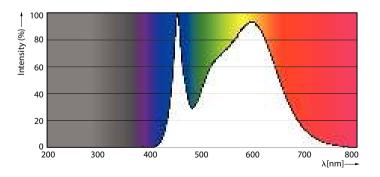

Spectral Power Distribution Colour - CorePro lustre ND 7-60W E14 840 P48


CorePro Plastic LEDcandles & lusters


Photometric data



Light Distribution Diagram - CorePro lustre ND 7-60W E14 840 P48 FR

Lifetime

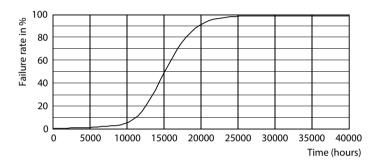

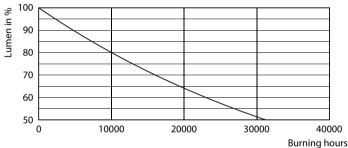

Life Expectancy Diagram

Lumen Maintenance Diagram - CorePro lustre ND 7-60W E14 840 P48 FR



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.