


Product Data Sheet

GW82206


EXTRO Range

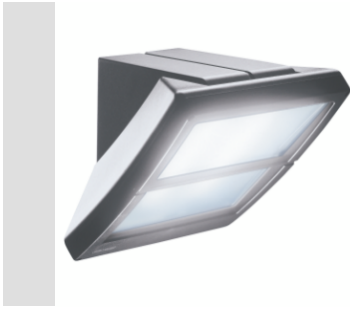


Multifunctional lighting device for residential and urban areas, with polycarbonate body and sanded diffuser. Possibility of wall, ceiling, pole and column installation in graphite gray, white and midnight blue colors. Also available in the 13W and 26W LED version.

Application	Indoor / Outdoor	Version	Standard
Insulation class	I	Colour	Graphite grey
IP degree	IP55	Mechanical resistance	IK09
Glow Wire Test	850 °C	Minimum distance from the illuminated object	1 m
Operating temperature	-25 +25 °C	Efficiency class of compatible lamps	D ÷ A+
Max lamp power	100 W	Lamp holder	E27
Weight (kg)	2.4	Electrocod	2415

DIMENSIONAL

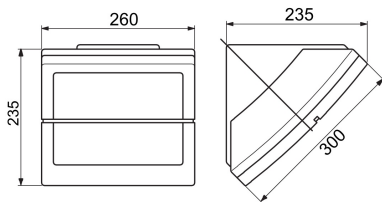

PHOTOMETRIC DISTRIBUTION

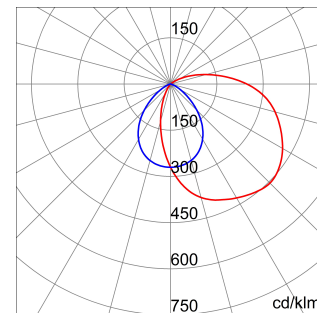

TECHNICAL SYMBOLOGY



IP
IP55

IK
IK09

GWT
850 °C



STANDARDS/APPROVALS

