


LIGHTSTREAM mini

722285.004 | Spotlights



Spotlights
4051859956105
L 395, B 166, H 49

Pole mounting, Universal mounting system
silver, matt (approx. RAL 9006)

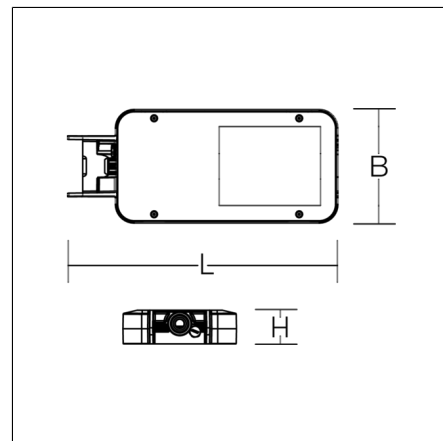

Clever combination of spotlight and pole luminaire in one. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. Tilt angle can be adjusted and locked in 5 degree steps featuring angular scale. With membrane valve as a standard to avoid condensed water. Cover clear single-pane toughened glass, edge printed. Cover screwed to housing. Lens system made of plastic (PMMA). Replaceable LED spot modules according to ZHAGA standards. Symmetrical light distribution. Constant light output (CLO). With NFC programming interface. Pre-assembled connection cable, length 0.5 m. Modular design: Mounting set must be ordered separately.

Product specifications

Length L	395 mm
Width B	166 mm
Height H	49 mm
Weight	2.4 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	4500 lm
System power	31 W
System efficiency	145 lm/W
Glare evaluation UGR (4H 8H)	27,4
Beam angle	90°/90°
Rated life	100000 h (L90/B50)
Colour rendering index (CRI)	70
Colour tolerance	5
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	18
Luminaires on B16A fuse	28
Inrush current / Inrush current duration	26 A / 180 µs
CIE Flux Code / CEN Flux Code	65 93 99 100 100
Type of protection	IP 66
Protection class	I
Filament test	960 °C
Impact resistance	IK06
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE

Accessories



61199.009
Fuse box



982638.003
Junction box H with strain relief.

LIGHTSTREAM mini

722285.004 | Spotlights



982977.003



982974.003



982058.000
Wall bracket, 500 mm, uncoated



982086.000
Wall bracket, 1000 mm, uncoated



982049.000
Pole attachment (double): for spigot 60 mm, unpainted



982049.004
Pole attachment (double): for spigot 60 mm, silver, matt (approx. RAL 9006)



982050.000
Pole attachment (double): for spigot 76 mm, unpainted



982050.004
Pole attachment (double): for spigot 76 mm, silver, matt (approx. RAL 9006)



982524.004
Adapter set for 4-fold configuration (4 x 90°)



982092.000
Pole clip for pole diameter 95 - 114 mm



982093.000
Pole clip for pole diameter 115 - 135 mm



982591.000
Wall bracket, uncoated



982591.004
Wall bracket, powder-coated



982588.000
Pole bracket for 2 luminaires, uncoated



982588.004
Pole bracket for 2 luminaires, powder-coated



982589.000
Pole bracket for 3 luminaires, uncoated



982589.004
Pole bracket for 3 luminaires, powder-coated



982590.000
Pole bracket for 4 luminaires, uncoated



982590.004
Pole bracket for 4 luminaires, powder-coated



982562.000
Reducing adapter Ø 60 mm




982983.000
Reducing adapter Ø 42 mm

Modules



982978.004
Pole attachment for 76 mm spigot.



983117.004
Mounting bracket



983164.004
Mounting bracket