



F A G

CorePro LEDspot Reflectors

CoreProLEDspot ND1.4-25W R50 E14 827 36D

CorePro LEDspots Reflectors are a perfect fit for spot lighting and deliver warm halogen-like light. They are compatible with most existing fixtures with a GU10 or E27 base and are designed as a retrofit replacement for halogen or incandescent spots. CorePro LEDspots Reflectors deliver significant energy savings and minimize maintenance cost.

Product data

General Information	
Cap-Base	E14
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	36 degree(s)
Luminous Flux	105 lm
Luminous Intensity (Nom)	210 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	75.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	105 lm

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	1.4 W
Lamp Current (Nom)	13 mA
Wattage Equivalent	25 W
Starting Time (Nom)	0.1 s
Warm-up time to 60% light	0.1 s
Power Factor (Fraction)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	42 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	R50


Datasheet, 2025, January 10 data subject to change

CorePro LEDspot Reflectors

Net Weight (Piece)	0.054 kg
Approval and Application	
Energy Efficiency Class	F
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	2 kWh
EPREL Registration Number	397640
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as	1
per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4
Application Conditions	
can it be used in closed luminaires	No


CoreProLEDspot ND1.4-25W R50 E14
827 36D
CoreProLEDspot ND1.4-25W R50 E14
827 36D
871869681173300
929001891002
929001891002
1
8718696811733
6
8718696811740


Dimensional drawing



Product	D	С
CoreProLEDspot ND1.4-25W R50 E14 827 36D	50 mm	84 mm

Photometric data

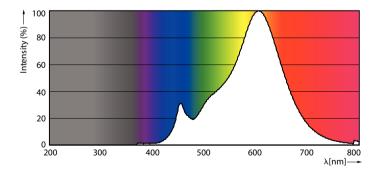




Spectral Power Distribution Colour - CoreProLEDspot ND1.4-25W R50 E14 827 36D

Light Distribution Diagram - CoreProLEDspot ND1.4-25W R50 E14 827 36D

CorePro LEDspot Reflectors


Photometric data




CalculuX Preservetrics 4.5 Philips Lighting 8.V. Progr. 117

Accent Lighting Spots - CoreProLEDspot ND1.4-25W R50 E14 827 36D

Lifetime

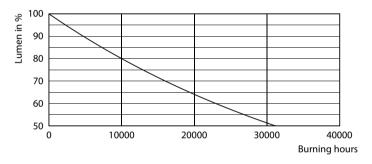

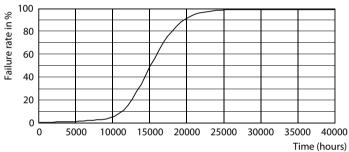

Lumen Maintenance Diagram - CoreProLEDspot ND1.4-25W R50 E14 827 36D

LEDspot CorePro 1.8-30W E14 R39 827 36D ND



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.