


FLAT BASIC

211401.002 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859075554
D 500, H 150

Ceiling mounting, Wall (surface)
pure white (RAL 9010)

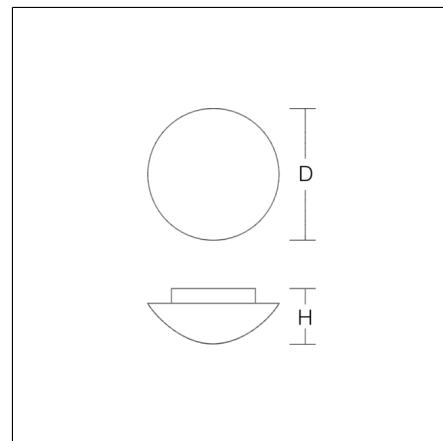

Decorative round surface-mounted luminaire. Base: plastic. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Glass fastening: bayonet fixing. Triplex glass produces particularly homogeneous, soft and glare free lighting. Suitable for Ceiling mounting, Wall (surface).

Product specifications

Diameter D	500 mm
Height H	150 mm
Weight	5.92 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	2150 lm
System power	19 W
System efficiency	113 lm/W
Glare evaluation UGR (4H 8H)	18,5
Beam angle	down 117° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	Phase cut-off/cut-on
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	84
Luminaires on B16A fuse	135
Luminaires on C10A fuse	84
Luminaires on C16A fuse	135
Inrush current / Inrush current duration	0.22 A / 200 µs
CIE Flux Code / CEN Flux Code	43 72 90 87 100
Type of protection	IP 43 ceiling mounting IP 44 wall mounting
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK03
Ambient temperature	25 °C
Conformity mark	CE, EAC

Spareparts



05-211071.002
Replacement glass