


PRODUCT DATASHEET

LN SF Suspension Kit

LINEAR SURFACE SUSPENSION KIT | Wire suspension kit for Linear Surface IP44 family

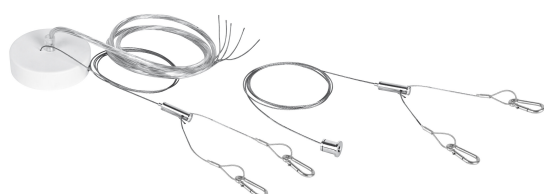

Product benefits

- Suspension kit for easy and quick installation

Product features


- Complete suspension kit (ceiling connection box, connector, 2 suspension wires and transparent cable)
- 5-pole terminal for a quick and easy electrical connection
- Adjustable steel wires, maximum length each: 1.5 m
- Ceiling box, white color powder coated steel, with 5-poles push-fit terminal (5 x 2,5 mm²)
- Length of electrical cable: 3 m



TECHNICAL DATA

Dimensions & Weight

| | |
|----------------|----------|
| Diameter | 99,0 mm |
| Length | 1500 mm |
| Product weight | 410.00 g |
| Cable length | 3000 mm |

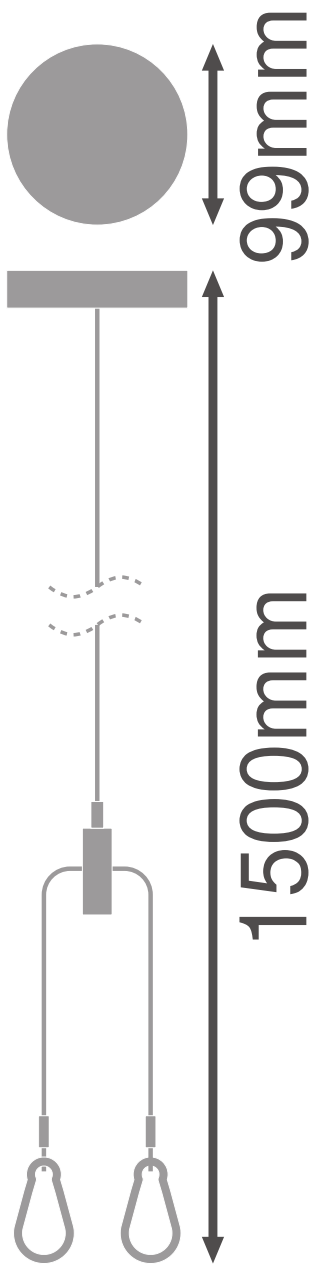

LN SF Suspension Kit

Materials & Colors

| | |
|---------------|--------|
| Product color | Silver |
| Body material | Steel |


Application & Mounting

| | |
|-------------------|---------|
| Mounting location | Ceiling |
|-------------------|---------|

Certificates & Standards

| | |
|--|----|
| Luminaire with limited surface temperature, "D sign" | No |
|--|----|

DOWNLOAD DATA

| Tender texts | Document name |
|---|---|
|  Tender documents | LINEAR SURFACE SUSPENSION KIT Suspension Kit-EN |

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075607514 | Folding box 1 | 80 mm x 200 mm x 150 mm | 474.00 g | 2.40 dm ³ |
| 4058075607521 | Shipping box 20 | 425 mm x 420 mm x 320 mm | 10180.00 g | 57.12 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.