



MASTER LEDspot ExpertColor LV



MAS LED ExpertColor 6.7-35W MR16 930 24D

MASTER LEDspot LV ExpertColor creates a warm and comfortable ambience for hospitality venues, homes and restaurants. It creates such an ambience with superior lighting that has a customized spectrum, high CRI, and deep dimming feature. The result? A beautiful lighting experience. What's more, the innovative, trimless lens design will suit almost any interior decor with its clean and neat look. In addition, you can take advantage of the full ExpertColor family, which also includes LEDspot MV and LEDspot Par lamps.

Product data

General Information	
Cap-Base	GU5.3
Nominal lifetime	40,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	24 degree(s)
Luminous Flux	440 lm
Luminous Intensity (Nom)	2,200 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	65.00 lm/W
Color Consistency	<3
Color rendering index (CRI)	97
LLMF At End Of Nominal Lifetime (Nom)	70 %

Luminous Flux in 90° Cone (Rated)	440 lm		
Photobiological safety according to EN 62471 RG1			
Operating and Electrical			
Line Frequency	- Hz		
Input Frequency	- Hz		
Power Consumption	6.7 W		
Lamp Current (Nom)	650 mA		
Wattage Equivalent	35 W		
Starting Time (Nom)	0.5 s		
Warm-up time to 60% light	0.5 s		
Power Factor (Fraction)	0.7		
Voltage (Nom)	ac electronic 12 V		
Temperature			
T-Case Maximum (Nom)	92 ℃		


Datasheet, 2025, March 17 data subject to change

MASTER LEDspot ExpertColor LV

Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Shape	MR16
Net Weight (Piece)	0.052 kg
Approval and Application	
Energy Efficiency Class	G
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	7 kWh
EPREL Registration Number	624214
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Application Conditions	
can it be used in closed luminaires	No


MAS LED ExpertColor 6.7-35W MR16 930
24D
MAS LED ExpertColor 6.7-35W MR16 930
24D
871951435855300
929003079202
929003079202
1
8719514358553
10
8719514358560

Dimensional drawing




Product	D	С
MAS LED ExpertColor 6.7-35W MR16 930 24D	50.5 mm	46 mm

Photometric data




Light Distribution Diagram - MAS LED ExpertColor 6.7-35W MR16 930 24D

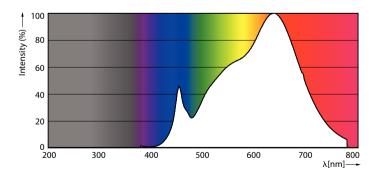

Spectral Power Distribution Colour - MAS LED ExpertColor 6.7-35W MR16 930 24D

MASTER LEDspot ExpertColor LV


Photometric data




Calculus Phonameurics 4.5 Philips Lighting B.V. Fago: 177

Accent Lighting Spots - MAS LED ExpertColor 6.7-35W MR16 930 24D

Lifetime

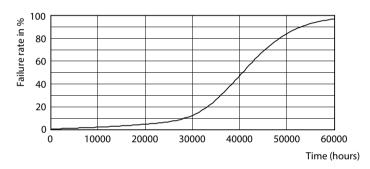

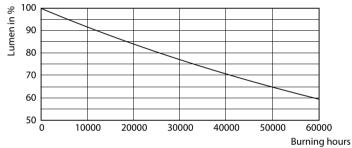

Life Expectancy Diagram

Lumen Maintenance Diagram - MAS LED ExpertColor 6.7-35W MR16 930 24D



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.