


# BRICK duo

## 581634.004.1 | Wall luminaires



Wall luminaires  
4051859113850  
L 240, B 120, H 24

Wall (surface)  
silver, matt (approx. RAL 9006)

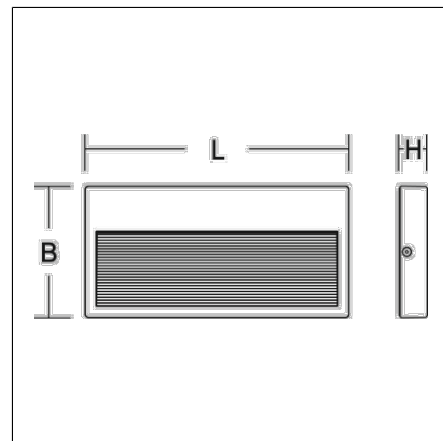

Flat surface-mounted LED fitting for illumination of wall related areas such as stairs, ramps or corridors. Housing made of corrosion-resistant die-cast aluminium, powder-coated. Stainless steel screws. Diffuser with clear toughened glass. Asymmetrical downward light distribution for wide dispersion and uniform illumination. With compensation for drill hole deviations. Driver integrated. With connecting terminal up to 1 x 3 x 1.5 mm<sup>2</sup>, for max. 13 mm diameter mains cable.

### Product specifications

Length L	240 mm
Width B	120 mm
Height H	24 mm
Weight	710 g
Light source	LED
Colour temperature	4000 K
Rated luminous flux	180 lm
System power	10 W
System efficiency	18 lm/W
Glare evaluation UGR (4H 8H)	30,2
Beam angle	44°/90°/0°/90°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	200 - 240 V / 50 Hz
Luminaires on B10A fuse	20
Luminaires on B16A fuse	30
Inrush current / Inrush current duration	25.6 A / 3 µs
CIE Flux Code / CEN Flux Code	49 80 95 96 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK09
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE, EAC, UKCA