
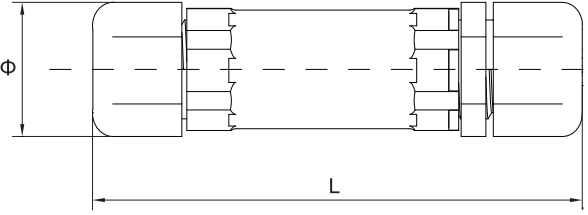


IP68 Connector

Item Code	kg
543098021900	0.039kg
543098022000	0.056kg


Description	Φ(mm)	L (mm)
OP-IP68 3wires connector	27	110
OP-IP68 5wires connector	30	120

Working temperature: -40~+85°C
Rated Voltage: ≤ 250V
Rated Current: ≤ 16A


OP-IP68 3wires connector

①

INPUT WIRE SIDE

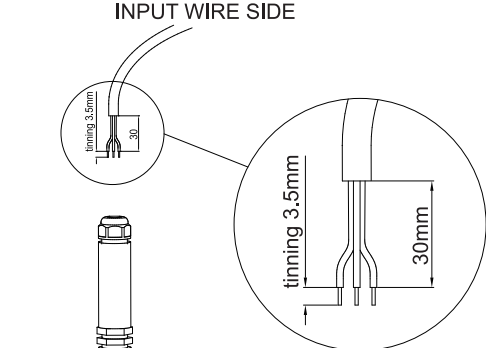

Connect wires




min. Φ7mm max. Φ10mm
Cable: 3×1.0~1.5mm²
OP-IP68 3wires connector

FIXTURE SIDE

②

INPUT WIRE SIDE

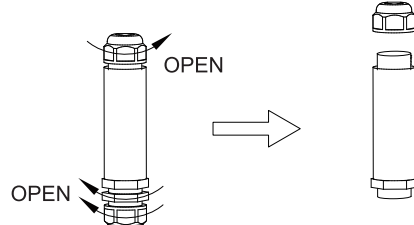


OPEN

OPEN

FIXTURE SIDE

③

INPUT WIRE SIDE

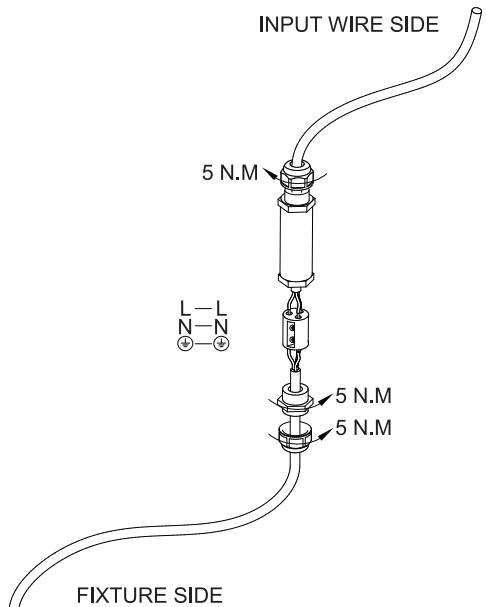

5 N.M


L - L
N - N
PE - PE

5 N.M
5 N.M

FIXTURE SIDE



④

INPUT WIRE SIDE

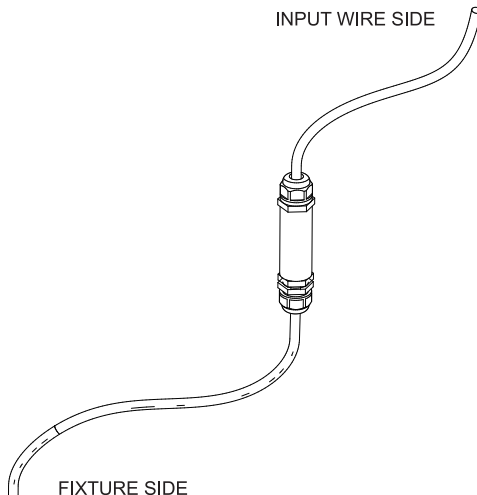

FIXTURE SIDE

OP-IP68 5wires connector

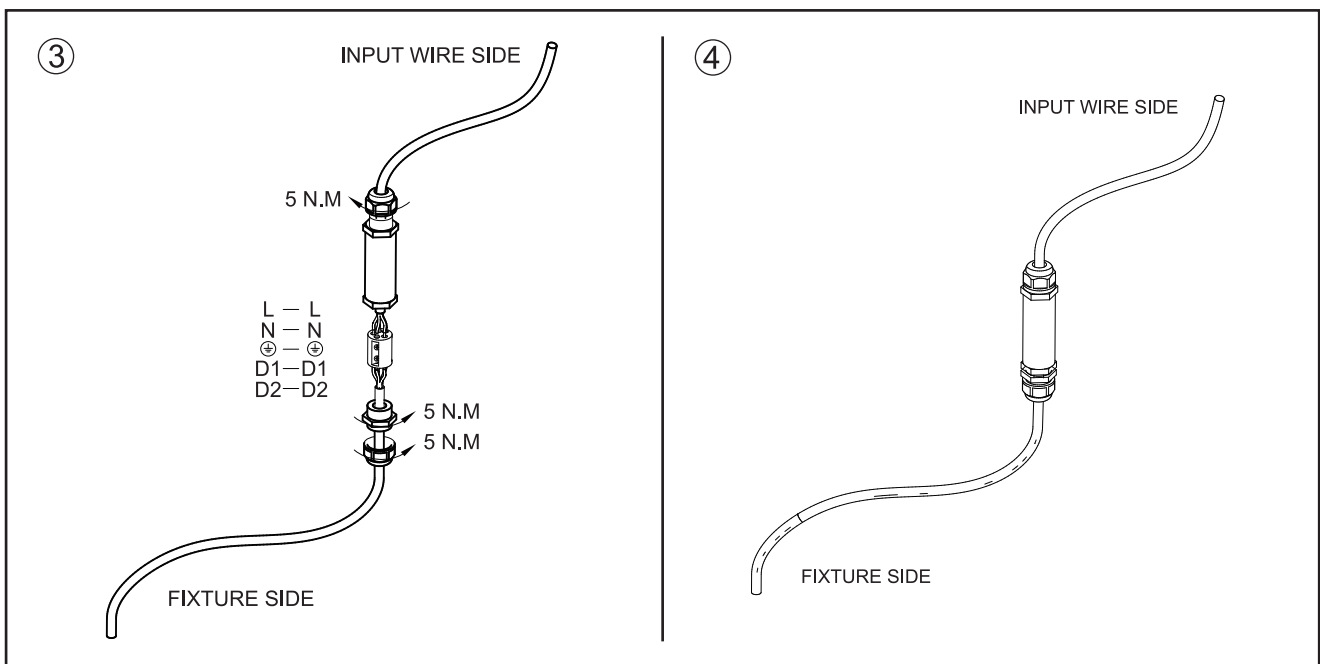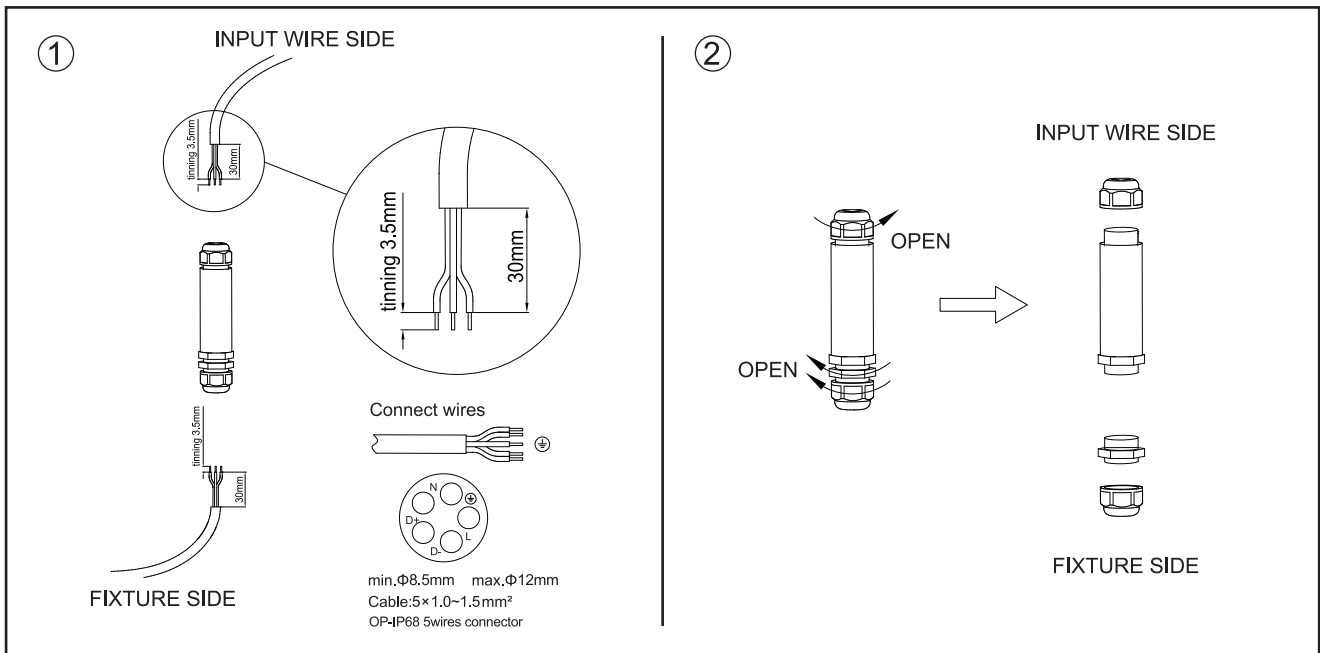

Data subject to change
Les données sont sujettes à modifications
Änderungen vorbehalten

Suzhou Opplé Lighting Co., Ltd.
215200
East Side, Fenyang Road,
Fenhu Economic Development Zone,
Wujiang City, Jiangsu Province,
P.R.China

OPPLE Lighting B.V.
Materiaalweg 6-6A
5681 RJ Best
The Netherlands
service@opple.com
www.opple.com