




- Modern die-cast aluminium street light suitable for residential and commercial applications
- Die-cast aluminium construction for optimal heat dissipation and performance
- UV stabilized polycarbonate cover
- Toolless gear tray removal for ease of maintenance
- Built in anti-tamper isolation facility
- Compatible with post top or side entry utility 76mm spigot
- G3 Glare Rating
- Surge protection
- Available in standard, complete with photocell option

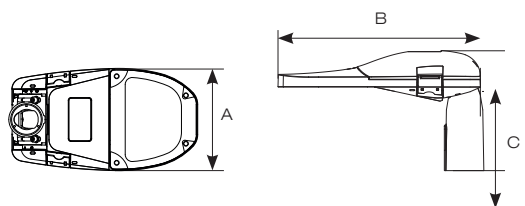

Adjustable 48-60mm Spigot bracket

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
100/240V	50Hz	-20 to 50°C	L70 50,000	Ra 70	5	120°x70°	1	IP66	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	WINDAGE	TRADE
AONIXLED/1		14W		2000lm		0.04	£405.00
AONIXLED/2	Cool White	27W	4000K	4000lm	150lm	0.04	£453.00
AONIXLED/3		41W		6200lm		0.07	£580.00
AONIXLED/4		55W		8200lm		0.07	£661.00

CODE (OPTIONS)	DESCRIPTION	TRADE
/PC	Electronic Photocell	+ £36.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AONIXLED/SBA	48-60mm Spigot Bracket	£23.85
AONIXLED/WB	Wall Bracket	£30.55

