


Unity 150 Downlight



- IP44 compact high performance architectural downlight suitable for commercial, hospitality and retail applications
- Die-cast aluminium construction, powder coated and 30° cut-off angle
- Mirror finished anodized reflector
- Anti-glare design to create visual comfort
- Remote driver with plug and play connection
- Dimmable and emergency options
- Powered by Tridonic

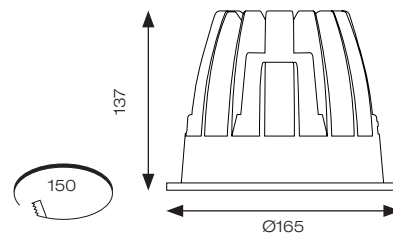

Architectural
Downlight



OCTO
Option
Available

Powered by
CASAMBI



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50/60Hz	-20°C to 25°C	L70 50,000	Ra 90	3	70°	2	IP44

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LMW	UGR	TRADE
AULED150D	Cool White	37W	4000K	3254lm	88lm	22	£96.50
AULED150D/WW	Warm White	37W	3000K	2870lm	78lm	22	£96.50

*UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £90.00	/OCTO	OCTO Smart Control	+ £155.00
/SM3	Self-Test Emergency	+ £121.00	/DD	Digital Dimming (DD1/DD3/DD4)	+ £95.00
/DM3	DALI Emergency	+ £205.00			