


Endurance TPa UGR<19 1200x600 Panel



- LED panel suitable for education, commercial and ancillary area applications
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- Cool white, warm white and daylight options
- White anodised aluminium frame for visual compatibility with ceiling grid
- Low glare and even light distribution for multiple applications
- Surface mounting frame option
- Powered by Tridonic
- TPa as standard
- Self-Test Panel Pod and Sensor Pod compatible (see p522 for more information)

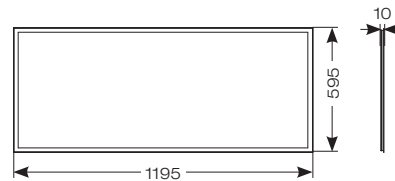

Panel Pod
Emergency installed



OCTO
Option
Available

Powered by
CASAMBI



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220-240V	50-60Hz	-20 to 40°C	L80 50,000	Ra 80	6	80°	2	IP20

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LMW	UGR	TRADE
AERMLED3/120/CW	1200x600 - Cool White	60W	4000K	5800lm	97lm	17	£305.00
AERMLED3/120/WW	1200x600 - Warm White	60W	3000K	5400lm	90lm	17	£305.00
AERMLED3/120/DL	1200x600 - Daylight	60W	6000K	5400lm	90lm	17	£305.00

AIRMLED/POD/3NM/ST	Emergency Pod	5W					£112.00
AIRMLED/POD/MWS	Sensor Pod	1W					£73.00

* UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION	TRADE
/OCTO	OCTO Smart Control	+ £195.00
/DD	Digital Dimming (DD1/DD3/DD4)	+ £95.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AERMLED/120/SMF	1200x600 Surface Mounting Frame	£61.50
APRK/120	1200x600 Plasterboard Recessed Kit	£101.00