


FLAT BASIC

211059.002 | Ceiling and wall luminaires



Ceiling and wall luminaires
4010319218412
D 370, H 118

Ceiling mounting, Wall (surface)
pure white (RAL 9010)

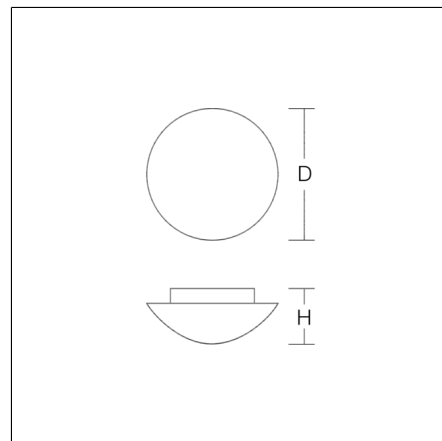


Decorative round surface-mounted luminaire. Base: plastic. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Diffuser fastening: spring system. Triplex glass produces particularly homogeneous, soft and glare free lighting. Suitable for Ceiling mounting, Wall (surface).

Product specifications

Diameter D	370 mm
Height H	118 mm
Weight	2.53 kg
Light source	2 x A60 max. 60 W, E27
Rated luminous flux	890 lm
System power	92 W
System efficiency	10 lm/W
Glare evaluation UGR (4H 8H)	15,5
Beam angle	down 118° up 180°
Driver	Not necessary
Control	on/off
Voltage	0 - 250 V / 0 - 60 Hz
CIE Flux Code / CEN Flux Code	41 71 89 80 64
Type of protection	IP 43 ceiling mounting IP 44 wall mounting
Protection class	II
Filament test	960°C - 30 seconds
Impact resistance	IK02
Ambient temperature	25 °C
Conformity mark	CE, EAC, UKCA

Spareparts



05-211059.002
Replacement glass