

SCATOLLO

SLI003037CCT_PW



See
more

LED luminaire SCATOLLO with the possibility of changing the light color (CCT), with a power of 8 W, high light efficacy 125 lm/W. Thanks to the ability to change the color temperature (CCT) in the range from 3000K to 6000K, we can adjust the light color depending on our needs and preferences. It has a high IP54 rating, making it ideal for use in rooms with high humidity. The CCT function allows you to changes to the colour temperature of light (3000/4000/6000K). Designed for surface mounting.

CCT


IP54



| | | | |
|---------------------------|-----------------------|--------------------|-------------------------|
| Power | 8 W | Voltage | 230 V |
| Luminous flux* | 1000 lm (360°) | Colour temperature | 3000/4000/6000 K |
| Colour of light | CCT | Beam angle | 180 ° |
| Degree of protection (IP) | IP54 | | |


Technical data

| | |
|---------------------------|--|
| Code | SLI003037CCT_PW |
| Power | 8 W |
| Nominal current | 55 mA |
| Voltage | 230 V |
| Energy consumption | 8 kWh/1000h |
| Frequency | 50HZ Hz |
| Protection class | II |
| Power factor | 0,5 |
| Useful luminous flux* | 1000 lm (360°) |
| Luminous flux** | 800 lm (360°) |
| Lamp efficacy | 125 lm/W |
| Colour temperature | 3000/4000/6000 K |
| Colour of light | CCT |
| Beam angle | 180 ° |
| RA | 80 |
| Light source included | + |
| Dimmable | No |
| Working temperature range | -20/+40 ° |
| Lifespan | 17000 h |
| Housing material | PLASTIC |
| Degree of protection (IP) | IP54 |
| Colour | White |
| Dimension (AxBxC) | 200x100x75 mm |
| For use | Inside/Outside |
| Assembly method | On the ceiling |
| Application | INT/EXT |
| Made in | PRC |
| Other | Light color change function 3000K/4000K/6000K , |

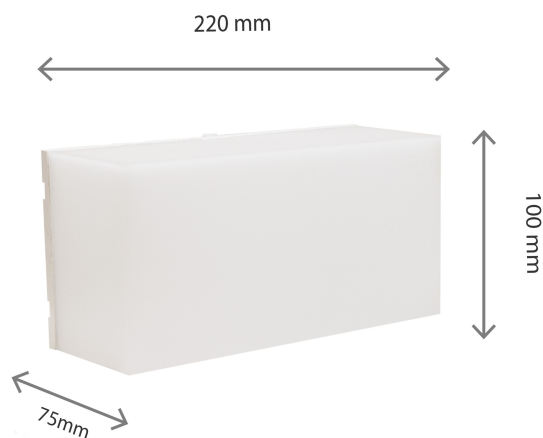

Related documents



 User manual



 Declaration of Conformity



 Photometric file

