



CorePro LED PLC 4.5W 830 2P G24d-1

CorePro LED PLC 2P integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamping in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environmentally friendly.

Product data

| General Information | | |
|--|--------------------|--|
| Cap-Base | G24D-1 [G24d-1] | |
| Nominal lifetime | 30,000 hour(s) | |
| Switching Cycle | 50,000 | |
| Lighting Technology | LED | |
| Flux measurement reference | Sphere | |
| | | |
| Light Technical | | |
| Color Code | 830 [CCT of 3000K] | |
| Beam Angle (Nom) | 120 degree(s) | |
| Luminous Flux | 475 lumen | |
| Color Designation | White (WH) | |
| Correlated Color Temperature (Nom) | 3000 K | |
| Luminous Efficacy (rated) (Nom) | 105.00 lm/W | |
| Color Consistency | <6 | |
| Color rendering index (CRI) | 83 | |
| LLMF At End Of Nominal Lifetime (Nom) 70 % | | |
| | | |
| Operating and Electrical | | |
| Line Frequency | 50 to 60 Hz | |
| Input Frequency | 50 to 60 Hz | |
| Power Consumption | 4.5 W | |
| Starting Time (Nom) | 0.5 s | |


| Warm-up time to 60% light | 0.5 s |
|-------------------------------|--|
| Power Factor (Fraction) | 0.9 |
| Voltage (Nom) | 220-240 V |
| | |
| Temperature | |
| Ambient temperature range | -20 °C to 35 °C |
| T-Case Maximum (Nom) | 60 ℃ |
| | |
| Controls and Dimming | |
| Dimmable | No |
| | |
| Mechanical and Housing | |
| Bulb Material | Plastic |
| Product Length | 100 mm |
| Bulb Shape | Tube, single-ended |
| | |
| Approval and Application | |
| Energy Saving Product | Yes |
| Approval Marks | TUV CE marking RoHS compliance KEMA Keur |
| | certificate |
| Energy Consumption kWh/1000 h | 5 kWh |
| EPREL Registration Number | 403,560 |
| CE mark | Yes |
| | |

Datasheet, 2023, May 22 data subject to change

| EU RoHS compliant | Yes |
|-------------------------------|------------------------------------|
| | |
| Product Data | |
| Full product code | 871869670659600 |
| Order product name | CorePro LED PLC 4.5W 830 2P G24d-1 |
| Order code | 929001350702 |
| Numerator - Quantity Per Pack | 1 |


| Numerator - Packs per outer box | 10 |
|---------------------------------|------------------------------------|
| Material number (12NC) | 929001350702 |
| Full product name | CorePro LED PLC 4.5W 830 2P G24d-1 |
| EAN/UPC - Case | 8718696706602 |

Dimensional drawing




Product D1 D2 A1 A2 A3 CorePro LED PLC 4.5W 830 2P G24d-1 24.3 mm 28.4 mm 95.8 mm 115 mm 137.6 mm


Photometric data





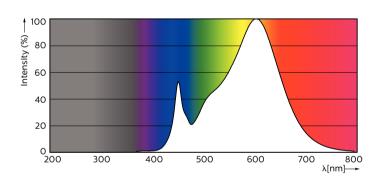



Spectral Power Distribution Colour




Light Distribution Diagram

Lifetime

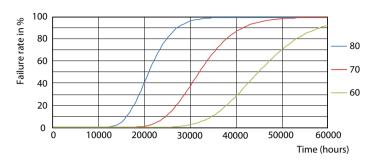





Life Expectancy Diagram

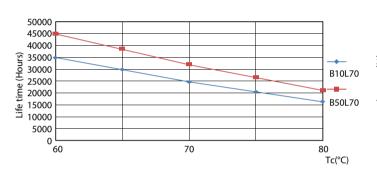

Life Expectancy Diagram - CorePro LED PLC 4.5W 830 2P G24d-1

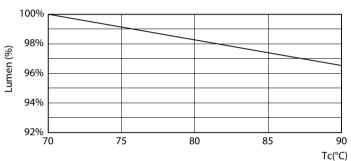

Life Expectancy Diagram

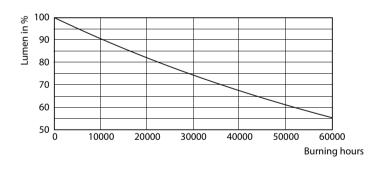

Lumen Maintenance Diagram

Lumen Maintenance Diagram - CorePro LED PLC 4.5W 830 2P G24d-1



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.