


# Brock Wall Light



- Modern bi-directional wall light providing vivid angled light distribution suitable for residential and hospitality applications
- Die-cast aluminium body with a graphite powder coated anodized paint finish for enhanced durability
- Non-dimmable

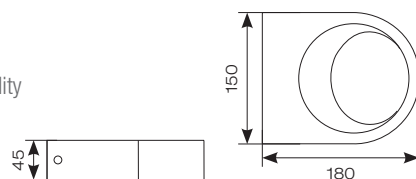

Matching Brock LED Bollard see p366



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-20°C to 25°C	L70 50,000	Ra 80	3	50°	2	IP65	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ABRLED/WL/CW	Cool White	7.7W	4000K	452lm	57lm	£134.00
ABRLED/WL/WW	Warm White	7.7W	3000K	448lm	56lm	£134.00