



HD4185



HD4128



HD4127

### 1. USE

Socket outlets : American and universal standards.

### 2. RANGE

UNIVERSAL STANDARD	Cat. No.
2 P 16 A 127/250 Vac socket - unshielded tulip contacts 1 module	<input type="checkbox"/> HD4125S <input type="checkbox"/> HC4125S <input type="checkbox"/> HS4125S
2 P 16 A 127/250 Vac socket - Ø 5 mm shielded tulip contacts - 1 module	<input type="checkbox"/> HD4125 <input type="checkbox"/> HC4125 <input type="checkbox"/> HS4125
2 P+E 16 A 127/250 Vac universal socket Ø 5 mm unshielded tulip contacts - 2 modules	<input type="checkbox"/> HD4126S <input type="checkbox"/> HC4126S <input type="checkbox"/> HS4126S
2 P+E 16 A 127/250 Vac universal duplex socket Ø 5 mm unshielded tulip contacts - 3 modules	<input type="checkbox"/> HD4126 <input type="checkbox"/> HC4126 <input type="checkbox"/> HS4126
2 P+E 16 A 127/250 Vac universal duplex socket unshielded tulip contacts - 3 modules	<input type="checkbox"/> HD4185S <input type="checkbox"/> HC4185S <input type="checkbox"/> HS4185S
2 P+E 16 A 127/250 Vac universal duplex socket shielded tulip contacts - 3 modules	<input type="checkbox"/> HD4185 <input type="checkbox"/> HC4185 <input type="checkbox"/> HS4185

### AMERICAN STANDARD

2 P 15 A 127/250 Vac socket - unshielded tulip contacts 1 module	<input type="checkbox"/> HD4127S <input type="checkbox"/> HC4127S <input type="checkbox"/> HS4127S
2 P 15 A 127/250 Vac socket - shielded tulip contacts 1 module	<input type="checkbox"/> HD4127 <input type="checkbox"/> HC4127 <input type="checkbox"/> HS4127
2 P+E 15 A 127/250 Vac socket unshielded tulip contacts - 1 module	<input type="checkbox"/> HD4129S <input type="checkbox"/> HC4129S <input type="checkbox"/> HS4129S


### 2. RANGE (continued)

AMERICAN STANDARD	Cat. No.
2 P+E 15 A 127/250 Vac socket unshielded tulip contacts - 2 modules	<input type="checkbox"/> HD4128S <input type="checkbox"/> HC4128S <input type="checkbox"/> HS4128S
2 P+E 15 A 127/250 Vac socket - shielded tulip contacts 2 modules	<input type="checkbox"/> HD4128 <input type="checkbox"/> HC4128 <input type="checkbox"/> HS4128
2 P+E 15 A 127/250 Vac universal duplex socket unshielded tulip contacts - 3 modules	<input type="checkbox"/> HD4188S <input type="checkbox"/> HC4188S <input type="checkbox"/> HS4188S
2 P+E 15 A 127/250 Vac universal duplex socket shielded tulip contacts - 3 modules	<input type="checkbox"/> HD4188 <input type="checkbox"/> HC4188 <input type="checkbox"/> HS4188
2 P+E 15 A 127/250 Vac GFCI socket - 3 modules	<input type="checkbox"/> HD4188GF <input type="checkbox"/> HC4188GF <input type="checkbox"/> HS4188GF

#### Color code:

- White
- Tech
- Anthracite

### 3. OVERALL DIMENSIONS (mm)

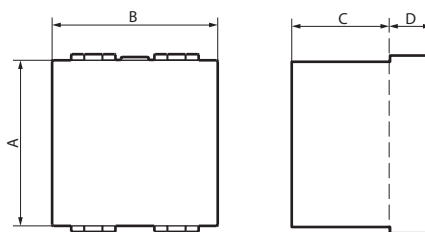

	A	B	C*	D*
1 module	22.5	45	26	9.5
2 modules	45	45	26	9.5
3 modules	68	45	26	9.5
HD/HC/HS4188GF	68	45	29.5	11.2

\*Average overall dimensions depending of the standard.

#### 4. CONNECTION

**Screw clamps:**

Stripping length, rigid or flexible cables: 9 mm

#### 5. TECHNICAL CHARACTERISTICS

**■ 5.1 Protection index**

Penetration by solid bodies/liquid: IP 21 D

Impact test: IK 04

**■ 5.2 Material characteristics**

Material: Polycarbonate

Colour: Anthracite, White, Tech

Halogen free.

UV resistant.

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.

+ 650° C / 30 s for other parts made of insulating materials.

**■ 5.3 Electrical characteristics**

Voltage: 127/250 VAC

Current: 15/16 A

**■ 5.4 Climatic characteristics**

Storage and operating temperatures: - 5° C to + 35° C

#### 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

#### 7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.

Refer to e.catalogue.