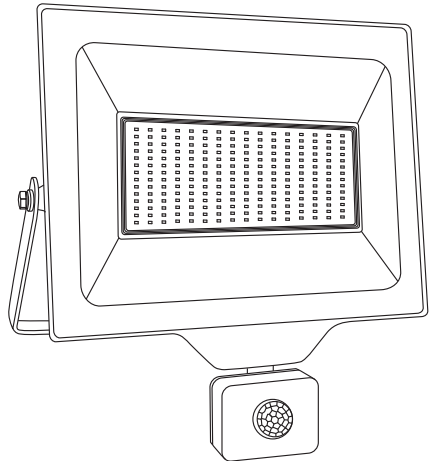
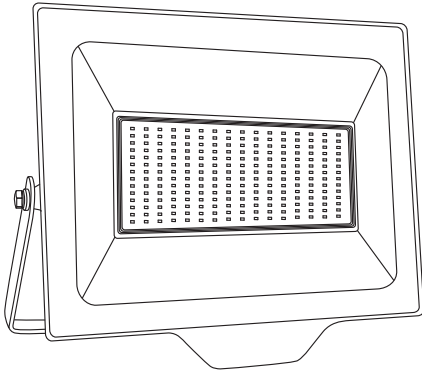


---

**FLOODLIGHT ESSENTIAL**


---


**IP65**
**IP44**

4058075831476


4058075831490










4058075831513

4058075831599


4058075831612

4058075831636

	EAN	W	lm Light Source	lm Output	K	Temp (°C)	V~	mA	Hz	DF	▽ (°)	
<b>FL ESSENTIAL 100W 840 BK</b>	4058075831476	100	11500	10000	4000	-20...+40	220- 240	450	50/60	>0.9	110	12500
<b>FL ESSENTIAL 150W 840 BK</b>	4058075831490	150	17000	15000	4000	-20...+40	220- 240	675	50/60	>0.9	110	12500
<b>FL ESSENTIAL 200W 840 BK</b>	4058075831513	200	22500	20000	4000	-20...+40	220- 240	900	50/60	>0.9	110	12500
<b>FL ESSENTIAL SENSOR 100W 840 BK</b>	4058075831599	100	11500	10000	4000	-20...+40	220- 240	450	50/60	>0.9	110	12500
<b>FL ESSENTIAL SENSOR 150W 840 BK</b>	4058075831612	150	17000	15000	4000	-20...+40	220- 240	675	50/60	>0.9	110	12500
<b>FL ESSENTIAL SENSOR 200W 840 BK</b>	4058075831636	200	22500	20000	4000	-20...+40	220- 240	900	50/60	>0.9	110	12500



1x		 <b>1000 g</b> 4058075831476	 <b>1540 g</b> 4058075831490
		 <b>2160 g</b> 4058075831513	
1x		 <b>1040 g</b> 4058075831599	 <b>1580 g</b> 4058075831612
	1x 	 <b>2170 g</b> 4058075831636	

mm

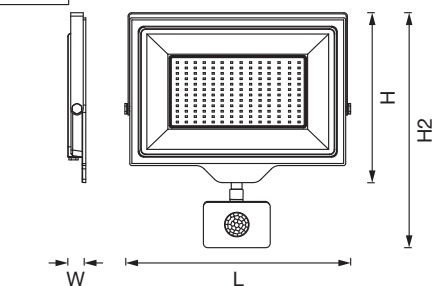

	L	W	H	L	W	H2
4058075831476	270	30	222	4058075831599	270	45
4058075831490	337	31	263	4058075831612	337	45
4058075831513	402	31	291	4058075831636	402	45

**1**





ON  
OFF

ON ON ON  
OFF OFF OFF




↑ ON  
↓ OFF

**2**

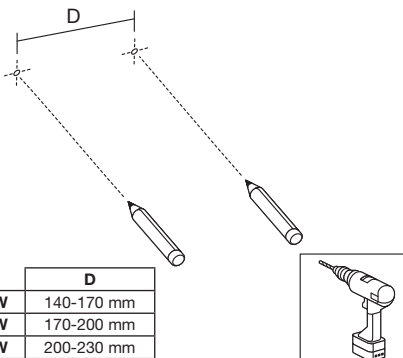


	D
100W	140-170 mm
150W	170-200 mm
200W	200-230 mm

**3**

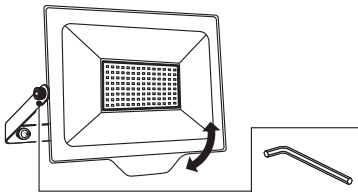**4**

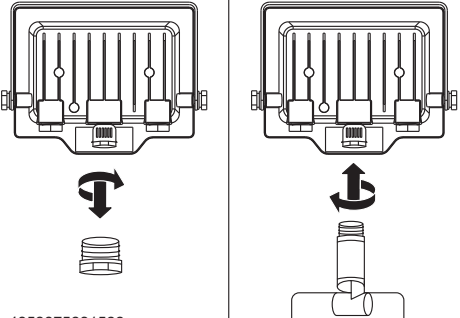

4058075831599  
4058075831612  
4058075831636

TIME SENS LUX

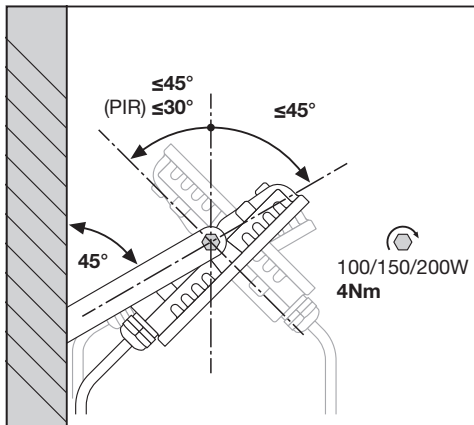
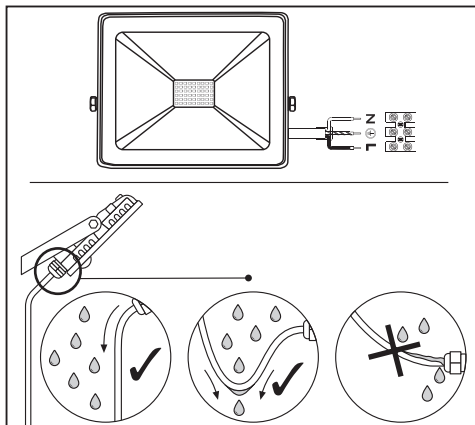


Diagram showing dimensions A, B, and C. Below is a table of specifications for 230V~:

230V~		
C10A	B16A	C16A
21	29	34
14	19	23
10	14	17

mm	A	B	C			
<b>100W</b>	170	140	6	2x M8	0.0368 m <sup>2</sup>	
<b>150W</b>	200	170	8	2x M8	0.0546 m <sup>2</sup>	
<b>200W</b>	230	200	8	2x M8	0.0748 m <sup>2</sup>	



**FLOODLIGHT ESSENTIAL SENSOR**

Diagram showing the floodlight's sensor features and a table of specifications for 230V~:

- Time delay: 10s-10min
- ON/OFF control
- Sensors: TIME, SENS, LUX
- Light level: 5-500Lux
- Range: 6m +-2m
- Beam angle: 120°
- Range: 6m +-2m

230V~		
C10A	B16A	C16A
21	29	34
14	19	23
10	14	17

4058075831599  
4058075831612  
4058075831636

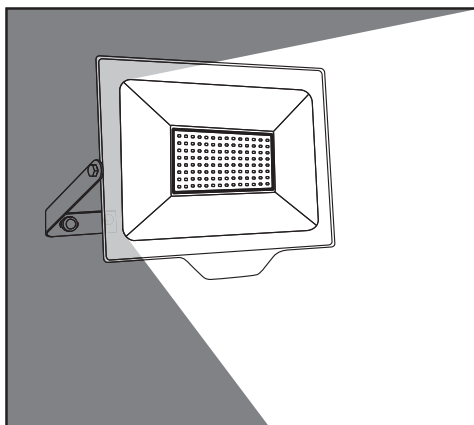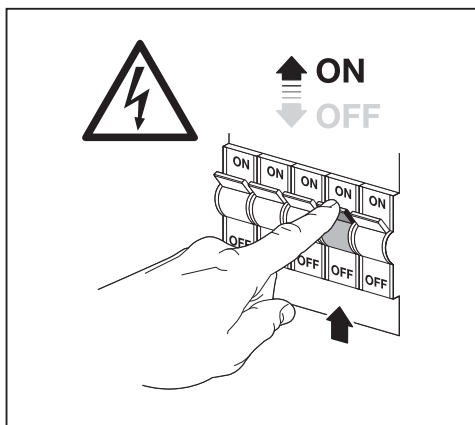



	EAN	n	LED	QR code	ENERGY * X =
FL ESSENTIAL 100W 840 BK	4058075831476	1	AC53047		E
FL ESSENTIAL 150W 840 BK	4058075831490	1	AC53048		E
FL ESSENTIAL 200W 840 BK	4058075831513	1	AC53049		E
FL ESSENTIAL SENSOR 100W 840 BK	4058075831599	1	AC53050		E
FL ESSENTIAL SENSOR 150W 840 BK	4058075831612	1	AC53051		E
FL ESSENTIAL SENSOR 200W 840 BK	4058075831636	1	AC53052		E



Points de collecte sur [www.quefairedemesdechets.fr](http://www.quefairedemesdechets.fr)

C10449057  
G11169913  
29.06.2023



LEDVANCE GmbH  
Steinerne Furt 62  
86167 Augsburg, Germany  
[www.ledvance.com](http://www.ledvance.com)