
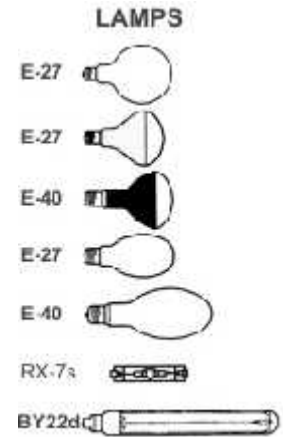


## ELECTRONIC IGNITORS FOR DISCHARGE LAMPS 600-1000W

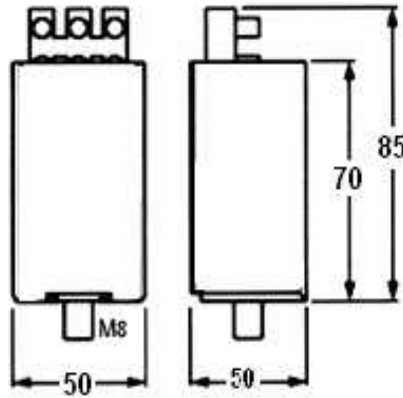

<u>TECHNICAL DATA</u>	<u>IGNITER 1000W</u>	<u>LAMPS</u>
Approved mains voltage [V]	198...264	
Approved mains frequency [Hz]	50/60	
Max. continuous lamp current [A]	12	HI 400-1000W
Connecting terminal [mm <sup>2</sup> ]	2.5	HS 600-1000W
Response / cut out voltage [V]	98 / 170	
Ignition voltage [kV]	4,0...5,0	
Timer ignition time [s]		
Phase position [°el]	60...90/240...270	
Pulses per cycle	60	
Approved load capacity [pF]	20...100	
Internal losses at 25°C ambient temperature [W]	<6,0 (12A)	
Temperature rise at 25°C ambient temperature [K]	<35 (12A)	
Max. housing temperature [°C]	105	
Approved ambient temp. t(u) [°C]	-30...+55	
Weight [kg]	0.35	