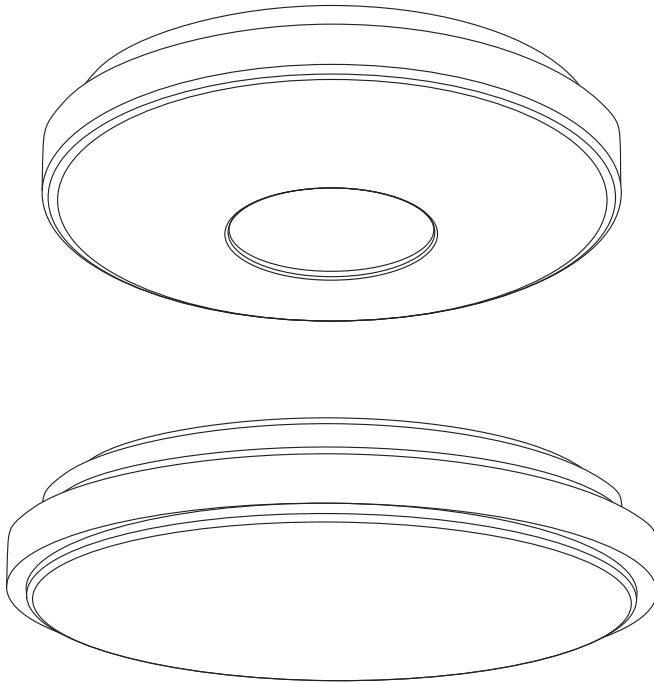
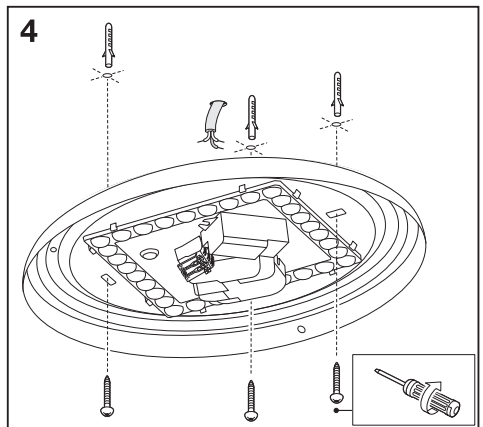
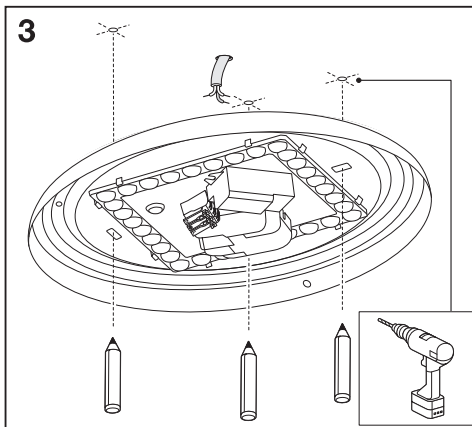
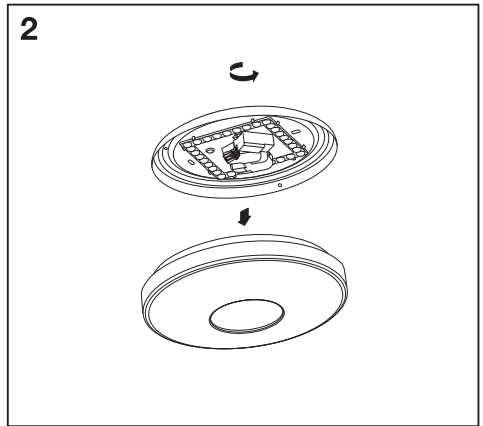
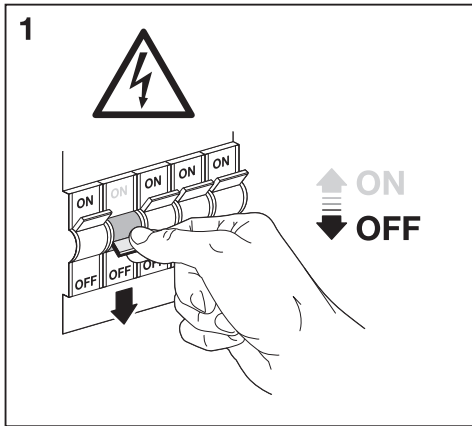
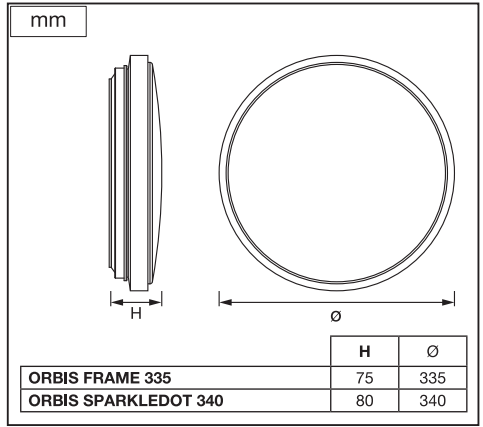
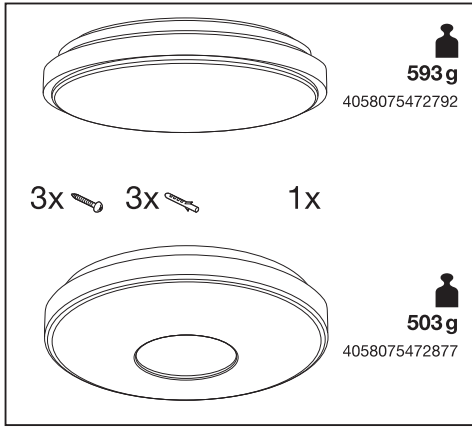
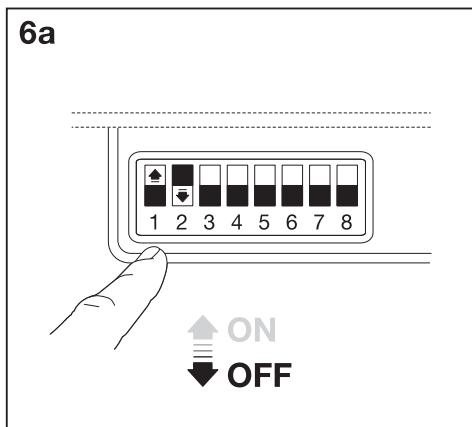
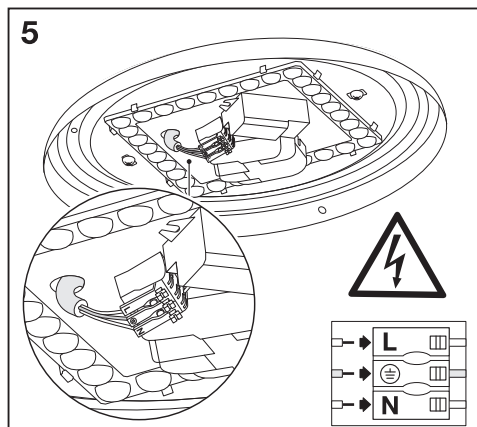

ORBIS®



	EAN	W	lm Light Source	lm Output	K	🌡️ (°C)	V~	mA	Hz	PF	▽ (°)	👉
ORBIS FRAME 335 RD 24W 830 CLICKSEN	4058075472792	24	2900	1320	3000	-20...+40	220-240	130	50/60	0.7	120	15000
ORBIS SPARKLEDOT340 24W830 CLICKSEN	4058075472877	24	2900	1680	3000	-20...+40	220-240	130	50/60	0.7	120	15000





6b Detection area

1	2	
ON	ON	100%
ON	-	75%
-	ON	50%
-	-	25%

Hold time

3	4	5	
ON	ON	ON	5s
ON	ON	-	30s
ON	-	ON	1min
ON	-	-	3min
-	ON	ON	5min
-	ON	-	10min
-	-	ON	20min
-	-	-	30min

Daylight sensor

6	7	8	
ON	ON	ON	2Lux
ON	ON	-	10Lux
-	ON	-	25Lux
ON	-	-	50Lux
-	-	-	Disable

2 MODE: SENSOR MODE / CONVENTIONAL LIGHT MODE

SENSOR MODE

CONVENTIONAL LIGHT MODE

2X OFF/ON

AUTO CHECKING

Conventional light mode

Sensor mode

10 seconds

OK

