

# TORRE RING CCT

SLI003025CCT\_PW

See  
more

LED luminaire TORRE RING CCT with the possibility of changing the light color (CCT), with a power of 9 W, high light efficacy 111 lm/W. Thanks to the ability to change the color temperature (CCT) in the range from 3000K to 6000K, we can adjust the light color depending on our needs and preferences. It has a high IP54 rating, making it ideal for use in rooms with high humidity. The CCT function allows you to changes to the colour temperature of light (3000/4000/6000K). Narrow beam angle 30° gives directional light so that selected surfaces can be better exposed. Designed for surface mounting.

CCT


IP54



Power	<b>9 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>1000 lm (360°)</b>	Colour temperature	<b>3000/4000/6000 K</b>
Colour of light	<b>CCT</b>	Beam angle	<b>30 °</b>
Degree of protection (IP)	<b>IP54</b>		

## Technical data

Code	SLI003025CCT_PW
Power	9 W
Nominal current	65 mA
Voltage	230 V
Energy consumption	9 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0,5
Useful luminous flux*	1000 lm (360°)
Luminous flux**	700 lm (360°)
Lamp efficacy	111 lm/W
Colour temperature	3000/4000/6000 K
Colour of light	CCT
Beam angle	30 °
RA	80
Light source included	+
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Plastic
Degree of protection (IP)	IP54
Colour	Black
Dimension (AxBxC)	99x78x156 mm
For use	Inside/Outside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC
Other	Light color change function 3000K/4000K/6000K ,

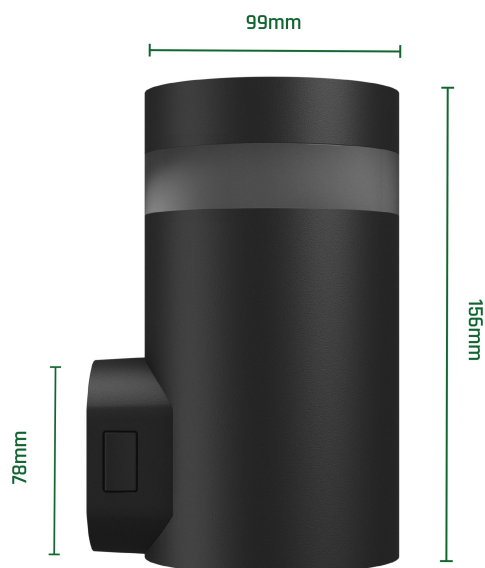

## Related documents

[User manual](#)[Declaration of Conformity](#)[Photometric file](#)

