

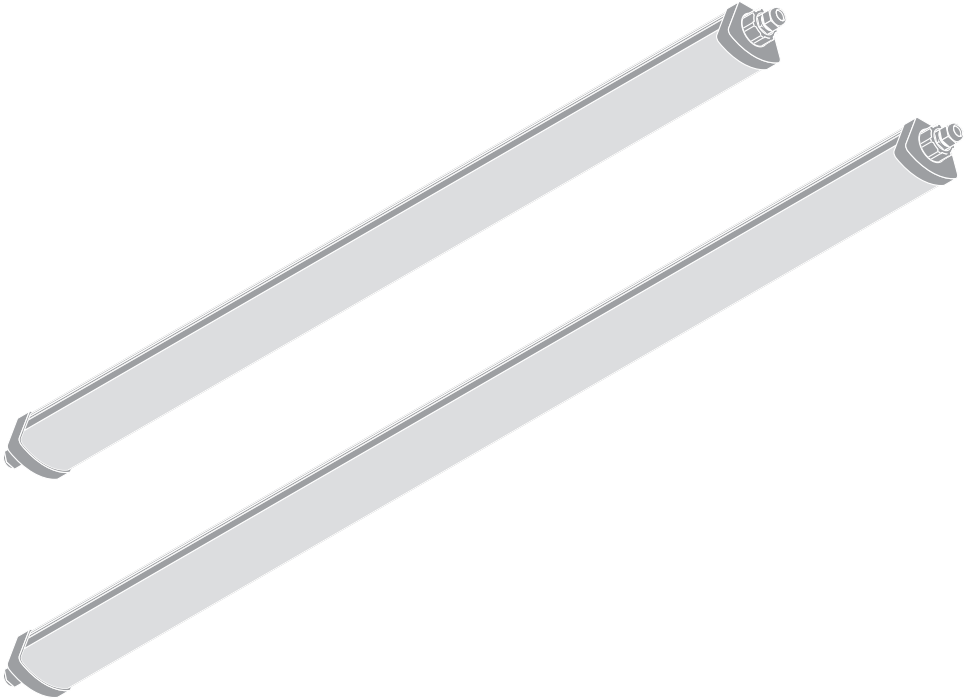
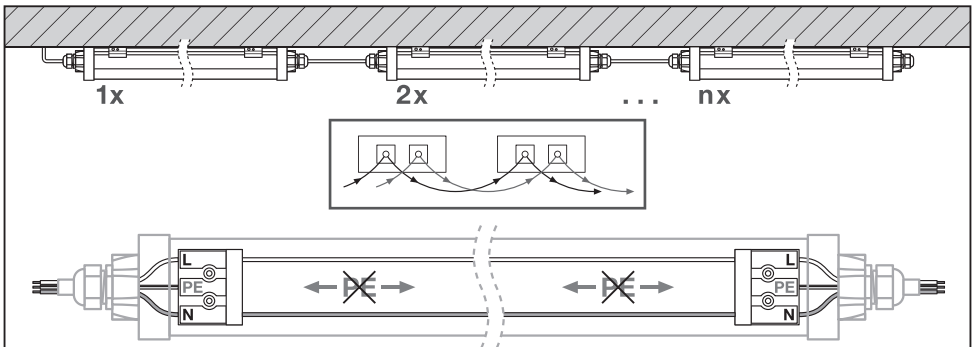
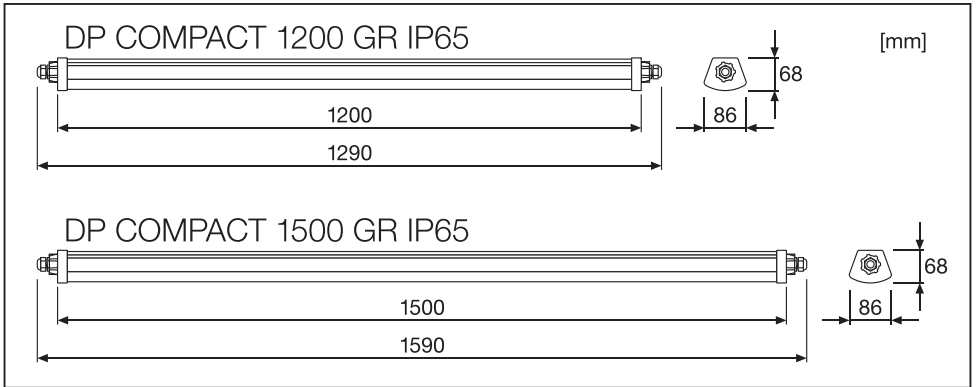


## DAMPPROOF COMPACT







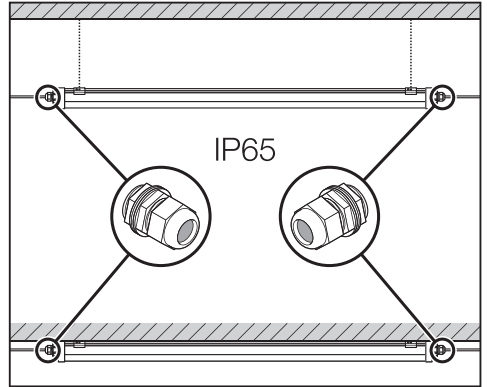








	EAN	l x w x h [mm]	W	lm	lm/W	K	IP	IK
DP COMPACT 1200 23W/4000K GR IP65	4058075062085	1290 x 86 x 68	23	2800	120	4000K	65	08
DP COMPACT 1200 44W/4000K GR IP65	4058075062108	1290 x 86 x 68	44	5400	120	4000K	65	08
DP COMPACT 1200 44W/6500K GR IP65	4058075062122	1290 x 86 x 68	44	5400	120	6500K	65	08
DP COMPACT 1500 31W/4000K GR IP65	4058075062146	1590 x 86 x 68	31	3800	120	4000K	65	08
DP COMPACT 1500 55W/4000K GR IP65	4058075062160	1590 x 86 x 68	55	6700	120	4000K	65	08
DP COMPACT 1500 55W/6500K GR IP65	4058075062184	1590 x 86 x 68	55	6700	120	6500K	65	08

	EAN	V <sub>AC</sub>	Hz	∠	PF	R <sub>a</sub>	👤
DP COMPACT 1200 23W/4000K GR IP65	4058075062085	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.1 kg
DP COMPACT 1200 44W/4000K GR IP65	4058075062108	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.2 kg
DP COMPACT 1200 44W/6500K GR IP65	4058075062122	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.2 kg
DP COMPACT 1500 31W/4000K GR IP65	4058075062146	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.4 kg
DP COMPACT 1500 55W/4000K GR IP65	4058075062160	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.4 kg
DP COMPACT 1500 55W/6500K GR IP65	4058075062184	220-240V	50/60 Hz	120°	≥ 0.9	≥ 80	1.4 kg

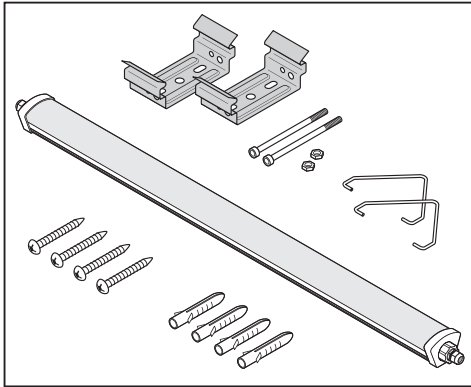

n	B10	B16	C10	C16
DP COMPACT 1200 GR IP65	20	20	20	20
DP COMPACT 1500 GR IP65	16	16	16	16

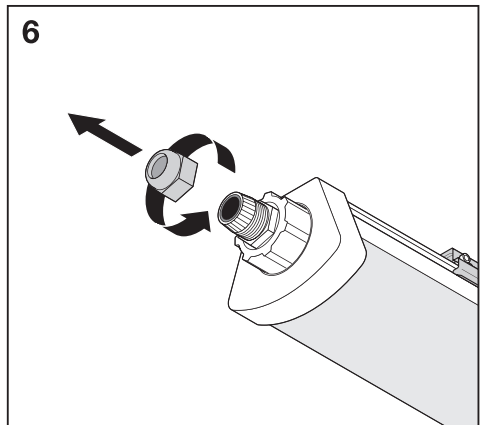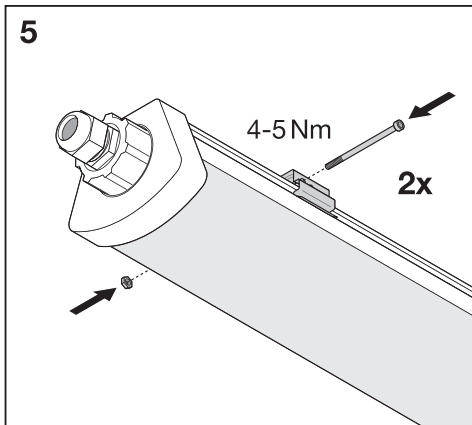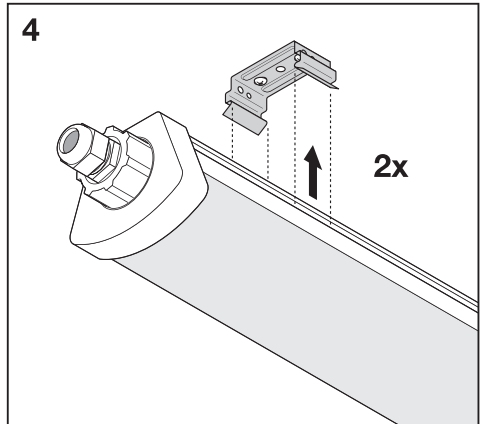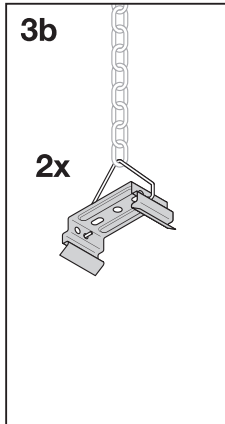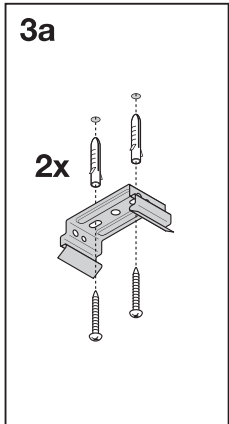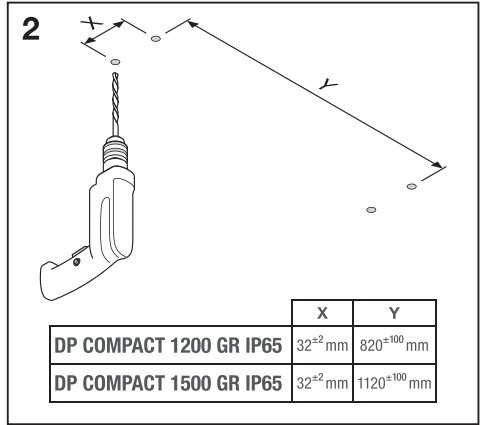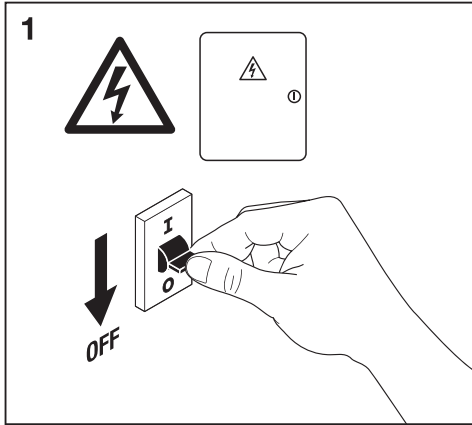

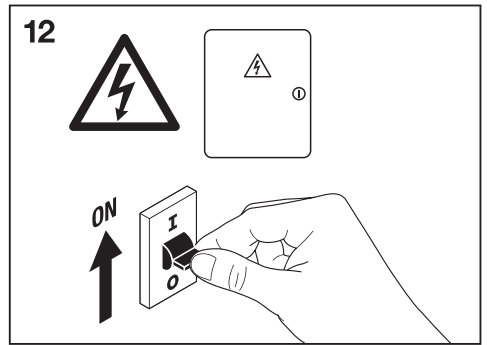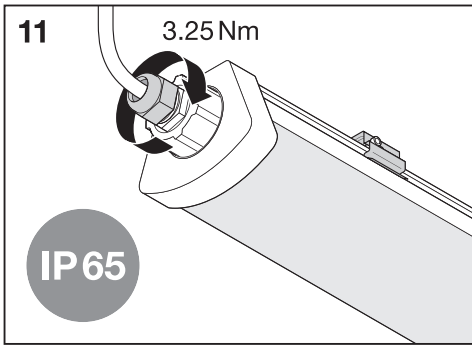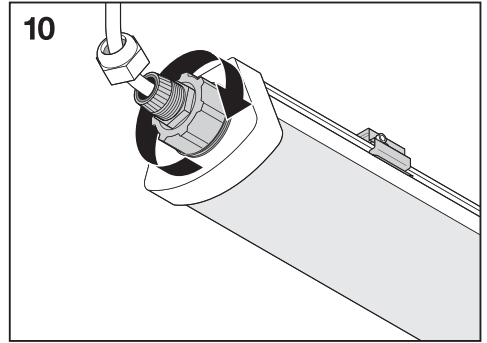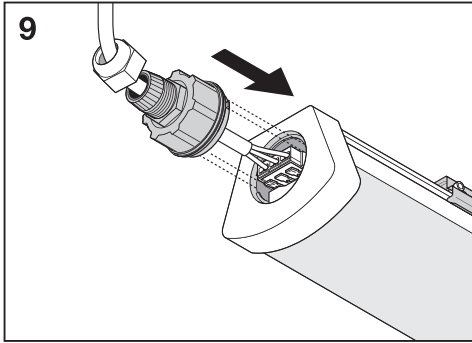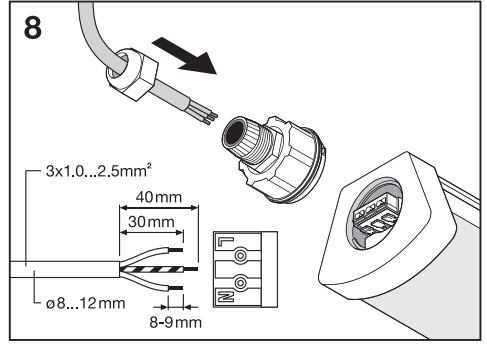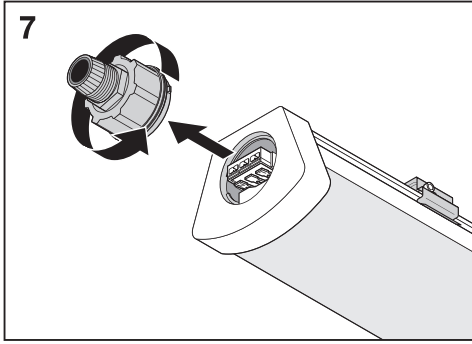

CE □ RoHS



C10449057  
G11031009  
06.03.18

 LEDVANCE GmbH  
Steinerne Furt 62  
86167 Augsburg, Germany  
[www.ledvance.com](http://www.ledvance.com)