

# NOCTIS LUX 2

SLI029042CW\_CZUJNIK



See  
more

Floodlight NOCTIS LUX 2, with a power of 20 W. It has a high IP44 rating, making it ideal for use in areas of high humidity. It shines with a cold light (6000K). Designed for surface mounting.


IP44



Power	<b>20 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>1850 lm (120°)</b>	Colour temperature	<b>6000 K</b>
Colour of light	<b>CW</b>	Beam angle	<b>100 °</b>
Degree of protection (IP)	<b>IP44</b>		


## Technical data

Code	SLI029042CW_CZUJNIK
Power	20 W
Nominal current	100 mA
Voltage	230 V
Energy consumption	20 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	+
Power factor	0,5
Useful luminous flux*	1850 lm (120°)
Luminous flux**	1800/1850 lm (360°)
Lamp efficacy	90 lm/W
Colour temperature	6000 K
Colour of light	CW
Beam angle	100 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum, PLASTIC, GLASS
Degree of protection (IP)	IP44
Colour	White
Dimension (AxBxC)	158x121x25 mm
For use	Inside/Outside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC

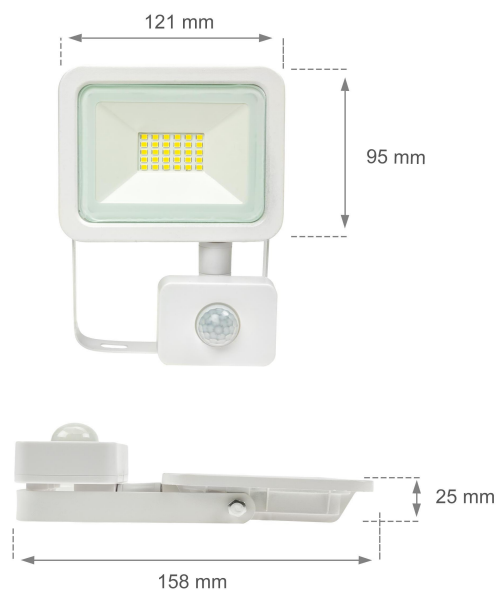

## Related documents



 Declaration of Conformity



 Photometric file

	<p>Radiator skutecznie odprowadzający ciepło</p> <p>Trwałe diody LED</p> <p>Hartowane szkło</p> <p>Klasa szczelności IP65</p> <p>Uchwyt regulowany</p> <p>Gumowany kabel 30cm</p> <p>Uchylny czujnik ruchu PIR</p> <p>Długi uchwyt</p>	
<p>Regulacja czasu świecenia min: 10 sec ± 3 sec max: 7 min ±12min</p> <p>Regulacja czułości/zasięgu detekcji 2-10m (&lt; 24°C)</p> <p>Regulacja czujnika zmierzchowego 3-2000 LUX</p>	<p>121 mm</p> <p>95 mm</p> <p>158 mm</p> <p>25 mm</p>	<p>121 mm</p> <p>95 mm</p> <p>158 mm</p> <p>25 mm</p>