



TrueForce - LED HID HPL



TForce LED HPL ND 38-28W E27 830

Philips TrueForce LED lamps provide an easy LED solution with a fast payback to replace High-Intensity Discharge (HID) and High Pressure Sodium (SON) lamps. These post-top lamps bring the energy efficiency and long lifetime benefits of LED to HID replacement, delivering instant savings for a low initial investment. With the right lamp size and light distribution, customers can easily retrofit TrueForce LED lamps into their existing HPL and SON system, thereby enhancing the light quality with LED HID, without having to change the fixtures or sacrifice the light effect.

Warnings and Safety

- Installation should always be performed by a qualified electrician or installer. Use the installation guide for instructions
- <https://www.assets.signify.com/is/content/Signify/phl-led-hid-eu-compatibility-list-professional>

Product data

General Information	
Cap-Base	E27
Nominal lifetime	50,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere

Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	360 degree(s)
Luminous Flux	3,800 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	135 lm/W

Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	28 W
Lamp Current (Nom)	125 mA
Starting Time (Nom)	0.45 s
Warm-up time to 60% light	0.45 s
Power Factor (Fraction)	0.95
Voltage (Nom)	220-240 V

TrueForce - LED HID HPL

Ballast Compatibility	EM/Mains
Inrush current at mains	4.6
Max. lamp no. on MCB B type 10A - Mains	47
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	47
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	8
Max. lamp no. on MCB B type 16A - Mains	74
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	74
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	14

Temperature

T-Case Maximum (Nom)	60 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Clear
Bulb Shape	Others
Net Weight (Piece)	0.370 kg

Approval and Application


Energy Efficiency Class	D
-------------------------	---

Energy Consumption kWh/1000 h	28 kWh
EPREL Registration Number	403570
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	1.6
Ambient temperature range	-30 to +45 °C

Product Data

Order product name	TForce LED HPL ND 38-28W E27
	830
Full product name	TForce LED HPL ND 38-28W E27
	830
Full product code	871869963818400
Order code	929002006302
Material Nr. (12NC)	929002006302
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699638184
Numerator - Packs per outer box	6
EAN/UPC - Case	8718699638191



Dimensional drawing



Product	D	C
TForce LED HPL ND 38-28W E27 830	75 mm	178 mm


TrueForce - LED HID HPL

Photometric data

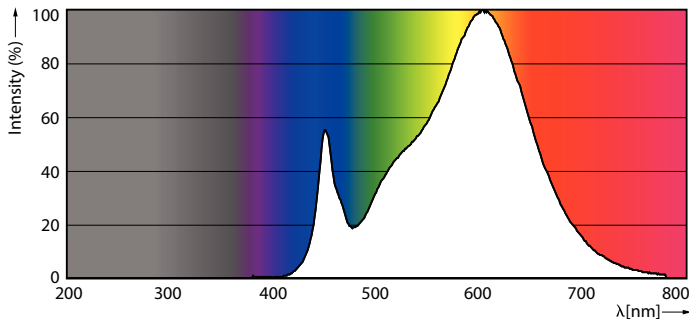

Spectral Power Distribution Colour - TForce LED HPL ND 38-28W E27 830


Light Distribution Diagram - TForce LED HPL ND 38-28W E27 830




General Uniform Lighting
TForce LED HPL ND 38-28W E27 830

General uniform lighting - TForce LED HPL ND 38-28W E27 830

Lifetime

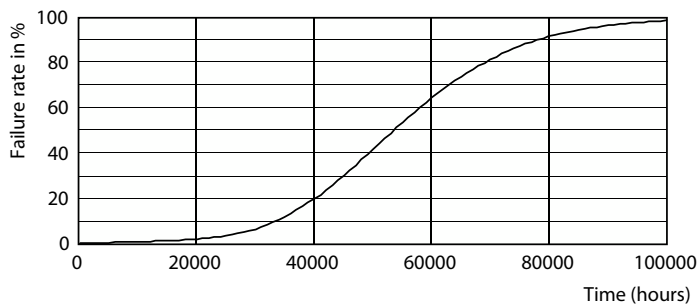

LEDTrueForce Others 360

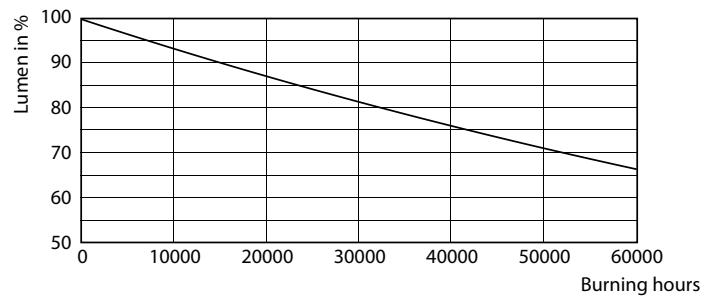

Lumen Maintenance Diagram - TForce LED HPL ND 38-28W E27 830

TrueForce - LED HID HPL

