



# CorePro LED PLC

## CorePro LED PLC 4.5W 840 2P G24d-1

Philips CorePro LED PLC is the ideal uplamping solution for downlights in a wide range of general lighting applications. It integrates a LED light source into a traditional fluorescent form factor to offer superb energy savings over a lifetime that's twice as long as fluorescent alternatives.

#### **Product data**

General Information	
Cap-Base	G24D-1 [ G24d-1]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	30000 h
Switching Cycle	50000X
Light Technical	
Color Code	840 [ CCT of 4000K]
Luminous Flux (Nom)	500 lm
Correlated Color Temperature (Nom)	4000 K
Color Consistency	<6
Color Rendering Index (Nom)	83
LLMF At End Of Nominal Lifetime (Nom	n) 70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Nom)	4.5 W
Lamp Current (Max)	25 mA
Lamp Current (Min)	20 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9

Voltage (Nom)	220-240 V			
Temperature				
T-Ambient (Max)	35 ℃			
T-Ambient (Min)	-20 °C			
T-Storage (Max)	65 °C			
T-Storage (Min)	-40 °C			
T-Case Maximum (Nom)	60 °C			
Controls and Dimming				
Dimmable	No			
Mechanical and Housing				
Product Length	100 mm			
Approval and Application				
Energy Efficiency Label (EEL)	A++			
Energy Saving Product	Yes			
Approval Marks	TUV CE marking RoHS compliance KEMA Keur			
	certificate			
Energy Consumption kWh/1000 h	5 kWh			
Product Length  Approval and Application Energy Efficiency Label (EEL) Energy Saving Product Approval Marks	A++ Yes TUV CE marking RoHS compliance KEMA Ke			

Datasheet, 2019, November 15 data subject to change


#### CorePro LED PLC

Product Data	
Full product code	871869670661900
Order product name	CorePro LED PLC 4.5W 840 2P G24d-1
EAN/UPC - Product	8718696706619
Order code	929001350802
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	10		
Material Nr. (12NC)	929001350802		
Net Weight (Piece)	0.070 kg		

#### Warnings and Safety

#### Dimensional drawing




PLED PLC 230V 5W 500lm 4000K G24D-1 ND

Product	D1	D2	A1	A2	А3
CorePro LED PLC 4.5W 840 2P	24.3 mm	28.4 mm	95.8 mm	115 mm	137.6 mm
G24d-1					

800 λ[nm]→

#### Photometric data



Calculat Procuments 43 Philips Lighting EV. Page: 51

100

Intensity (%) – 9 %

40

20

200

### LEDtube 100mm 5W G24D-1 840 500lm


400

500

600

300


#### CorePro LED PLC 100mm 5W G24D-1 840 500lm




LEDtube 100mm 5W G24D-1

#### CorePro LED PLC

#### Lifetime

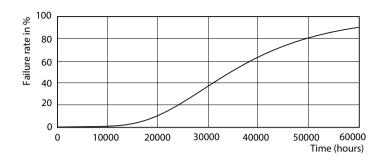



LEDtube 100mm 5W G24D-1

LEDtube 100mm 5W G24D-1



© 2019 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.