


# PRODUCT DATASHEET

## PL CMFT 600 P 36W 930 940 U19 DALIVR CS CRI90

PANEL COMFORT 600 UGR<19 DALI CS CRI90 | Square recessed panel luminaires with CRI90, CCT select (CS) feature and low glare, for 600 x 600 mm ceiling systems and DALI-2 IoT technology

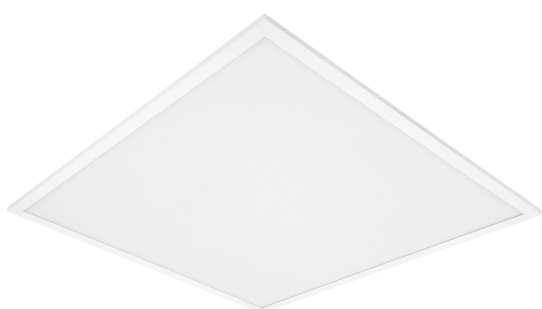

### Areas of application

- Direct replacement for recessed luminaires with fluorescent lamps
- Offices, conference rooms
- Reception areas, foyers, corridors, elevators
- Schools, public buildings
- Suitable for recessed ceiling systems with grid size of 600 x 600 mm

### Product benefits

- Suitable luminaire for VIVARES and other DALI-2 Light Management Systems
- High performance with CRI90 and up to 118 lm/W
- Highly versatile due to selectable CCT (CCT Select - CS)
- High color consistency with SDCM 3
- Good glare reduction (UGR < 19)
- Through-wiring possible with included connector box
- External driver for extended flexibility and easy installation
- Low flicker light thanks to special electronic control gear
- Extended services such as energy monitoring and remote maintenance possible with DALI versions
- 5 years guarantee

### Product features

- IoT-ready luminaire with DALI-2 technology
- Extruded aluminum frame
- Polystyrene diffuser
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm<sup>2</sup>

– Lifetime (L80/B10): up to 60,000 h (at 25 °C)

## TECHNICAL DATA

### Electrical data


Nominal wattage	36.00 W <sup>1)</sup>
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	165.000 mA
Inrush current	12 A
Inrush current time T <sub>h50</sub>	200 µs
Max. number of luminaires per miniature circuit breaker B16	20
Max. number of luminaires per miniature circuit breaker C10	21
Max. number of luminaires per miniature circuit breaker C16	33
Power factor λ	> 0.90
Total harmonic distortion	< 20 %
Protection class	II
Operating mode	External LED driver
Dimming interface	DALI-2 / IoT

<sup>1)</sup> For possible options refer to lumen/power table image

### Photometrical data

Luminous flux	4200 lm <sup>1)</sup>
Luminous efficacy	118 lm/W <sup>1)</sup>
Color temperature	3000 K / 4000 K
Light color (designation)	Warm White / Cool White
Color rendering index Ra	≥90
Standard deviation of color matching	3 sdc <sub>m</sub>
Luminous intensity	- cd
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	< 0.4
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	90 °
UGR	< 19


<sup>1)</sup> For possible options refer to lumen/power table image

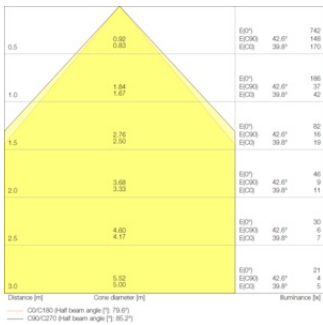


PL CMFT 600 36W 930 DALI EM mode




PL CMFT 600 36W 930 DALI mode

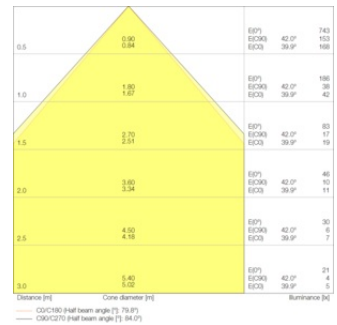


PL CMFT 600 36W 940 DALI EM mode

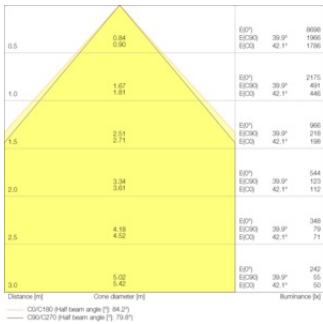


PL CMFT 600 36W 940 DALI mode

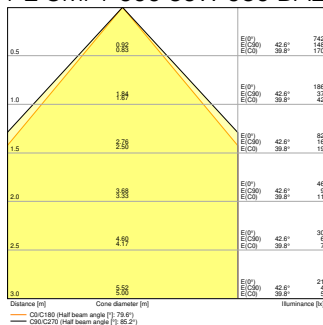


PL CMFT 600 36W 930 DALI EM mode

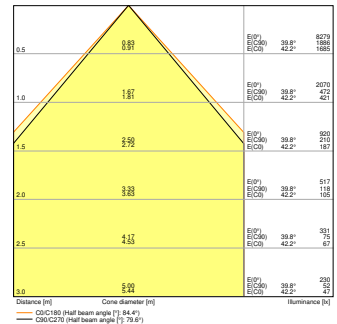


PL CMFT 600 36W 930 DALI mode

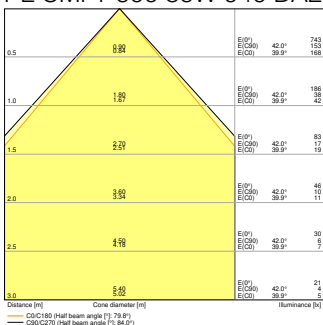


PL CMFT 600 36W 940 DALI EM mode

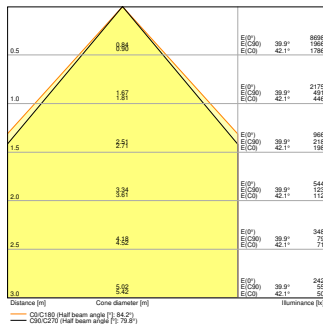


PL CMFT 600 36W 940 DALI mode

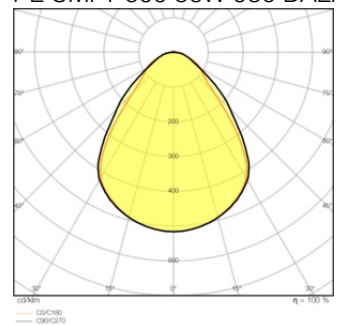


PL CMFT 600 36W 930 DALI EM mode

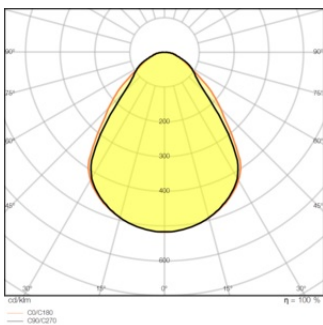


PL CMFT 600 36W 930 DALI mode

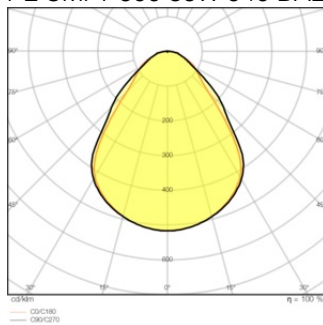


PL CMFT 600 36W 940 DALI EM mode

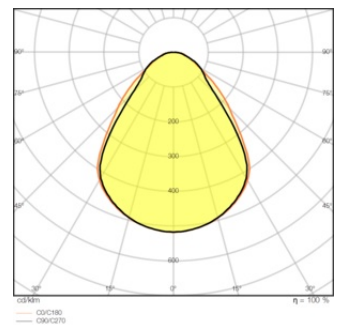


PL CMFT 600 36W 940 DALI mode

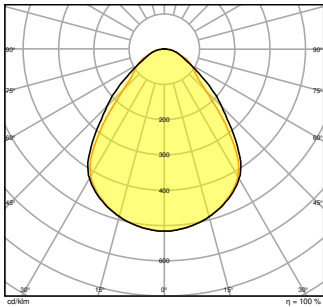


PL CMFT 600 36W 930 DALI EM mode

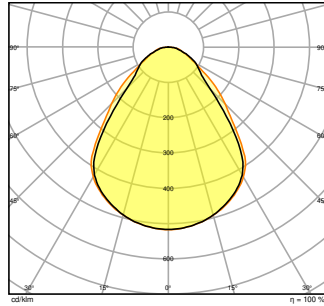

PL CMFT 600 36W 930 DALI

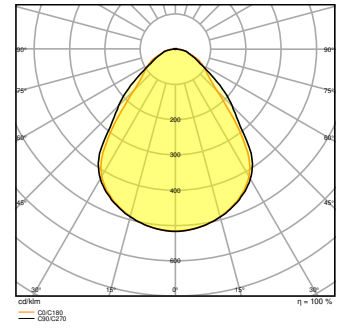


PL CMFT 600 36W 940 DALI EM mode

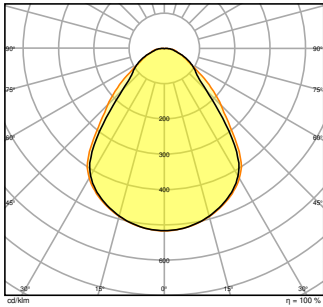

PL CMFT 600 36W 940 DALI

### Dimensions & Weight

Length	595.00 mm
Width	595.00 mm
Height	32.00 mm
Product weight	2050.00 g

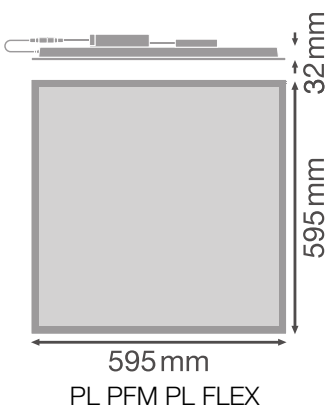

### Materials & Colors

Product color	White
Housing color	White
Body material	Steel

Cover material	Polystyrene (PS)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-10...+50 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP40/IP20
Protection class IK (shock resistance)	IK02
Dimmable	Yes
Type of dimming	DALI
Mounting type	Surface/Recessed
Mounting location	Ceiling / Wall
Application environment	Indoor
Mounting length	575 mm
Mounting width	575 mm
Mounting depth	80,0 mm
With light source	Yes

### Lifespan

Lifespan L70/B50 at 25 °C	100000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	60000 h <sup>1)</sup>
Lifespan L80/B50 at 25 °C	60000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	50000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

Output current	1100 mA
ECG - Output ripple current	10 %

### Emergency lighting

Wattage in emergency operation mode	3,0 W
Luminous flux in emergency operation mode	360 lm

### Certificates & Standards

Standards	CB / CE / ENEC / EAC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable














## Additional product data























Added function	MULTI SELECT / VIVARES
----------------	------------------------

## EQUIPMENT / ACCESSORIES


- Accessories for several mounting options available
- Separate switch preinstalled to choose preferred CCT during installation
- Connector box with 5-pole terminal included
- Security rope for luminaire included
- Security brackets included
- External control gear included

## DOWNLOAD DATA

	Documents and certificates	Document name
	User instruction / safety instructions	PANEL COMFORT CRI90 600 / 625
	Legal information	LSI PL CMFT
	Legal information	PL CMFT U19
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	CE Declaration of Conformity PL CMFT U19 DALI
	Declarations of conformity UKCA	UKCA Declaration of Conformity PL CMFT U19 DALI
	Declarations of conformity UKCA	PANEL DALI
	Photometric and lighting design files	Document name
	IES file (IES)	PL CMFT 600 36W 930 DALI
	IES file (IES)	PL CMFT 600 36W 940 DALI
	LDT file (Eulumdat)	PL CMFT 600 36W 930 DALI
	LDT file (Eulumdat)	PL CMFT 600 36W 940 DALI EM mode
	ULD file (DIALux)	PL CMFT 600 P 36W
	ROLF file (RELUX)	PL CMFT 600 P

Photometric and lighting design files		Document name
	UGR file (UGR table)	PL CMFT 600 36W 930 DALI EM mode
	UGR file (UGR table)	PL CMFT 600 36W 930 DALI
	UGR file (UGR table)	PL CMFT 600 36W 940 DALI EM mode
	UGR file (UGR table)	PL CMFT 600 36W 940 DALI
	Light distribution curve type cone	PL CMFT 600 36W 930 DALI EM mode
	Light distribution curve type cone	PL CMFT 600 36W 930 DALI
	Light distribution curve type cone	PL CMFT 600 36W 940 DALI EM mode
	Light distribution curve type cone	PL CMFT 600 36W 940 DALI
	Light distribution curve type cone	PL CMFT 600 36W 930 DALI EM mode
	Light distribution curve type cone	PL CMFT 600 36W 930 DALI
	Light distribution curve type cone	PL CMFT 600 36W 940 DALI EM mode
	Light distribution curve type cone	PL CMFT 600 36W 940 DALI
	Light distribution curve type polar	PL CMFT 600 36W 930 DALI EM mode
	Light distribution curve type polar	PL CMFT 600 36W 930 DALI
	Light distribution curve type polar	PL CMFT 600 36W 940 DALI EM mode
	Light distribution curve type polar	PL CMFT 600 36W 940 DALI
	Light distribution curve type polar	PL CMFT 600 36W 930 DALI EM mode
	Light distribution curve type polar	PL CMFT 600 36W 930 DALI
	Light distribution curve type polar	PL CMFT 600 36W 940 DALI EM mode
	Light distribution curve type polar	PL CMFT 600 36W 940 DALI
CAD/BIM files		Document name
	BIM Revit 3D	PL_CMFT
	CAD STEP 3D	PL_CMFT_600




Tender texts	Document name
 Tender documents	PANEL COMFORT 600 UGR19 DALI 36W 930 940 U19 DALIVR-EN

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075694507	Folding box 1	52 mm x 622 mm x 694 mm	2535.00 g	22.45 dm <sup>3</sup>
4058075694514	Shipping box 4	640 mm x 220 mm x 710 mm	11435.00 g	99.97 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**ADDITIONAL CATALOG INFORMATION**



	T <sub>K</sub> (Kvlnj) / W <sub>Ac</sub>	lm		lm/W	
		29.5W	36W	29.5W	36W
PANEL CMFT 36W CPS	4000K	3600 lm	4200 lm	122 lm/W	118 lm/W
	3000K	3400 lm	4000 lm	118 lm/W	112 lm/W
PANEL CMFT 36W DALI	4000K	-	4200 lm	-	118 lm/W
	3000K	-	4000 lm	-	112 lm/W

**References / Links**

- For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.