



# DIY catalogue

Catalogue 08/2022

Get it right, right away - do it yourself the professional way

[se.com](https://se.com)

Life Is On

**Schneider**  
Electric





Life Is On **Schneider**  
Electric

Life Is On **Schneider**  
Electric

Life Is On **Schneider**  
Electric

Trend

Strombrytare

Renova

Exact

QuickFit

Schneider  
Electric

Schneider  
Electric




Life Is On **Schneider**  
Electric

Life Is On **Schneider**  
Electric

Life Is On **Schneider**  
Electric

Presentation .....	5
Clips.....	10
Thorsman Clips for DIY .....	10
Clamps .....	12
Thorsman Clamps for DIY .....	12
Plugs.....	13
Thorsman Plugs for DIY .....	13
Cavity fixings .....	14
Thorsman Cavity fixings for DIY .....	14
Screws and bolts .....	15
Thorsman Screws for DIY .....	15
Boxes with accessories .....	17
Flush mounted boxes & accessories for DIY.....	17
Connectors for DIY .....	19
Grommets & Cable Glands for DIY .....	20
Test instruments .....	21
Cable reels .....	28
LED Floodlights .....	29
LED Worklamps.....	30
LED Worklights.....	32
Cable ties.....	34
Tapes.....	36
Trailing leads .....	37
French pin trailing leads .....	37
Schuko pin trailing leads.....	39
Desk Unit range.....	41
Cable Management range .....	42
Reference number overview.....	43





For me the choice is simple. I use professional installation material from Schneider Electric.







# Colour-coded material fit for purpose



P138786-layout0952.eps

Our DIY products are as easy to find in the store as they are to use at home. Just let our colour-coded system guide you to the right fixing material for your needs.

- Universal plugs for all building materials
- Fixings for solid materials
- Fixings for board materials
- Cable fixings

## Some examples



P138712-layout03464.eps

**Universal screw plug Quicki TPN**  
For all types of wall materials. Two sizes cover most needs.



P124755-layout03476.eps

**Cavity fixing Platti TPP**  
Metal fixing, for heavy loads in board materials with a thickness of 10–35 mm.



P124776-layout03489.eps

**Through bolt TEX**  
High-quality steel anchor. For heavy loads in concrete or natural rock materials.



P138796-layout03500.eps

**Cable clips TC and TCS**  
With nail or screw, for round or flat cables. Impact-resistant material.



P138790-layout055.eps



# Your sales tools

Schneider Electric has a range of DIY installation material products, including products like clips, clamps, plugs, cavity fixings, screws, flush and surface mounted boxes. All products are packed in pin-packs with a clear marking and simple mounting instructions. To support the sales we have created several sales tools to high-light the quality of our products as well as the easiness to use them. Choice guides and animations make it easy to choose the right product and to understand how it works.

## Consumer brochures

### Brochure with a focus on fixing material

This is not an ordinary sales brochure. It is a brochure that gives good tips and important facts about fixing techniques. Of course it also includes choice guides and technical facts about each fixing. This is a real handbook that we think will be used by your customers as soon as they have a need of high-quality and reliable fixings. Below you can see some pages from the brochure.



### Brochure with a focus on cabling material

We have also created a similar brochure for cabling material. Here you will find products and information to get a grip on home cabling. Take a look at Rapstrap – the innovative





# Your sales tools

For the stores we have created some eye-catching top signs and bus-stops. The choice guide is clear and simple, and easy to understand.



## Top signs

### Fixing material

**Get it right, right away!**

Schneider Electric

LSB02965\_DIY\_Fixings.eps

### Cabling material


**Get a grip on home cabling**

Schneider Electric

LSB00000\_DIY\_Cabling\_CSS.eps



## Bus-stops



### Fixing material

Schneider Electric

Thorsman

**Get it right, right away!**

LSB02960\_DIY\_Fixings\_1.eps

**Do it yourself the professional way**

Now all our professional installation material is available to anyone interested in home improvement.

Watch how it's done! Use the QR-code to view our instructional movies.

Schneider Electric

**Thorsman Fixing Guide**

Universal plugs for all building materials

TP1	Wall plug	
TPH	Universal expansion anchor	
TP2	Chip nail	

Fixings for solid materials

TEX	Through bolt	
HSS	Concrete screw	

Fixings for board materials

TPP	Coaly frame PLATTI	
TPK	Coalyfing	
TPQ	Coalyfing DVO-MAX	
TPD	Coalyfing	
TPM	Coalyfing	

**Get it right, right away!**

Now all our professional installation material is available to anyone interested in home improvement.

Watch how it's done! Use the QR-code to view our instructional movies.

LSB02960\_DIY\_Fixings\_2.eps

### Cabling material

Schneider Electric

**Get a grip on home cabling**

**Do your home cabling the professional way**

Making your home safe and comfortable is so much more fun and easy with the appropriate materials. Our range includes the perfect products for any home cabling situation.

The multi-talented cable wiring

Single or double design, sturdy, resistant and suitable for various mobile applications.

LSB00000\_DIY\_Cabling\_1.eps

Schneider Electric

**New! Rapstrap**

Rapstrap is smooth, flexible and one of a kind. It can loop and weave into a multitude of configurations. Just tie, cut and use again.

One single Rapstrap, several uses

Reusable and reusable

Thousands of uses

Thousands of uses. Only one Rapstrap. Scan the code to find out more!

LSB00000\_DIY\_Cabling\_2.eps

# Website with fixing guide, animations and technical information

On the bus-stop and in the brochure you can see a QR-code. By scanning this code the customer will get a link to a website that includes a fixing guide, animations that show

how the products should be used and all necessary technical information about each fixing product.



P139157-layout04954.eps


# Packagings with clear marking and simple mounting instructions

All products are packed in informative pin-packs with a clear marking and simple and easy-to-understand mounting instructions.

Here you can see an example of the packaging for DUO-MAX.



P139474-layout04980.eps

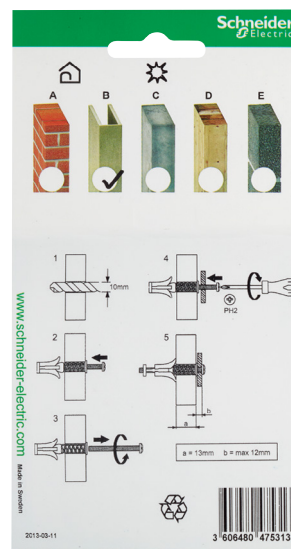

P139475-layout04982.eps



# Clips

## Thorsman Clips for DIY

### Clips



### Clips

Type	Colour	Dimensions Nail Ø/A/B (mm)	Qty per package <sup>1)</sup>	EAN code	Ref. No.
<b>Round nail clip TC</b>					
Plastic clip including nail, for installations of round cables, mainly for indoor use. For DIY. Material: Clip of PP, nail of hardened and electroplated steel.					
TC 3-5	Clear	1.2/20/15	25	3606480475382	IMT37422
	White	1.2/20/15	25	3606480475511	IMT37435
	Black	1.2/20/15	25	3606480787744	IMT37532
TC 4-6	Clear	1.4/20/14	25	3606480475399	IMT37423
TC 5-7	Clear	1.2/20/12	25	3606480475412	IMT37425
	White	1.2/20/12	25	3606480475405	IMT37424
	Light grey	1.2/20/12	25	3606489929695	IMT80005
TC 7-10	White	1.6/25/16	20	3606480475429	IMT37426
	Light grey	1.6/25/16	20	3606480787768	IMT37534
TC 8-12	White	2.0/30/18	20	3606480475436	IMT37427
	Light grey	2.0/30/18	20	3606489929701	IMT80006
TC 10-14	Light grey	2.0/30/17	10	3606480475443	IMT37428
	White	2.0/30/17	10	3606480475450	IMT37429
TC 14-20	White	2.0/35/18	10	3606480475528	IMT37436
	Light grey	2.5/35/18	10	3606480475467	IMT37430
<b>Flat nail clip TC</b>					
Plastic clip including nail, for installations of flat cables, mainly for indoor use. For DIY. Material: Clip of PP and nail of hardened and electroplated steel.					
TC 2x4	Clear	1.4/15/11	25	3606480475474	IMT37431
TC 3x5	Clear	1.2/20/15	25	3606480475481	IMT37432
	Bronze	1.2/20/15	25	3606480475498	IMT37433
	White	1.2/20/15	25	3606480476105	IMT37494
TC 6x10	White	2.0/25/17	25	3606480475504	IMT37434
Plastic clip including nail, for installations of flat cables, for indoor or outdoor use. Corrosivity category C5M. Especially suited for tough environments. For DIY. Material: Clip of PP, nail of hardened and Fe/Zn electroplated steel.					
TC-C5M 6x9	White	1.6/25/17	25	3606480475825	IMT37466
<b>Round screw clip TCS</b>					
Plastic clip with screw, intended for indoor or outdoor installations in walls and ceilings, with or without wall plug. Screw with surface treatment acc. to corrosivity class C3 and cross-slotted head type Phillips 2. For round cables. For DIY. Material: PP/Steel.					
TCS-C3 7-10	White	32/23/5.0	10	3606480475771	IMT37461
TCS-C3 8-12	White	32/21/5.0	10	3606480475788	IMT37462
TCS-C3 10-14	White	38/26/5.0	10	3606480475740	IMT37458
TCS-C3 14-18	White	38/23/5.0	6	3606480475757	IMT37459
	Black	38/23/5.0	6	3606480787751	IMT37533
TCS-C3 18-22	White	41/23/5.0	6	3606480475764	IMT37460

1) When ordering, the Ref. No. implies the quantity one (1). Each Ref. No. includes the quantities stated in this document.

# Clips

## Thorsman Clips for DIY

### Cable wing - Cable cleat







Cable wing double



Cable wing single



Cable cleat CC5

Clips							
Type	Colour	Dimensions A/B/C (mm)		Qty per package <sup>1)</sup>	EAN code	Ref. No.	
<b>Cable wing</b>							
Cable wing, double, without nail-plug. Intended for cable installation on both sides. For DIY. Material: PA.							
P119531		Cable wing	Dark grey	23/20/230	2	3606480476051	<b>IMT37489</b>
					10	3606480217210	<b>IMT39079</b>
Cable wing, single, without nail-plug. Intended for cable installation on one side. For DIY. Material: PA.							
P119752		Cable wing	Dark grey	20/20/130	2	3606480476044	<b>IMT37488</b>
					10	3606480217197	<b>IMT39077</b>
<b>Cable cleat</b>							
Heavy duty cable cleats with corrosion and UV light resistant. operation temp -35 to +85 degrees. Material: LDPP.							
P148432		CC5	Black	28/17/15	25	3606489505134	<b>IMT22001</b>
		CC6	Black	33/20/20	25	3606489505141	<b>IMT22002</b>
		CC7	Black	36/23/16	25	3606489505158	<b>IMT22003</b>

<sup>1)</sup>When ordering, the Ref. No. implies the quantity one (1). Each Ref. No. includes the quantities stated in this document.



# Clamps

## Thorsman Clamps for DIY

### Clamps



### Clamps

Type	Nail ØxL	Dimensions A/B (mm)	Qty per package <sup>1)</sup>	EAN code	Ref. No.
<b>Steel clamp TKK</b>					
Clamps for indoor and outdoor installations of round and flat electric cables. For DIY. Material: Powder coated, electroplated sheet steel. Colour: White.					
TKK 7-10 For round cables	2.1x40	Ø2.1/18	20	3606480475597	<b>IMT37443</b>
		Ø2.1/25	20	3606480475603	<b>IMT37444</b>
TKK 6x9 For flat cables	2.1x40	Ø2.1/18	20	3606480475610	<b>IMT37445</b>
		Ø2.1/25	20	3606480475627	<b>IMT37446</b>
<b>Nailing tool TKK-E</b>					
Simple tool for nailing of TKK clamps. Suitable for TKK 7-10 and 6x9. For DIY. Material: PAG.					
TKK-E	Red	13/66/12	1	3606480482502	<b>IMT37507</b>
<b>Plastic clamp TK</b>					
Plastic clamp for round cables or conduits. Installation in wood is done by using wood screws. For installations in concrete, brick, plasterboard, etc., use TP plugs and wood screws, or TPS nail plugs. For DIY. Material: PP (polypropylene).					
TK 3-5	White	6/15/9	25	3606480475535	<b>IMT37437</b>
TK 5-7	White	8/18/9	25	3606480475542	<b>IMT37438</b>
TK 7-10	White	11/20/9	20	3606480475559	<b>IMT37439</b>
TK 10-14	White	14/27/13	20	3606480475566	<b>IMT37440</b>
TK 14-20	White	19/35/14	10	3606480475573	<b>IMT37441</b>
Same as above but for flat cables or conduits. Material: PP (polypropylene).					
TK 6x9	white	19.5/9/7	25	3606480475580	<b>IMT37442</b>
<b>Metal clamp TFK</b>					
Clamp with two nails, intended for use in stationary installations of round cables or conduits. Mounted with a hammer. The steel clamp is electroplated. Corrosivity category C2. Material: Hardened steel, electroplated.					
TFK 16 16 mm nail	Metal	33/16/3	10	3606480787737	<b>IMT37531</b>

<sup>1)</sup> When ordering, the Ref. No. implies the quantity one (1). Each Ref. No. includes the quantities stated in this document.

# Plugs

## Thorsman Plugs for DIY

### Plugs



TP 2B



TPN-6x35



TCP-0

### Plugs

Type	Colour	Dimensions Ø/L (mm)		Qty per package <sup>1)</sup>	EAN code	Ref. No.
------	--------	---------------------	---	-------------------------------	----------	----------

#### Wall plug TP

Double-expanding, easy-to-install wall plug, colour coded for easy size identification. To be used in applications where shear loads dominate. Smooth surface for maximum friction. Suitable for concrete, stone, low-density concrete, expanded clay, hollow bricks and blocks, solid bricks and plasterboard. For DIY.

Material: Polyethylene (HD).

TP 1	Yellow	5.5/22		20	3606480475160	IMT37400
TP 2	Red	5.5/35		20	3606480475177	IMT37401
TP 2B	Brown	8/40		10	3606480475184	IMT37402
TP 3	Blue	10/45		10	3606480477232	IMT37505
TP 4	Green	12/60		5	3606480477249	IMT37506
TP 6	Red	6/30		20	3606489929718	IMT80007

#### Universal plug QUICKI TPN

Universal wall plug including fully threaded screw, for all types of wall material. The expansion function securely locks the load on the back of the plasterboard. Suitable for concrete, natural stone, low-density concrete 500 (not in porous low-density concrete 400-450), expanded clay, hollow blocks and bricks, solid bricks and plasterboard. For DIY.

Material: PA (polyamide) and steel.

TPN-6x35	Grey	6/35		10	3606480475191	IMT37403
TPN-8x50	Grey	8/50		5	3606480484278	IMT37515

#### Clip plug TCP

Clip plug for the installation of cable clips and nails. Suitable for concrete, stone, low-density concrete, expanded clay, solid bricks and plasterboard. For DIY.

Material: PS (polystyrene).

TCP-0	White	7.5/18		20	3606480475207	IMT37404
TCP-1	Yellow	7.5/25		10	3606480475214	IMT37405

#### Nail plug

Nail plug for all types of through installation, such as electrical trunking, switches, battens, cable clamps, door and window frames. Suitable for concrete, stone, low-density concrete, expanded clay, hollow blocks, solid bricks and plaster-boards.

Material: PA (polyamide).

TPS 5	White	10/75		15	3606489929725	IMT80008
TPS 6	White	10/75		15	3606489929732	IMT80009

<sup>1)</sup>When ordering, the Ref. No. implies the quantity one (1). Each Ref. No. includes the quantities stated in this document.



# Cavity fixings

## Thorsman Cavity fixings for DIY

### Cavity fixings



### Cavity fixings

Type	Colour	Dimensions A/B/C (mm)	Qty per package <sup>1)</sup>	EAN code	Ref. No.
<b>Cavity fixing PLATTI TPP</b>					
Metal cavity fixing with hook, specially suited for heavy loads. Large captive toggle, foldable. Suitable for mounting in walls and ceilings made of board material. For DIY. Material: Toggle and collar of zinc, hook and spring of steel.					
TPP-10xM4K	—	Ø20x95	2	3606480475283	IMT37412
Same as above but with screw					
TPP-10xM4S	—	Ø15x76	5	3606480476839	IMT37498
TPP-13xM5S	—	Ø18x90	5	3606480475290	IMT37413
<b>Cavity fixing TPD</b>					
Self-drilling cavity fixing for lightweight installations in plasterboard, including wood screw with cross-slot Pozidriv 2. For DIY. Material: Zinc. Electroplated steel screw.					
TPD-Metal	—	Ø13x37	5	3606480475306	IMT37414
<b>Cavity fixing DUO-MAX TSP</b>					
Cavity fixing with screw, for medium-heavy loads. Installed without special tools. To be used for installations in one or several layers of plasterboard and in other board materials. Secure function even with insulation behind the board. For DIY. Material: PA (polyamide). Screw of electroplated steel.					
TSP-10/50	Blue	Ø20x56	5	3606480475313	IMT37415
TSP-10/75	Blue	Ø20x78	5	3606480475320	IMT37416
Same as above but with hook.					
Material: PA (polyamide). Hook of electroplated steel.					
TSP-10K	Blue	20x25x96	2	3606480475337	IMT37417
<b>Cavity fixing TMX</b>					
Expanding cavity fixing including fully threaded screw with combi-head and Phillips cross-slot. Expanded simply by tightening the screw with a screw-driver. Intended for heavy loads in board materials. For DIY. Material: Electroplated steel.					
TMX-4E	—	14/47	10	3606480475344	IMT37418
TMX-4D	—	14/62	5	3606480475351	IMT37419
TMX-5E	—	16/62	5	3606480475368	IMT37420
TMX-5D	—	16/74	5	3606480475375	IMT37421
<b>Cavity fixing THW</b>					
Cavity fixing including screw. The shape of THW prevents it from rotating. No pre-drilling needed, just hammer in. For DIY. Material: Steel, yellow-chromated (THW), electroplated (screw).					
THW 4.2x38	—	10/30/12	5	3606480475733	IMT37457

<sup>1)</sup>When ordering, the Ref. No. implies the quantity one (1). Each Ref. No. includes the quantities stated in this document.

### Screws



### Screws

Type	Dimensions A/B/C (mm)	Qty per package <sup>1)</sup>	EAN code	Ref. No.
<b>Concrete screw MULTI-MONTI MMS</b>				
Concrete screw with flange head 17 mm. No plug needed. Recess T-30. Suitable for concrete and solid brick materials. Mounting with cordless screwdriver or wrench. For DIY. Material: Steel, electroplated.				
MMS-MS	7.5x45	4	3606480476020	IMT37486
MMS-MF	7.5x70	4	3606480476037	IMT37487
<b>Universal screw TEL</b>				
Universal screw with panhead, Phillips PH2 recess. Single thread, sharp point. Fully threaded. Specially designed for electricians' needs. Suitable for wood, wood fibreboard, plasterboard, and together with plugs. Not for use in load bearing timber structures. For DIY. Material: Hardened, electroplated steel.				
TEL	4.2x25	20	3606480476082	IMT37492
TEL	4.2x35	20	3606480476099	IMT37493
<b>Universal screw TGS with plug</b>				
Universal screw with panhead, Phillips PH2 recess, + plug TP 1 or TP 2 respectively. Twin thread, sharp point. Fully threaded. Suitable for wood and wood fibreboard and together with plugs. For DIY. Material: Hardened, electroplated steel.				
TGS-4,2x31 + TP 1 yellow	Ø4.2x31	10+10	3606480476860	IMT37501
TGS-4,2x38 + TP 2 red	Ø4.2x38	10+10	3606480476853	IMT37500
TGS-4,2x38 + TP 3 blue	Ø4.2x38	10+10	3606489929756	IMT80001
TGS-4,2x38 + TP 6 red	Ø4.2x38	10+10	3606489929749	IMT80000
<b>Installation screw TMP-C3 with plug</b>				
Installation screw with raised countersunk head and Phillips PH2 recess, + plug TP 2B. Sharp point, fully threaded. Suitable for direct use in plasterboard and for 4 mm drilled holes in concrete and bricks. Corrosivity category C3. For DIY. Material: Hardened, electroplated steel.				
TMP-C3-5.0x45 + TP 2B brown	5.0x45	10+10	3606480476877	IMT37502
<b>Installation screw TSC with plug</b>				
Screw with large thin head, Phillips PH2 recess, + plug TP 1 or TP 2 respectively. Twin thread. TSC-4,2x13 fully threaded, TSC-4,2x45 part-threaded. Suitable when jointing two metal sheets together, maximum thickness 2x0.9 mm. Works in most materials – metal studwork, cabinets, wood, plugs. For DIY. Material: Hardened, electroplated steel.				
TSC-4,2x31 + TP 1 yellow Fully threaded	Ø4.2x31	10+10	3606480476884	IMT37503
TSC-4,2x45 + TP 2 red Part-threaded	Ø4.2x45	10+10	3606480476891	IMT37504

<sup>1)</sup>When ordering, the Ref. No. implies the quantity one (1). Each Ref. No. includes the quantities stated in this document.



### Bolts



TEX-C2 M6x70



TEX-C5M M8x95

### Bolts

P117745



#### Through bolt TEX-C2

Through bolt including nut and washer. Intended mainly for indoor installations in concrete or natural rock material. Fast-grip design, the bolt is set with a few turns of the nut. For DIY.  
Material: Steel, electroplated zinc.

TEX-C2 M6x40	M6x40	2	3606480475979	<b>IMT37481</b>
TEX-C2 M6x70	M6x70	2	3606480475986	<b>IMT37482</b>
TEX-C2 M8x50	M8x50	2	3606480475993	<b>IMT37483</b>

P117746



#### Through bolt TEX-C5M

Through bolt including nut and washer. Suitable in installations in concrete or natural rock material, outdoors as well as in extreme indoor environments. Fast-grip design, the bolt is set with a few turns of the nut. For DIY.  
Material: Stainless steel, acid-proof.

TEX-C5M M6x70	M6x70	2	3606480476006	<b>IMT37484</b>
TEX-C5M M8x95	M8x95	2	3606480476013	<b>IMT37485</b>

<sup>1)</sup>When ordering, the Ref. No. implies the quantity one (1). Each Ref. No. includes the quantities stated in this document.

### Flush mounted boxes



BP-KS

BP-RM

Cover plate  
Screw-fixed for  
apparatus box

TED-TAS

TED-TKS

TED-TKD  
With cable outlet  
Snap-fitted for junction box

### Multifix Flush-mounted boxes

Type	Colour	Dimensions A/B/C (mm)	Qty per package <sup>1)</sup>	EAN code	Ref. No.
<b>Junction box BP-201</b>					
Junction box with five Ø16 mm and two Ø20 mm stubs. Including screws. For DIY. Material: PE-HD.					
BP-201	Green	130/48/Ø82	1	3606480475924	IMT37476
<b>Apparatus box BP-202</b>					
Apparatus box with three Ø20 mm stubs. Reducing sleeves to Ø16 mm in two stubs, one rising and one dropping. Including screws. For DIY. Material: PE-HD.					
BP-202	Green	120/48/Ø74	1	3606480475931	IMT37477

### Accessories for flush-mounted boxes

<b>Connecting piece BP-KS</b>					
Connecting piece for the connection of apparatus boxes to provide a c/c distance of 71 mm. For DIY. Material: PE-HD.					
BP-KS	White	21/21/9	10	3606480475962	IMT37480
<b>Reducing sleeve BP-RM</b>					
Reducing sleeve for reduction of stubs from Ø20 to Ø16 mm. For DIY. Material: PE.					
BP-RM	Green	24/24/27	5	3606480614118	IMT37517
<b>Cover plates</b>					
Screw-fixed cover plate for apparatus boxes. For DIY. Material: PA.					
Cover plate Screw-fixed for apparatus box	White	Ø90	1	3606480475832	IMT37467
<b>Cover plates TED</b>					
Snap-fitted cover plate for apparatus or junction boxes. For DIY. Material: PC.					
TED-TAS Snap-fitted for apparatus box	White	Ø90	1	3606480475917	IMT37475
TED-TKS Snap-fitted for junction box	White	Ø100	1	3606480476068	IMT37490
TED-TKD With cable outlet Snap-fitted for junction box	White	Ø100	1	3606480476075	IMT37491

<sup>1)</sup>When ordering, the Ref. No. implies the quantity one (1). Each Ref. No. includes the quantities stated in this document.



### Surface mounted boxes



U56 with screw



K60 with screw



U56 with click-lid



Ø60x40 mm 4 grommets  
Ø20 mm



65x65x45 mm 7 grommets  
Ø20 mm

### Mureva Surface mounted boxes

Type	Colour	Dimensions A/B/C (mm)	Qty per package <sup>1)</sup>	EAN code	Ref. No.
<b>Box U56 with screw-fixed cover</b>					
Surface mounted junction box with screw-fixed cover. With ten grommets for cables up to Ø14 mm. IP65. For DIY. Material: ABS.					
U56	White	87/87/39	1	3606480475849	<b>IMT34468</b>
<b>Box U56 with screw-fixed cover and screw-type terminal blocks</b>					
Surface mounted junction box with screw-fixed cover and screw-type terminal blocks. With ten grommets for cables up to Ø14 mm. IP65. For DIY. Material: ABS.					
U56	White	87/87/39	1	3606480475856	<b>IMT34469</b>
<b>Box U56 with click-lid</b>					
Surface mounted junction box with click lid. With ten grommets for cables up to Ø14 mm. IP55. For DIY. Material: ABS.					
U56	White	87/87/39	1	3606480475894	<b>IMT34473</b>
<b>Box K60 with screw-fixed cover</b>					
Surface mounted junction box with screw-fixed cover. IP20. 440V. For DIY. Material: PA6/PP.					
K60	White	60/60/30	1	3606480475870	<b>IMT34471</b>
<b>Box K60 with screw-fixed cover and 5-pole screw-type terminal block</b>					
Surface mounted junction box with screw-fixed cover and 5-pole screw-type terminal block. IP20. Max. cable area 4x1.5 mm <sup>2</sup> or 3x2.5 mm <sup>2</sup> . 440V. For DIY. Material: PA6/PP.					
K60	White	60/60/30	1	3606480475887	<b>IMT34472</b>

Type	Colour	Dimensions A/B/C (mm)	Qty per package <sup>1)</sup>	Language	EAN code	Ref. No.
<b>Mureva BIP</b>						
Mureva BIP, surface mounted junction box with clipped-on cover, square or round. Including screw collar caps. Degree of protection IP55. Flame resistance 750 °C. Material: PP (polypropylene).						
Ø60x40 mm 4 grommets Ø20 mm	Grey	Ø75/50	1	EN, FR, ES, PT	3606489505561	<b>IMT22044</b>
			1	RU, RO, KK, PL	3606489505578	<b>IMT22045</b>
			5	EN, FR, ES, PT	3606489505608	<b>IMT22048</b>
Ø65x40 mm 4 grommets Ø20 mm	Grey	Ø84/48	1	EN, FR, ES, PT	3606489505622	<b>IMT22050</b>
			1	RU, RO, KK, PL	3606489505639	<b>IMT22051</b>
			5	EN, FR, ES, PT	3606489505660	<b>IMT22054</b>
65x65x45 mm 7 grommets Ø20 mm	Grey	81/81/51	1	EN, FR, ES, PT	3606489505684	<b>IMT22056</b>
			5	EN, FR, ES, PT	3606489505721	<b>IMT22060</b>
70x70x40 mm 6 grommets Ø20 mm	Grey	95/95/48	1	RU, RO, KK, PL	3606489505691	<b>IMT22057</b>
80x80x45 mm 7 grommets Ø20 mm	Grey	96/96/51	1	EN, FR, ES, PT	3606489505752	<b>IMT22063</b>
			5	EN, FR, ES, PT	3606489505783	<b>IMT22066</b>
85x85x40 mm 6 grommets Ø20 mm	Grey	110/110/48	1	RU, RO, KK, PL	3606489505769	<b>IMT22064</b>

<sup>1)</sup>When ordering, the Ref. No. implies the quantity one (1). Each Ref. No. includes the quantities stated in this document.

### Connectors



Push-in terminal 3



Push-in terminal 5



Connector strips  
2.5 mm<sup>2</sup>



Connector strips  
1.5 mm<sup>2</sup>



One-pole connectors



Connector strips  
Pack

### Accessories for surface mounted boxes

Type	Colour	Dimensions A/B/C (mm)	Qty per package <sup>1)</sup>	EAN code	Ref. No.
------	--------	--------------------------	----------------------------------	----------	----------

#### Thorsman Push-in terminals

Push-in terminal with three or five entries, approved for an ambient temperature of 90°C in Europe and 105°C in the US. The product is UL-approved. For DIY.  
Material: Copper, PA, PC, stainless steel.

P119621



With three entries	Green	8.9/15.7/17.2	10	3606480475948	<b>IMT37478</b>
--------------------	-------	---------------	----	---------------	-----------------

P119622



With five entries	Green	8.9/15.7/26	10	3606480475955	<b>IMT37479</b>
-------------------	-------	-------------	----	---------------	-----------------

#### One-pole terminal

Single terminal connector for connection of copper conductors. Degree of protection IP20. For DIY.  
Material: PC, copper.

P133949



Terminal connector	White	18/9/17	10	3606480482564	<b>IMT37513</b>
--------------------	-------	---------	----	---------------	-----------------

#### Connector strips

Connector strip for connection of copper conductors. Twelve connectors are put together in one strip. The user is to cut off the desired number of connectors. Degree of protection IP20. For DIY.  
Material: PA, copper.

P133948



1.5 mm <sup>2</sup>	White	13/16/94	2	3606480482519	<b>IMT37508</b>
---------------------	-------	----------	---	---------------	-----------------

2.5 mm <sup>2</sup>	White	19/18/117	2	3606480482526	<b>IMT37509</b>
---------------------	-------	-----------	---	---------------	-----------------

6 mm <sup>2</sup>	White	18/23/141	1	3606480482540	<b>IMT37511</b>
-------------------	-------	-----------	---	---------------	-----------------

P148428



Pack - 1x4mm <sup>2</sup> , 1x6mm <sup>2</sup> , 2x10mm <sup>2</sup> , 1x16mm <sup>2</sup>	Black	255/155/26	5	3606489505936	<b>IMT22081</b>
--	-------	------------	---	---------------	-----------------

				3606489505943	<b>IMT22082</b>
--	--	--	--	---------------	-----------------

#### Twist-on connector Thorsman TORIX T6

Twist-on connector for the connection of all kinds and combinations of wire. A test hole at the top of the connector ensures quick and easy testing of the connection with ordinary testing instruments. For DIY.  
Material: PA.

P4804



TORIX T6	Red	28/14/20	10	3606480475634	<b>IMT37447</b>
----------	-----	----------	----	---------------	-----------------

Type	Colour	Dimensions A/B/C (mm)	Qty per package <sup>1)</sup>	Language	EAN code	Ref. No.
------	--------	--------------------------	----------------------------------	----------	----------	----------

#### Choc Box

Choc Box is a connector cover (2-30 A), a junction box (fixed wiring) and a conduit box.  
Material: PA.

STENGER\_ODAS



CHOCBOX	White	28/90/50	1	EN	3606489505950	<b>IMT22083</b>
---------	-------	----------	---	----	---------------	-----------------

CHOCBOX	White	28/90/50	1	FR	3014722120219	<b>shn0212021</b>
---------	-------	----------	---	----	---------------	-------------------

<sup>1)</sup>When ordering, the Ref. No. implies the quantity one (1). Each Ref. No. includes the quantities stated in this document.



### Grommets and glands



TET 10-14



TET M7-10



Open grommet Ø25



Cable gland M20



Cable gland M25

### Grommets and glands

P:00448



Type	Colour	Dimensions A/B/C (mm)	Qty per package <sup>1)</sup>	EAN code	Ref. No.
------	--------	-----------------------	-------------------------------	----------	----------

#### Grommets Thorsman TET

Grommet suitable for untapped holes in material with a thickness from 1 to 4 mm. For completely dust and watertight cable and pipe inlets. For DIY.  
Material: EPDM rubber.

TET 7-10	Grey	Ø24/-/20	2	3606480475641	<b>IMT37448</b>
TET 10-14	Grey	Ø28/-/22	2	3606480475665	<b>IMT37450</b>

Grommet suitable for holes with metric thread in material with a thickness from 1 to 4 mm. For completely dust and watertight cable and pipe inlets. For DIY.  
Material: EPDM rubber.

TET M7-10	Grey	Ø25/-/20	2	3606480475696	<b>IMT37453</b>
TET M10-14	Grey	Ø 29/-/22	2	3606480475719	<b>IMT37455</b>

#### PVC cable grommets

Grommet suitable for holes with metric thread in material with a thickness from 1 to 4 mm. For completely dust and watertight cable and pipe inlets. For DIY.  
Material: EPDM rubber.

Blind grommet	Black	Ø20	25	3606489505530	<b>IMT22041</b>
	Black	Ø25	25	3606489505554	<b>IMT22043</b>
Open grommet	Black	Ø20	25	3606489505523	<b>IMT22040</b>
	Black	Ø25	25	3606489505547	<b>IMT22042</b>

P:150379



Type	Colour	Dimensions A/B/C (mm)	Qty per package <sup>1)</sup>	Language	EAN code	Ref. No.
------	--------	-----------------------	-------------------------------	----------	----------	----------

#### Cable glands according to ISO standard

Cable gland equipped with nut and neoprene seal for one cable. May be used both for threaded and unthreaded holes. The IP68 classification assures complete protection. The temperature range is between -25° and +80°C permanently and up to +150° C intermittently. For DIY.  
Material: PA6.

Cable gland M12	Grey	Ø20/30	5	RU, RO, KK, PL	3606489505240	<b>IMT22012</b>
			2	EN	3606480476136	<b>IMT37497</b>
Cable gland M16	Grey	Ø24/35	5	EN, FR, ES, PT	3606489505349	<b>IMT22022</b>
			2	RU, RO, KK, PL	3606489505363	<b>IMT22024</b>
			2	EN	3606480476112	<b>IMT37495</b>
Cable gland M20	Grey	Ø28/40	5	EN, FR, ES, PT	3606489505394	<b>IMT22027</b>
			2	RU, RO, KK, PL	3606489505417	<b>IMT22029</b>
			5	EN, FR, ES, PT	3606489505448	<b>IMT22032</b>
			5	EN, FR, ES, PT	3606489505455	<b>IMT22033</b>
			5	EN, FR, ES, PT	3606489505462	<b>IMT22034</b>
			5	EN, FR, ES, PT	3606489505479	<b>IMT22035</b>
Cable gland M25	Grey	Ø35/46	5	RU, RO, KK, PL	3606489505486	<b>IMT22036</b>
			5	EN, FR, ES, PT	3606489505509	<b>IMT22038</b>
			5	EN, FR, ES, PT	3606489505516	<b>IMT22039</b>
Cable gland M32	Grey	Ø46/55	5	EN, FR, ES, PT	3606489505264	<b>IMT22014</b>
			5	RU, RO, KK, PL	3606489505271	<b>IMT22015</b>

P:00228



P:148429



<sup>1)</sup>When ordering, the Ref. No. implies the quantity one (1). Each Ref. No. includes the quantities stated in this document.



P147854-3k.eps

Digital multimeter - category III - 600 V

Description

- Digital multimeter equipped with a backlit screen and a data hold function
- DC voltage range: 0.2/2/20/200/600 V
- AC voltage range: 200/600 V
- DC current: 0.2 mA/2 mA/20 mA/200 mA/10 A
- Resistance: 200 Ω/2 kΩ/20 kΩ/200 kΩ/2 MΩ
- Continuity: yes, under 100 Ω
- Battery test: yes, 1.5 V (AA, AAA and button cell) and 9 V
- Electrical insulation: IEC 61010 Cat III 600 V
- Fused by 250 mA and 10 A fast fuse
- Power: 9 V battery
- Weight: approx. 290 g (with battery).

Application

- A high specification digital multimeter, designed to measure voltage, current and resistance.

+ Benefits

- Low battery indicator
- High precision measure
- Backlight and hold result mode
- Built in stand allows handsfree operations

Range

	Type (language of packaging and instructions)	Size mm (HxWxT)	Ref. No.
	Digital multimeter (French, Spanish, German, Portuguese, Polish, English)	150x90x40	IMT23222

P147851



P147825-10.eps

Digital multimeter - category III - 300 V

Description

- Digital multimeter equipped with a backlit screen and a data hold function
- DC voltage range: 0.2/2/20/200/300 V
- AC voltage range: 0.2/2/20/200/300 V
- DC/AC current: 20 mA/200 mA/10 A
- Resistance: 200 Ω/2 kΩ/20 kΩ/200 kΩ/2 MΩ/20 MΩ
- Continuity: yes, under 100 Ω
- Temperature: 0...1000°C
- Battery test: yes, 1.5 V (AA, AAA and button cell) 9 V and 12 V
- Electrical insulation: IEC 61010 Cat III, 300 V
- Fused by 250 mA and 10 A fast fuse
- Power: 9 V battery
- Weight: approx. 290 g (with battery).

Application

- A highly specified digital multimeter designed to measure voltage, current, resistance, diode, continuity, battery power and temperature.

+ Benefits

- Low battery indicator
- Non-contact AC voltage detection
- Live AC wire detection
- Backlight and hold result mode
- Built in stand allows handsfree operations

Range

	Type (language of packaging and instructions)	Size mm (HxWxT)	Ref. No.
	Digital multimeter (English, Danish, Finnish, Norwegian & Swedish)	165x85x39	IMT23102
	Digital multimeter (French, Spanish, German, Portuguese, Polish)	165x85x39	IMT23202

P147842







P147824-10 eps

**+ Benefits**

- LCD and sound signal indicate findings
- 2 meter measure tape inside
- Pencil slider, pencil hole
- Whole alarm icon: when detects an edge of object, the icon appears as an indicator
- Spotlight & groove: press when detects an object, the spotlight appears and mark in the groove position
- Mark button: press this button to mark dots on the wall surface

**Multipurpose digital detector**

**Description**

- Detection depth
- Stud mode: wood stud of 30×30 mm at depth of ≤ 14 mm
- Metal mode: iron pipe of Ø 20 mm at depth of ≤ 25 mm
- AC mode: 50 mm for 90...250 V at 50...60 Hz
- Power: 9 V battery (6F22)
- Weight: approx. 213 g (with battery)
- Always calibrate before each use.

**Application**

- This unit is an advanced detector. It can detect and locate metal, AC voltage and stud. It can be used in construction, fitment, etc.

Range			
	Type (language of packaging and instructions)	Size mm (HxWxT)	Ref. No.
P147840	<b>Multipurpose digital detector</b> (English, Danish, Finnish, Norwegian & Swedish)	180x73x32	<b>IMT23104</b>
	<b>Multipurpose digital detector</b> (French, Spanish, Portuguese, Polish, Hungarian)	180x73x32	<b>IMT23204</b>



P147827-10 eps

**+ Benefits**

- Find the stud centre, find wood and metal studs, AC scanning to trace hot wire
- Metal scanning for finding nail, pipe, rebar, and other hidden metallic object
- Signal indication: when detects an edge of object, the top signal LED lights as an indicator
- Spotlight & groove: when detects an object, the spotlight appears and mark in the groove position

**3-in-1 detector**

**Description**

- Detection depth
- Stud mode: wood stud of 30×30 mm at depth of ≤ 18 mm
- Metal mode: iron pipe of Ø 25 mm at depth of ≤ 30 mm
- AC mode: 50 mm for 90...250 V at 50...60 Hz
- Power: 9 V battery (6F22)
- Weight: approx. 165 g (with battery)
- Always calibrate before each use.

**Application**

- This unit is an advanced detector. It can be used in construction, fitment, carpentry, etc.

Range			
	Type (language of packaging and instructions)	Size mm (HxWxT)	Ref. No.
P147836	<b>3 in 1 detector</b> (English, Danish, Finnish, Norwegian & Swedish)	150x66x32	<b>IMT23105</b>





P147822-10 eps

**Multifunction cable tracer**

**Description**

- The transmitter is a compact hand-held instrument used for electricians to detect and track circuits into wall. Very useful when you need to repair an old electrical circuit
- Must be used when electrical circuits are switched off
- Unenergized electrical wires
- Slim ergonomic receiver receptor
- Telephone lines
- Coaxial cables
- Two crocodile clips
- DC automotive wires
- Power: 1.5 V (LR41/SR41) x4 (R)
- Power: 1.5 V (AAA) x2 (T)
- Weight: approx. 220 g (with battery).

**Application**

- Designed to generate a distinct tone in any unenergized wire or cable. This tone can be picked up with the tracker receiver. An LED acts as a visual indicator to show that the unit is on.



**Benefits**

A multifunction device comprising of a transmitter and remote receiver  
Audible Tracking

Range			
	Type (language of packaging and instructions)	Size mm (HxWxT)	Ref. No.
<p>P147831</p>	<b>Multifunction cable tracer</b> (English, Danish, Finnish, Norwegian & Swedish)	183x80x46	<b>IMT23106</b>
	<b>Multifunction cable tracer</b> (French, Spanish, German, Portuguese, Polish, Hungarian)	183x80x46	<b>IMT23206</b>



P147823-10 eps

**Infrared thermometer**

**Description**

- Hand-held digital infrared thermometer for surface temperature measurement.
- Backlight LCD
- Laser pointer
- Temperature range: -20...520°C (-4...968°F)
- Power: 9 V battery
- Weight: approx. 150 g (without battery).

**Application**

- A variety of non-contact thermo measurement application, including:
  - automotive
  - BBQ's
  - radiator electrical installations
  - cable wires.



**Benefits**

Infrared laser measurement  
LCD readout display  
Complete with hand lanyard and batteries

Range			
	Type (language of packaging and instructions)	Size mm (HxWxT)	Ref. No.
<p>P147832</p>	<b>Infrared thermometer</b> with LCD readout display (English, Danish, Finnish, Norwegian & Swedish)	180x85x50	<b>IMT23107</b>
	<b>Infrared thermometer</b> with LCD readout display (French, Spanish, German, Portuguese, Polish, Hungarian)	180x85x50	<b>IMT23207</b>



P147830-10 eps

## + Benefits

- Compact size, portable
- Fast operation
- Accuracy
- Easy one-touch operation
- °C/°F unit exchange
- 2 pin steel probe
- Low battery indication
- Automatic power-off feature

## Moisture meter

### Description

- It can measure moisture level and the ambient temperature. Drive the probes into the wood, wall or material to be measured.
- LED indication.
- Digital LCD display with backlight
- Range of wood: 6...60 %
- Range of building material: 0.2...2.9 %
- Environment temperature: 0...40°C (32...99°F)
- Power: 1.5 V battery, LR44 or equivalent, 4 pieces
- Weight: approx. 41 g (with batteries).

### Application

- It can be used to measure the moisture level in sawn timber (also cardboard, paper) and hardened materials (plaster, concrete and mortar). It displays the moisture level in the material straightaway. In addition, it can measure the ambient temperature.

### Range

	Type (language of packaging and instructions)	Size mm (HxWxT)	Ref. No.
P147830	<b>Moisture meter</b> (English, Danish, Finnish, Norwegian & Swedish)	85x45x16	<b>IMT23108</b>
	<b>Moisture meter</b> (French, Spanish, Polish, German, Hungarian)	85x45x16	<b>IMT23208</b>



P147830



P147828-10 eps

## + Benefits

- Audible and visual confirmation: LED illumination offers peace of mind in a noisy environment
- Ergonomic hand-held design
- Bright torch function
- Low battery indication
- Tactile barrier for safety

## Voltage detector pen

### Description

- A compact voltage testing device with both audible and visual (bright LED) indication if voltage is present in the circuit
- AC voltage range: 5...1000 V
- Frequency range: 50...400 Hz
- Electrical Insulation: Cat IV, 1000 V
- Illumination function included - can double as a torch
- Adjustable detection sensitivity
- Power: 1.5 V AAA battery, 2 pieces
- Weight: approx. 50 g (with batteries).

### Application

- In just a few seconds, a technician can determine if it's safe to work around areas like:
  - transformer cases and circuit breaker housings, power ground wires or newly-driven ground rods, mobile homes, metallic siding or metal framing pedestals, crossboxes or conduit, street light fixtures or electrical machinery.

### Range

	Type (language of packaging and instructions)	Size mm (HxWxT)	Ref. No.
P147827	<b>Voltage tester pen</b> (English, Danish, Finnish, Norwegian & Swedish)	152x32x28	<b>IMT23109</b>
	<b>Voltage tester pen</b> (French, Spanish, German, Portuguese, Polish, Hungarian)	152x32x28	<b>IMT23209</b>



P147827





P147828-10.eps

### Compact multimeter - category III

#### Description

- Digital multimeter provides excellent reading of the basic electrical measurements
- DC voltage range: 2/20/200/300 V
- AC voltage range: 2/20/200/300 V
- DC current: 200 mA
- Resistance range: 2 kΩ/20 kΩ/200 kΩ/2 MΩ
- Continuity: yes under 50 Ω
- Battery test: none
- Electrical insulation: Cat III, 300 V
- Fused by 250 mA fuse
- Power: 12 V battery included
- Weight: approx. 110 g (with battery).

#### Application

- A pocket sized digital multimeter to measure voltage, current and resistance.



### Benefits

- Low battery indicator
- Integral test leads
- Ergonomic design: can be used hands free.

### Range

Type (language of packaging and instructions)	Size mm (HxWxT)	Ref. No.
<b>Compact digital multimeter</b> (English, Danish, Finnish, Norwegian & Swedish)	120x75x18	<b>IMT23112</b>
<b>Compact digital multimeter</b> (French, Spanish, German, Portuguese, Polish, Hungarian)	120x75x18	<b>IMT23212</b>

P147843



P147826-10.eps

### Analogue multimeter - category III

#### Description

- Traditional analogue meter using a needle gauge
- DC voltage range: 12/60/120/300 V
- AC voltage range: 12/60/300 V
- DC current: 0.6/12/600 mA
- Resistance: x10 Ω/x1 kΩ
- Decibel: -20...23 dB
- Continuity: yes, under 20 Ω
- Battery test: yes, 1.5 V (AA, AAA and button cell) and 9 V
- Electrical insulation: Cat III, 300 V
- Fused by 500 mA fuse
- Power: 1.5 V AA battery
- Weight: approx. 275 g (without battery).

#### Application

- A traditional analogue multimeter using a needle gauge to measure Voltage, Current and Resistance. Able to work into high humid zone < 85 %.



### Benefits

- Quick view
- Safe in high humidity area
- Able to use with hands free

### Range

Type (language of packaging and instructions)	Size mm (HxWxT)	Ref. No.
<b>Analogue multimeter</b> (English, Danish, Finnish, Norwegian & Swedish)	140x75x50	<b>IMT23113</b>
<b>Analogue multimeter</b> (French, Polish, Hungarian)	140x75x50	<b>IMT23213</b>

P147834





P147853-34 eps

## Digital clamp meter - category III - 600 V

### Description


- A compact 3½ digit autorange digital clamp meter designed to measure DC and AC voltage, AC current, resistance, diode and continuity
- DC voltage range: 0.2/2/20/200/600 V
- AC voltage range: 2/20/200/600 V
- AC current: 2/20/200/600 A
- Resistance: 200 Ω/2 kΩ/20 kΩ/200 kΩ/2 MΩ/20 MΩ
- Continuity: yes, under 30 Ω
- Diode check: approx. 1.5V
- Electrical insulation: IEC 61010 Cat III, 600 V
- Power: 3 V button cells, 2 pieces
- Weight: approx. 160 g (with battery).

### Application

- For commercial, industrial and residential troubleshooting. Power panel, junction box and battery bank monitoring, AC/DC motor testing, electrical testing on non-linear loads, etc.

## + Benefits

- Compact and easy to use
- Data hold function
- Audible continuity
- Low battery indicator
- High precision measuring
- Tactile barrier for safety

Range			
	Type (language of packaging and instructions)	Size mm (HxWxT)	Ref. No.
	<b>Digital clamp meter</b> (English, Danish, Finnish, Norwegian & Swedish)	190x76x36	<b>IMT23114</b>
	<b>Digital clamp meter</b> (French, Spanish, German, Portuguese, Polish, Hungarian)	190x76x36	<b>IMT23214</b>

P147860



## + Benefits

- Provides a true ground error indication through the LCD
- Quick recognition of dangerous voltage being present at the protective earth
- Use of three neon indicators provides rapid detection of correct /incorrect wiring
- Provides fast and effective RCD test function


### British standard socket tester

#### Description

- It is equipped with an additional RCD tester for testing the operation of RCD whose rating is not more than 30 mA
- In conjunction with the coding table provided, combined indicators indicate the true status of the wiring condition
- A clear indication of a PE-error will be shown on the LCD if dangerous contact voltage is present at PE (ground)
- Nominal voltage: 220 V ±10 %
- Frequency range: 50...60 Hz
- Measurement category: Cat III, 300 V
- RCD-test time: 60...300 ms
- Contact voltage threshold: (< 35 V AC against ground depending on coupling to earth)
- RCD test current: 30 mA ±15 %
- Weight: approx. 70 g.

#### Application

- This socket tester can be used to determine whether socket wiring is correct or incorrect.

Range			
	Type (language of packaging and instructions)	Size mm (HxWxT)	Ref. No.
	<b>BS socket tester</b> British plug	77x67x66	<b>IMT23103</b>





P147650-30.eps

## Thorsman cable reels

### Description

- Wide range of cable reels applicable with various applications for indoor and outdoor uses
- The range designed along innovative ergonomic lines with versatile features that offer superior comfort and smart functionality such as LED indicator, ergonomic handles for easy carrying and winding, safety thermal cut-out and fixed drum (for part of the models).

### Application

- Thorsman cable reels could be used in any place, at any moment by any one. It's a reliable solution for all your at-home or on site needs
- Schneider Electric cable reels are the perfect choice for professional and DIY users.

## + Benefits

- Ergonomic design for easy carrying and winding
- Fixed drum to prevent the tangling of wires
- Led indicator to quickly and easily indicate and inform the user if the power is switched on
- Plug holder to prevent the cable from unwinding or snagging by keeping the plug fixed to the reel
- High performance cable HO7 RNF
- NF EN 61242

## Thorsman cable reels

Compact-30



Model/Type	Cable specification	Cable length (m)	IP	IK	Socket/Plug type	Ref. No.
Compact	HO5 VVF 3G1.0	15	20	-	Schuko	IMT33135
	HO5 VVF 3G1.5	15	20	-	Schuko	IMT33137
	HO5 VVF 3G1.5	15	44	-	Schuko	IMT33136
	HO5 VVF 3G1.0	15	20	-	DK	IMT33138
	HO5VVF 3G1.5	15	20	-	Contour	IMT33139

Classic-37



Classic	HO5 VVF 3G1.5	20	20	-	Schuko	IMT33140
	HO5VVF 2x1.0	25	20	-	DK	IMT33141
	HO5VVF 3G1.5	20	20	-	Contour	IMT33142
	HO5 VVF 3G1.25	25	20	-	BS 230V	IMT33143
	HO5 VVF 3G1.5	25	44	-	BS 110V	IMT33144
	HO5VVF3G1,5	25	44	-	Contour	IMT33145
	HO5 VVF 3G1.5	25	20	-	BS 230 V-RCD	IMT33146

Extended-35



Extended	HO5 VVF 3G1.5	25	44	-	Schuko	IMT33151
	HO5 VVF 2G1.0	40	20	-	DK	IMT33152
	HO7 RNF 3G2,5	25	44	-	Contour	IMT33153
	HO5 VVF 3G1.5	25	44	-	Contour	IMT33154

Advanced-34



Advanced	HO5 VVF 2G1.0	40	20	08	DK	IMT33160
	HO5 VVF 3G1.5	40	44	08	Contour	IMT33156
	HO5 VVF 3G1.25	50	20	08	BS 230 V	IMT33157
	HO7 RNF 3G2,5	25	44	08	Contour	IMT33150

Professional-34



Professional	HO7 RNF 3G1.5	25	44	08	Schuko	IMT33147
	HO7 RNF 3G2.5	25	44	08	Schuko	IMT33148
	HO7 RNF 3G1.5	25	44	08	DK	IMT33149
	HO7 RNF 3G1.5	40	44	08	Schuko	IMT33158
	HO7 RNF 3G1.5	40	44	08	Contour	IMT33161
	HO7 RNF 3G1.5	40	44	08	DK	IMT33155



THP52659-105.eps

## LED Floodlights

### Description

The LED Floodlight range has been designed to offer more features and to cover a maximum number of applications thanks to its different sizes and its wide range of power.

All products in the range are equipped with the latest Led technology to offer better energy efficiency, higher light quality and a longer lifetime.

Mureva Light are not provided with any plug.

### Application

Due to its high IP rating, the Mureva Light range is suitable to be installed in all types of weather conditions, indoor or outdoor.

Mureva Light range provides a superior quality of light and reliability. These LEDs are optimized for the most cost sensitive applications, helping to ensure highly competitive system lumen per dollar (W) performance while addressing the stringent efficacy and reliability standards required for modern lighting applications, well suited for both commercial and residential lighting applications.

## + Benefits

- Easy Installation and mounting thanks to the bracket position
- Can be used in tough weather conditions, in and outdoor
- Can be hang and mount in all types of walls, or to be use on a Tripod
- Efficient LED technology: 100 lm/W
- High performance of LED chip: life time 50,000 h
- Never gets hot

### Technical data






- Beam angle: 110°
- Color Rendering Index (CRI): 80
- Lifetime: 50,000 hours
- Operation temperature: -30°C to +45°C.



### Certificates



## Range

Mureva FL, 230 V	Type	Color temperature	Plug	Power	Lumen	Cable	IP	Weight	Ref. No.
	Mureva FL 20 W	4000 K	-	20 W	2,000 lm	0.5 m H05RN-F 3G1.0	IP65	530 g	IMT47208
	Mureva FL 20 W	6500 K	-	20 W	2,000 lm	0.5 m H05RN-F 3G1.0	IP65	530 g	IMT47209
	Mureva FL 30 W	4000 K	-	30 W	3,000 lm	0.5 m H05RN-F 3G1.0	IP65	780 g	IMT47210
	Mureva FL 30 W	6500 K	-	30 W	3,000 lm	0.5 m H05RN-F 3G1.0	IP65	780 g	IMT47211
	Mureva FL 50 W	4000 K	-	50 W	5,000 lm	0.5 m H05RN-F 3G1.0	IP65	1020 g	IMT47212
	Mureva FL 50 W	6500 K	-	50 W	5,000 lm	0.5 m H05RN-F 3G1.0	IP65	1020 g	IMT47213
	Mureva FL 100 W	4000 K	-	100 W	10,000 lm	0.5 m H05RN-F 3G1.0	IP65	1950 g	IMT47214
	Mureva FL 100 W	6500 K	-	100 W	10,000 lm	0.5 m H05RN-F 3G1.0	IP65	1950 g	IMT47215
	Mureva FL 150 W	6500 K	-	150 W	15,000 lm	0.5 m H05RN-F 3G1.0	IP65	4050 g	IMT47222
	Mureva FL 200 W	6500 K	-	200 W	20,000 lm	0.5 m H05RN-F 3G1.0	IP65	4900 g	IMT47223
	Mureva FL 300 W	6500 K	-	300 W	30,000 lm	0.5 m H05RN-F 3G1.0	IP65	7640 g	IMT47224
	<b>Mureva FL, 120 V</b>								
	Mureva FL 30 W	4000 K	-	30 W	3,000 lm	0.5 m H05RN-F 3G1.0	IP65	780 g	IMT47234
	Mureva FL 50 W	4000 K	-	50 W	5,000 lm	0.5 m H05RN-F 3G1.0	IP65	1020 g	IMT47235
	Mureva FL 100 W	4000 K	-	100 W	10,000 lm	0.5 m H05RN-F 3G1.0	IP65	1950 g	IMT47236
<b>Mureva FL, IR Sensor 230 V</b>									
	Mureva FL 20 W	4000 K	-	20 W	2,000 lm	0.5 m H05RN-F 3G1.0	IP44	570 g	IMT47216
	Mureva FL 20 W	6500 K	-	20 W	2,000 lm	0.5 m H05RN-F 3G1.0	IP44	570 g	IMT47217
	Mureva FL 30 W	4000 K	-	30 W	3,000 lm	0.5 m H05RN-F 3G1.0	IP44	820 g	IMT47218
	Mureva FL 30 W	6500 K	-	30 W	3,000 lm	0.5 m H05RN-F 3G1.0	IP44	820 g	IMT47219
	Mureva FL 50 W	4000 K	-	50 W	5,000 lm	0.5 m H05RN-F 3G1.0	IP44	1060 g	IMT47220
	Mureva FL 50 W	6500 K	-	50 W	5,000 lm	0.5 m H05RN-F 3G1.0	IP44	1060 g	IMT47221
<b>Mureva FL, IR Sensor 120 V</b>									
	Mureva FL 50 W	4000 K	-	50 W	5,000 lm	0.5 m H05RN-F 3G1.0	IP44	1060 g	IMT47237



P150396-ajpneu\_2482.eps

## LED Worklamps

### Description

The Thorsman LED Worklamp range offers more features and covers a maximum number of applications, thanks to its different models. All products in the range are equipped with the latest LED technology, to offer greater energy efficiency, higher light quality, and a longer lifetime.

### Application

The high IP and IK rating makes this worklamp ideal for harsh conditions both indoors and outdoors. The built-in light dimmer function makes it possible to adjust the light in five different steps according to the work task. A socket outlet on the back for extra power connectivity. The built-in Type A and Type C USB outlet to charge mobile devices. Cable management to store the power cable and helps to prevent cable damage. Patented suspension strap and the angle-adjustable handle make it easy to transport, carry, place, mount or hang. Perfect for professional craftsmen.

## + Benefits

- Ergonomic & easy to transport, position, and mount
- Carry a handle and strap
- 3 to 5-meter length power cable enhanced the flexibility at worksite
- Ideal for harsh conditions: designed and approved for heavy use, both indoors and outdoors
- Shock-absorbent rubber coating
- Efficient LED technology: ultra long-life
- 5-step dimming
- 2-port A+C USB charger
- A socket outlet for extra power connectivity
- Cable clip and cable management to store and protect the power cable when not used
- Long operation time from 2 hours up to 8 hours, depends on light level output (IMT47279)

## Accessories

### Description

The Thorsman Worklamp Tripod is designed to bring even more flexibility and better light distribution to projects and applications. This tripod can be placed on any surface by adjusting the three legs, the bracket can be fixed using a screw on top of the tripod. The Thorsman Tripod and Bracket are suitable for Thorsman worklamps.

## Range

2-Pin Plug w/o Earth	Type	Plug	Power	Lumen	Cable	IP	Weight	Ref. No.
	Thorsman 18 W	2-Pin plug	18 W	2100 lm	3 m	IP65	1120	IMT47270







Schuko Socket	Type	Plug	Power	Lumen	Cable	IP	Weight	Ref. No.
	Thorsman 35 W	Hybrid E/F (CEE 7/7) Plug	35 W	4000 lm	3 m	IP54	2230	IMT47271
	Thorsman 55 W	Hybrid E/F (CEE 7/7) Plug	55 W	6800 lm	4 m	IP54	2700	IMT47272
	Thorsman 75 W	Hybrid E/F (CEE 7/7) Plug	75 W	8500 lm	5 m	IP54	3600	IMT47273







## Range

French Socket	Type	Plug	Power	Lumen	Cable	IP	Weight	Ref. No.
	Thorsman 35 W	Hybrid E/F (CEE 7/7) Plug	35 W	4000 lm	3 m	IP54	2230	IMT47274
	Thorsman 55 W	Hybrid E/F (CEE 7/7) Plug	55 W	6800 lm	4 m	IP54	2700	IMT47275
								

Danish Socket	Type	Plug	Power	Lumen	Cable	IP	Weight	Ref. No.
	Thorsman 35 W	Danish plug	35 W	4000 lm	3 m	IP54	2230	IMT47276
	Thorsman 55 W	Danish plug	55 W	6800 lm	4 m	IP54	2700	IMT47277
	Thorsman 75 W	Danish plug	75 W	8500 lm	5 m	IP54	3600	IMT47278
								

Rechargeable 2-Pin Plug w/o Earth	Type	Plug	Power	Lumen	Cable	IP	Weight	Ref. No.
	Thorsman 35 W Rechargeable	2-Pin plug	35 W	4000 lm	3 m	IP54	2420	IMT47279
								

## Accessories

Type	Ref. No.
 Thorsman Tripod and Bracket	IMT47281



## LED Worklights

### Description

The LED Thorsman Worklight range offers a simple and cost-effective solution for any workplace or area where a temporary light solution is required. All products in the range are equipped with the latest LED technology to offer greater energy efficiency, light quality and a longer lifetime. The Thorsman Worklight range comes in various plug standards.

### Application

Due to its high IP rating, the Thorsman light range is suitable for installation in all types of weather conditions, both indoors or outdoors. Perfect for all kind of professionals, as well as private uses such as camping, outdoor parties and more. Thorsman Worklights can be used anywhere and at any time.

### Thorsman WL, technical data

- Beam angle: 110°
- Color Rendering Index (CRI): 80
- Lifetime: 50,000 hours
- Operation temperature: -30°C to +45°C.

## + Benefits


- Ergonomic design: easy to transport and carry
- Multi-functional and flexible: can be used on the ground or hung
- Compact and easy to store
- Cable management: prevents cable damage when stored
- Can be used in harsh weather conditions, indoors and outdoors
- Efficient LED technology: 100 lm/W
- High performance of LED chip: lifetime 50,000 h
- Never gets hot



### Certificates



## Range

Thorsman WL, 230 V	Type	Color temperature	Plug	Power	Lumen	Cable	IP	Weight	Ref. No.
	Thorsman WL 20 W	4000 K	Contour	20 W	2,000 lm	3 m H05RN-F 3G1.0	IP65	850 g	IMT47225
	Thorsman WL 20 W	4000 K	Danish	20 W	2,000 lm	3 m H05RN-F 3G1.0	IP65	850 g	IMT47227
	Thorsman WL 30 W	4000 K	Contour	30 W	3,000 lm	3 m H05RN-F 3G1.0	IP65	980 g	IMT47226
	Thorsman WL 30 W	4000 K	Danish	30 W	3,000 lm	3 m H05RN-F 3G1.0	IP65	980 g	IMT47228

## Thorsman WL, 120 V

	Thorsman WL 30 W	4000 K	Canadian	30 W	3 000 lm	3 m H05RN-F 3G1.0	IP65	920 g	IMT47233
---	------------------	--------	----------	------	----------	-------------------	------	-------	----------



Hand light. Resistant, powerful and so handy

Head light. Work with 2 hands



USB recharge

Clip, always at your belt or pocket



Very strong magnet

Practical hook

Powerful

Adjustable powerful light

## + Benefits



- Multi-functional and flexible: can be used in different applications
- Adjustable: light can be projected at different angles
- Compact and easy to store
- Can operate in harsh weather conditions, indoors and outdoors (IMT47239)
- Motion detector for power saving (IMT47239)
- Flexible strap with comfortable head fitting: suitable for use on helmets as well
- Strong magnet to ensure attachment to metal surfaces (IMT47238)
- Efficient LED technology
- Long operation time (up to 8 hours)
- Never gets hot

### Thorsman rechargeable technical data

- Lithium battery 3.7 V:
  - IMT47238: 1500 mAh
  - IMT47239: 1600 mAh
- Operation temperature: -10°C to +40°C.
- Charging time:
  - IMT47238: 3 h
  - IMT47239: 4 h
- Operation time:
  - IMT47238: 8 h/4 h
  - IMT47239: 5 h/3 h.



### Range

Thorsman rechargeable	Type	Color temperature	Plug	Power	Lumen	Cable	IP	Weight	Ref. No.
 P148447-20.eps	Thorsman Mini Hand Light	6000-7000 K	USB	3 W	280 lm	1 m USB cable	IP20	175 g	IMT47238
 P148448-16.eps	Thorsman Head Light With motion detector	6000-7000 K	USB	3 W	250 lm	1 m USB cable	IP54	155 g	IMT47239





## + Benefits

- The cable ties are self-locking. They cannot be opened and re-sealed.
- The cable ties have smooth rounded edges for easier handling and safer installation.
- The bent rounded tip allows easier insertion through the head of the cable tie.
- User friendly re-sealable packaging and documented quality.
- Manufactured and tested to EN62275, RoHS compliant.



### Thorsman cable ties

#### Description

- Cable ties are used for a wide range of applications including bundle up and fix cables, conduits and tubing
- Material PA6.6
- Available in black and clear colour
- Max operating temperature -40°C to +85°C
- Minimum installation temperature -20°C.

#### Application

- There are two types of Thorsman cable ties available:
  - made of clear polyamide, for indoor use
  - made of UV-stabilized black polyamide for both indoor and outdoor use.

#### Thorsman cable ties (x 100)

Type	Length (mm)	Colour	Qty per package	Ref. No.	
<b>Thorsman cable ties</b>			<b>No language pack</b>		
2.5 mm	100	Clear	100	IMT46026	
		Black	100	IMT46033	
	120	Clear	100	IMT46035	
		Black	100	IMT46036	
	160	Clear	100	IMT46074	
		Black	100	IMT46073	
200	Clear	100	IMT46158		
	Black	100	IMT46157		
	3.6 mm	150	Clear	100	IMT46064
		Black	100	IMT46071	
200	Clear	100	IMT46149		
	Black	100	IMT46156		
300	Clear	100	IMT46921		
	Black	100	IMT46922		
4.8 mm	200	Clear	100	IMT46101	
		Black	100	IMT46118	
	250	Clear	100	IMT46918	
		Black	100	IMT46968	
	300	Clear	100	IMT46919	
		Black	100	IMT46969	
370	Clear	100	IMT46248		
	Black	100	IMT46970		
7.6 mm	300	Black	100	IMT46923	
	380	Clear	100	IMT46286	
		Black	100	IMT46293	
	8.8 mm	550	Clear	100	IMT46926
		Black	100	IMT46924	
		780	Black	100	IMT46927

#### Thorsman cable ties (x 20)

Type	Length (mm)	Colour	Qty per package	Ref. No.
<b>Thorsman cable ties</b>			<b>No language pack</b>	
2.5 mm	100	Black	20	IMT46231
		Clear	20	IMT46221
4.6 mm	200	Black	20	IMT46232
		Clear	20	IMT46222
4.8 mm	280	Black	20	IMT46233
		Clear	20	IMT46223
	380	Clear	20	IMT46224
		Black	20	IMT46234

#### Thorsman accessories

Type	Colour	Qty per package	Dimensions w/l (mm)	Ref. No.
Self -adhesive base for fixing of cable ties. There are two sizes base, one for max. tie width 3.6 mm and the other for max. tie width 4.8 mm. Both self-adhesives are using high-end 3M form. There are additional screw-fix option cradle for fixing cable tie and cable tie with identification and marking tab. Material: PA6.6				
<b>Self-adhesive bases</b>			<b>No language pack</b>	
For max. tie width 3.6 mm	Clear	100	19/19/5.8	IMT47000
For max. tie width 4.8 mm	Clear	100	28/28/6.4	IMT47001
<b>Cradle</b>				
For max. tie width 7.8 mm	Clear	100	22/16/9.6	IMT47002
<b>Cable tie with ID tab</b>				
Cable tie with ID tab 100 x 2.5 mm	Clear	100	100/2.5	IMT47004



P150375-layout\_2380.eps

## + Benefits

- Insensitivity to climatic stress and aging
- Performance preserved whatever the humidity rate
- High impact resistance at low temperature
- Resistance to tearing and elongation
- Halogen-free
- Can be used with conduits



P1484105-13.eps

### Mureva FIX cable ties PA12

#### Description

The Mureva FIX installation ties in PA12 are available in 4 versions of diameter (from 8 to 92 mm). The range also includes wall fixings accessories.

Designed to ensure a time-proof quality and security, they are insensitive to climatic stress (UV radiations, high temperatures, salt spray...), they possess an excellent resistance to tearing and elongation and a flame resistance matching the highest requirements.

#### Application

For all outside and inside installation as for installations in chemically aggressive environments (oils, fats, hydrocarbons, dilute acids, solvents...).

### Range

Type	Colour	Length (mm)	Qty per package	Ref. No.
------	--------	-------------	-----------------	----------

#### Installation cable ties PA12

Flatheaded installation ties of 9 mm width. The ties are available in 4 versions of tightening diameter, from 8-22 to 55-92 mm, and 3 versions of packaging, per 100, per 1000 and per 1000 with an included tightening tool (ref. NSYMARK3).

Material: PA12

Ø 8 - 22	Black	132	100	<b>ENN47922</b>
Ø 10 - 42	Black	194	100	<b>ENN47942</b>
	Black	194	1000	<b>ENN94242</b>
Ø 10 - 42 with tightening tool	Black	194	1000	<b>ENN94442</b>
	Black	273	100	<b>ENN47962</b>
Ø 26 - 62	Black	273	1000	<b>ENN94262</b>
	Black	370	100	<b>ENN47992</b>
Ø 55 - 92	Black	370	1000	<b>ENN94292</b>

#### Fixing accessories

Bases intended for the fixing of 9 mm width installation ties. They are resistant to UV and therefore recommended both for outside and inside use. Minimum resistance: 20 daN.

Thread of ref. ENN47995: Ø 7 x 150 mm.

Classic base	Black	100	<b>ENN47994</b>
Universal base	Black	100	<b>ENN47995</b>
Base with included plug	Black	10	<b>IMT47206</b>
		100	<b>IMT47006</b>

P122528



P122530 P151019 P151018



P138603-layout\_1016.eps

### Thorsman Rapstrap

#### Description

Rapstrap is a smooth and flexible installation tie to be used in many configurations. The unique design allows Rapstrap to be easily released and re-used as long as you have kept the ribbed tongue end. Just re-insert the tongue in the same cell and remove. Made of elasticated polyurethane, Rapstrap can stretch up to 50 %. Yet it ties securely without harming any sensitive surfaces.

#### Application

An easy way to quickly manage delicate cables, plants, or anything else you want tied up. For longer lengths, just join two Rapstraps together.

### Range

Type	Colour	Length (mm)	Qty per package	Ref. No.
------	--------	-------------	-----------------	----------

#### 4 sheets/6 strips

Packed in a plastic bag of 24 sheets of 6 strips.  
Material: Polyurethane.

Rapstrap tie SE, DK, NO, FI	Black	10/1.25/300	24	<b>IMT38067</b>
	Neutral	10/1.25/300	24	<b>IMT38070</b>
Rapstrap tie EN, FR, NL, ES, PT	Black	10/1.25/300	24	<b>IMT38068</b>
	Neutral	10/1.25/300	24	<b>IMT38071</b>
	Green	10/1.25/300	24	<b>IMT38072</b>

P140003



## + Benefits

- Rapstrap is a "green" product
- Just tie, cut and use again
- No part of Rapstrap is useless and no waste
- Just thread through a cell at the end of the strip, cut off the remaining front section and use again



### PVC insulation tape

#### Description

- Available in a range of sizes and colours
- Manufactured from flame retardant self extinguishing PVC to BS EN 60454
- Operating temperature: 0°C to +80°C
- Electrical breakdown: 5000 V.

#### Application

- Suitable for electrical insulation, binding, colour coding and general work.

### + Benefits

- Tested and approved to the following standards:
- EN60454-3-1/1:1998, EN60454-1:1994, EN60454-2:1995
- REACH Directive 1907/2006/EU compliant SVHC's < 0.1% and RoHS Directive 2011/65EU



P147852-10 eps



P147854-10 eps



P147856-10 eps

Range				
Product code	Description	Colour	Qty per package	Minimum order unit
<b>19 mm x 20 m</b>				
2420100	19 mm x 20 m	Red	8	8
2420101	19 mm x 20 m	Yellow	8	8
2420102	19 mm x 20 m	Blue	8	8
2420103	19 mm x 20 m	Black	8	8
2420104	19 mm x 20 m	White	8	8
2420105	19 mm x 20 m	Yellow/green	8	8
2420106	19 mm x 20 m	Green	8	8
2420107	19 mm x 20 m	Brown	8	8
2420108	19 mm x 20 m	Grey	8	8
<b>19 mm x 33 m</b>				
2420110	19 mm x 33 m	Red	8	8
2420111	19 mm x 33 m	Yellow	8	8
2420112	19 mm x 33 m	Blue	8	8
2420113	19 mm x 33 m	Black	8	8
2420114	19 mm x 33 m	White	8	8
2420115	19 mm x 33 m	Yellow/green	8	8
2420116	19 mm x 33 m	Brown	8	8
2420117	19 mm x 33 m	Green	8	8
2420118	19 mm x 33 m	Grey	8	8
<b>50 mm x 33 m</b>				
2420300	50 mm x 33 m	Red	3	3
2420301	50 mm x 33 m	Yellow	3	3
2420302	50 mm x 33 m	Blue	3	3
2420303	50 mm x 33 m	Black	3	3
2420304	50 mm x 33 m	White	3	3
<b>Mixed bundle</b>				
IMT38215	19 mm x 20 m	Red, black, white	3	1
IMT38216	19 mm x 20 m	Black, green/yellow, brown	3	1
IMT38217	19 mm x 20 m	Red, black, white, green/yellow, blue	5	1

# Trailing leads

## French pin trailing leads



P147614\_15.eps

### Trailing leads

#### Description

- Available in 3 or 5 socket outlets selection, with different cable lengths and finishing
- Manufactured from flame retardant PP or PC material
- Operating temperature: -10°C to +40°C
- Switch with neon indicator
- Degree of protection: IP20
- Cable size: 1 mm<sup>2</sup>
- Rated operational voltage (Ue): 250 V AC
- Rated current (In): 16 A
- Hanger holes
- Outlet poles configuration: 2P+E.

#### Application

- Suitable for indoor use in everyday household and commercial building.

### + Benefits

Tested and approved to the following standards:

Target market	France, Poland, Finland, Sweden, Spain and Portugal	Russia
Standard	Socket: IEC 60884-2-7  Socket with USB charging: IEC 60884-2-7 EN 60950-1 EN 55022 EN 55024 EN 61000-6-1 EN 61000-6-3	Socket: GOST 30851.1.2.3-2012  Socket with USB charging: GOST 30851.2.3-2012 GOST 30805.14.1-2013 GOST 30805.14.2-2013 GOST 30804.3.2-2013 GOST IEC 61000-3-3-2015



STENGER\_C007\_AG7\_20.eps

### French trailing leads

Type	Socket	Cable length (m)	Colour	Dimensions A/B/C (mm)	Qty per package	Ref. No.
<b>French trailing leads</b>						
Selection of 3 and 5 socket outlets in anthracite and white colors, available in 1.5 m, 3 m and 5 m cable lengths. All designed with child-protection shutter and general on/off switch to ensure safety and energy saving. Compliant to NF, BBJ and CE. Material: PP						
3 gang extension cord	3	1.5	White	57/41/206	1	<b>ST9331W</b>
			Anthracite			<b>ST9331B</b>
5 gang extension cord	5	1.5	White	57/41/291	1	<b>ST9351W</b>
			Anthracite			<b>ST9351B</b>
3 gang extension cord	3	3	White		1	<b>ST9353W</b>
			Anthracite			<b>ST9353B</b>

P147613



P147614



P147615



P147616



P147617



P147618










# Trailing leads

## French pin trailing leads












### French trailing leads with 2 USB ports

Type	Socket	Cable length (m)	Colour	Dimensions A/B/C (mm)		Qty per package	Ref. No.							
<b>French trailing leads with 2 USB ports</b>														
Selected models are embedded with USB charging ports, which are up to 2.4 A max capacity and suitable for charging tablets (or other electronic devices) at 2.1 A per port. Available in real material finishing extended from existing Schneider wiring devices range Odace.														
Compliant to NF, BBJ and CE.														
USB output: 5 V DC, 2.4 A max.														
Material: PC / PP / Wood / Aluminum.														
	3 gang extension cord with USB	3	1.5	White		1	<b>ST933U1W</b>							
				Anthracite			1	<b>ST933U1B</b>						
				White/ aluminium brosse			1	<b>ST933U1WA</b>						
				White/ bronze brosse			1	<b>ST933U1WB</b>						
				White/bois nordique			1	<b>ST933U1WC</b>						
				Anthracite/ aluminium brosse			1	<b>ST933U1BA</b>						
				Anthracite/ bronze brosse			1	<b>ST933U1BB</b>						
							5 gang extension cord with USB	5	1.5	White		1	<b>ST935U1W</b>	
										Anthracite			1	<b>ST935U1B</b>
										White/ aluminium brosse			1	<b>ST935U1WA</b>
Anthracite/ bronze brosse	1	<b>ST935U1WB</b>												
White/bois nordique	1	<b>ST935U1WC</b>												
Anthracite/ aluminium brosse	1	<b>ST933U1BA</b>												
Anthracite/ bronze brosse	1	<b>ST935U1BB</b>												

# Trailing leads

## Schuko pin trailing leads

### Schuko trailing leads


Type	Socket	Cable length (m)	Colour	Dimensions A/B/C (mm)		Qty per package	Ref. No.	
<b>Schuko trailing leads</b>								
Selection of 3 and 5 socket outlets in anthracite and white colors, available in 1.5 m, 3 m and 5 m cable lengths. All designed with child-protection shutter and general on/off switch to ensure safety and energy saving. All compliant to CE and selected models certified with SEMKO, FIMKO, AENOR or EAC. Material: PP.								
 P147619  P147620  P147621  P147622  P147623  P147624  P147625  P147626  P147627  P147628	3 gang extension cord	3	1.5	White	57/41/206	1	<b>ST9431W</b>	
				Anthracite			1	<b>ST9431B</b>
			3	White			1	<b>ST9433W</b>
				Anthracite			1	<b>ST9433B</b>
			5	White			1	<b>ST9435W</b>
	5 gang extension cord	5	1.5	White	57/41/291		1	<b>ST9451W *</b>
				Anthracite			1	<b>ST9451B *</b>
			3	White			1	<b>ST9453W</b>
				Anthracite			1	<b>ST9453B *</b>
			5	White			1	<b>ST9455W</b>

(\*) Not EAC compliant

# Trailing leads

## Schuko pin trailing leads

### Schuko trailing leads with 2 USB ports

Type	Socket	Cable length (m)	Colour	Dimensions A/B/C (mm)		Qty per package	Ref. No.
------	--------	------------------	--------	-----------------------	---	-----------------	----------













#### Schuko trailing leads with 2 USB ports

Selected models are embedded with USB charging ports, which are up to 2.4 A max capacity and suitable for charging tablets (or other electronic devices) at 2.1 A per port. Available in real material finishing extended from existing Schneider wiring devices range Odace.

All compliant to CE and selected models certified with SEMKO, FIMKO, AENOR or EAC.

Output voltage: 5 V DC. Output current: 2.4 A.

Material: PC / PP / Aluminum.

P147521		3	1.5	White	57/41/254	1	ST943U1W *
P147539				Anthracite		1	ST943U1B *
P147595		3		White		1	ST943U3W
P147629				Anthracite		1	ST943U3B
P147520				White/ aluminium brosse		1	ST943U1WA *
P147541				Anthracite/ aluminium brosse		1	ST943U1BA *
P147525		5	1.5	White	57/41/291	1	ST945U1W *
P147540				Anthracite		1	ST945U1B *
P147529				White/ aluminium brosse		1	ST945U1WA *
P147571				Anthracite/ aluminium brosse		1	ST945U1BA *
P147630			3	White		1	ST945U3W
P147631				Anthracite		1	ST945U3B *

(\*) Not EAC compliant

# Trailing leads Desk Unit range

## Desk Unit XS



Desk Unit XS with DE std socket outlet



Desk Unit XS with DE std socket outlet and USB type A



Desk Unit XS with USB type A and USB type C



Transparent lid



Holesaw

## Desk Unit XS

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
<b>Desk Unit XS</b>					
Desk Unit to be flush mounted into a Ø 60 mm diameter hole in the desk. Available in different combinations of power, USB, or power and USB. Prewired unit with 2 meters cable and plug for direct connection to power. Comes with a locking ring for safe mounting in the desk. Easy and ergonomic access at arm length.					
Desk Unit XS with DE std socket outlet	White	PC	Ø 84/63	1	<b>INS44000</b>
	Anthracite	PC	Ø 84/63	1	<b>INS44001</b>
Desk Unit XS with FR std socket outlet	White	PC	Ø 84/63	1	<b>INS44002</b>
	Anthracite	PC	Ø 84/63	1	<b>INS44003</b>
Desk Unit XS with DE std socket outlet and USB type A	White	PC	Ø 84/63	1	<b>INS44004</b>
	Anthracite	PC	Ø 84/63	1	<b>INS44005</b>
Desk Unit XS with FR std socket outlet and USB type A	White	PC	Ø 84/63	1	<b>INS44006</b>
	Anthracite	PC	Ø 84/63	1	<b>INS44007</b>
Desk Unit XS with USB type A and USB type C	White	PC	Ø 84/63	1	<b>INS44008</b>
	Anthracite	PC	Ø 84/63	1	<b>INS44009</b>
<b>Transparent lid</b>					
Transparent lid as accessory for Desk Unit XS equipped with power socket outlet and/or USB socket outlet. Serves as socket outlet protection against dust and liquids. The desk Unit XS and transparent lid reaches protection degree IP42. Visibility and intuitive use due to transparency.					
Transparent lid	Transparent	Transparent PC	Ø 84/7	1	<b>INS44031</b>
<b>Desk Unit XS</b>					
Desk Unit XS for wireless charging to be flush mounted into a Ø 60 mm diameter hole in the desk. Unit with 2 meter cable and USB type A for direct connection to socket USB 3.0 or power charger. The wireless charger has protection degree IP44 and is Qi certified. Input USB DC 5 V/2 A. Comes with a locking ring for safe mounting in the desk. Easy and ergonomic access at arm length.					
Desk Unit XS for wireless charging	Anthracite	PC	Ø 84/63	1	<b>INS44010</b>
<b>Holesaw</b>					
Holesaw to drill a Ø 60 mm diameter hole in the desk. Suitable to prepare for mounting of Desk Unit XS and cable grommet.					
Holesaw Ø 60 mm diameter	Black	Metal	Ø 60/114	1	<b>INS44030</b>

P148126



P148123



P148124



P148121



P148118



P148134



P148156



P148398





# Trailing leads

## Cable Management range

### Cable Management



Self-closing cable wrap Small (Ø 15 mm)



Self-closing cable wrap Large (Ø 40 mm)



Cable clamp

### Cable Management

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
<b>Floor cable</b>					
A cable guiding feeder on the floor. A flexible solution, solid to be stepped on, stretchable-prolongable (700-1000 mm), easy to enter and exit cables along the feeder, providing full cable protection. Feeders can be jointed if longer lengths needed. Additional mounting accessory with screws for under desk fixation.					
Floor cable feeder	Black	Plastic	24/90/700	1	<b>INS61200</b>
	Silver	Plastic	24/90/700	1	<b>INS61201</b>
Mounting accessory for Floor cable feeder	Black	Plastic	15/55/25	1	<b>INS61202</b>
<b>Self-closing cable wrap</b>					
A self-closing cable wrapable sleeve, to arrange cables on or under the table in an organized manner. Easy to put cables inside, and to exit cables along the sleeve. No extra tools needed.					
Self-closing cable wrap Small (Ø 15 mm)	Black	Synthetic fibre	Ø 15/2000	1	<b>INS61203</b>
Self-closing cable wrap Medium (Ø 30 mm)	Black	Synthetic fibre	Ø 30/2000	1	<b>INS61205</b>
Self-closing cable wrap Large (Ø 40 mm)	Black	Synthetic fibre	Ø 40/2000	1	<b>INS61207</b>
Self-closing cable wrap Large (Ø 40 mm)	White	Synthetic fibre	Ø 40/2000	1	<b>INS61208</b>
<b>Cable clamp</b>					
Cable clamps, fixed with adhesive tape, for routing small bundles of cables on or under desk. A simple way to arrange cables on desk or hide them under desk.					
Cable clamp	White	Plastic	19/85/18	5	<b>INS61209</b>
<b>Cable grommet</b>					
Grommets mounted in Ø 60 mm or Ø 80 mm diameter holes in the desk. For routing cables through the desk and help make the installation easy. Cover with adjustable swivel opening.					
Cable grommet Ø 80 mm	White	Plastic	Ø 94/25	2	<b>INS61211</b>
	Black	Plastic	Ø 94/25	2	<b>INS61212</b>
Cable grommet Ø 60 mm	White	Plastic	Ø 71/24	2	<b>INS61214</b>
	Black	Plastic	Ø 71/24	2	<b>INS61215</b>
Grommets mounted in Ø 60 mm or Ø 80 mm diameter holes in the desk. For routing cables through the desk and help make the installation easy. Cover with brush opening.					
Cable grommet Ø 80 mm	Anodized	Alu	Ø 89/15	1	<b>INS61210</b>
Cable grommet Ø 60 mm	Anodized	Alu	Ø 67/15	1	<b>INS61213</b>

P148204



P148203



P148303



P148333



P148321



P148316



P148322



**2420●●●**

2420100.....	36	IMT23208.....	24	IMT37462.....	10	IMT46970.....	34	ST933U1WC.....	38
2420101.....	36	IMT23209.....	24	IMT37466.....	10	IMT47000.....	34	ST935U1B.....	38
2420102.....	36	IMT23212.....	25	IMT37467.....	17	IMT47001.....	34	ST935U1BB.....	38
2420103.....	36	IMT23213.....	25	IMT37475.....	17	IMT47002.....	34	ST935U1W.....	38
2420104.....	36	IMT23214.....	26	IMT37476.....	17	IMT47004.....	34	ST935U1WA.....	38
2420105.....	36	IMT23222.....	21	IMT37477.....	17	IMT47006.....	35	ST935U1WB.....	38
2420106.....	36	IMT33135.....	28	IMT37478.....	19	IMT47206.....	35	ST935U1WC.....	38
2420107.....	36	IMT33136.....	28	IMT37479.....	19	IMT47208.....	29	ST943U1B *.....	40
2420108.....	36	IMT33137.....	28	IMT37480.....	17	IMT47209.....	29	ST943U1BA *.....	40
2420110.....	36	IMT33138.....	28	IMT37481.....	16	IMT47210.....	29	ST943U1W *.....	40
2420111.....	36	IMT33139.....	28	IMT37482.....	16	IMT47211.....	29	ST943U1WA *.....	40
2420112.....	36	IMT33140.....	28	IMT37483.....	16	IMT47212.....	29	ST943U3B.....	40
2420113.....	36	IMT33141.....	28	IMT37484.....	16	IMT47213.....	29	ST943U3W.....	40
2420114.....	36	IMT33142.....	28	IMT37485.....	16	IMT47214.....	29	ST945U1B *.....	40
2420115.....	36	IMT33143.....	28	IMT37486.....	15	IMT47215.....	29	ST945U1BA *.....	40
2420116.....	36	IMT33144.....	28	IMT37487.....	15	IMT47216.....	29	ST945U1W *.....	40
2420117.....	36	IMT33145.....	28	IMT37488.....	11	IMT47217.....	29	ST945U1WA *.....	40
2420118.....	36	IMT33146.....	28	IMT37489.....	11	IMT47218.....	29	ST945U3B *.....	40
2420300.....	36	IMT33147.....	28	IMT37490.....	17	IMT47219.....	29	ST945U3W.....	40
2420301.....	36	IMT33148.....	28	IMT37491.....	17	IMT47220.....	29	ST9331B.....	37
2420302.....	36	IMT33149.....	28	IMT37492.....	15	IMT47221.....	29	ST9331W.....	37
2420303.....	36	IMT33150.....	28	IMT37493.....	15	IMT47222.....	29	ST9351B.....	37
2420304.....	36	IMT33151.....	28	IMT37494.....	10	IMT47223.....	29	ST9351W.....	37
		IMT33152.....	28	IMT37495.....	20	IMT47224.....	29	ST9353B.....	37
		IMT33153.....	28	IMT37497.....	20	IMT47225.....	32	ST9353W.....	37
		IMT33154.....	28	IMT37498.....	14	IMT47226.....	32	ST9431B.....	39
		IMT33155.....	28	IMT37500.....	15	IMT47227.....	32	ST9431W.....	39
		IMT33156.....	28	IMT37501.....	15	IMT47228.....	32	ST9433B.....	39
		IMT33157.....	28	IMT37502.....	15	IMT47233.....	32	ST9433W.....	39
		IMT33158.....	28	IMT37503.....	15	IMT47234.....	29	ST9435W.....	39
		IMT33160.....	28	IMT37504.....	15	IMT47235.....	29	ST9451B *.....	39
		IMT33161.....	28	IMT37505.....	13	IMT47236.....	29	ST9451W *.....	39
		IMT34468.....	18	IMT37506.....	13	IMT47237.....	29	ST9453B *.....	39
		IMT34469.....	18	IMT37507.....	12	IMT47238.....	33	ST9453W.....	39
		IMT34471.....	18	IMT37508.....	19	IMT47239.....	33	ST9455W.....	39
		IMT34472.....	18	IMT37509.....	19	IMT47270.....	30		
		IMT34473.....	18	IMT37511.....	19	IMT47271.....	30		
		IMT37400.....	13	IMT37513.....	19	IMT47272.....	30		
		IMT37401.....	13	IMT37515.....	13	IMT47273.....	30		
		IMT37402.....	13	IMT37517.....	17	IMT47274.....	31		
		IMT37403.....	13	IMT37531.....	12	IMT47275.....	31		
		IMT37404.....	13	IMT37532.....	10	IMT47276.....	31		
		IMT37405.....	13	IMT37534.....	10	IMT47277.....	31		
		IMT37412.....	14	IMT38067.....	35	IMT47278.....	31		
		IMT37413.....	14	IMT38068.....	35	IMT47279.....	31		
		IMT37414.....	14	IMT38070.....	35	IMT47281.....	31		
		IMT37415.....	14	IMT38071.....	35	IMT80000.....	15		
		IMT37416.....	14	IMT38072.....	35	IMT80001.....	15		
		IMT37417.....	14	IMT38215.....	36	IMT80005.....	10		
		IMT37418.....	14	IMT38216.....	36	IMT80006.....	10		
		IMT37419.....	14	IMT38217.....	36	IMT80007.....	13		
		IMT37420.....	14	IMT39077.....	11	IMT80008.....	13		
		IMT37421.....	14	IMT39079.....	11	IMT80009.....	13		
		IMT37422.....	10	IMT46026.....	34	INS44000.....	41		
		IMT37423.....	10	IMT46033.....	34	INS44001.....	41		
		IMT37424.....	10	IMT46035.....	34	INS44002.....	41		
		IMT37425.....	10	IMT46036.....	34	INS44003.....	41		
		IMT37426.....	10	IMT46064.....	34	INS44004.....	41		
		IMT37427.....	10	IMT46071.....	34	INS44005.....	41		
		IMT37428.....	10	IMT46073.....	34	INS44006.....	41		
		IMT37429.....	10	IMT46074.....	34	INS44007.....	41		
		IMT37430.....	10	IMT46101.....	34	INS44008.....	41		
		IMT37431.....	10	IMT46118.....	34	INS44009.....	41		
		IMT37432.....	10	IMT46149.....	34	INS44010.....	41		
		IMT37433.....	10	IMT46156.....	34	INS44030.....	41		
		IMT37434.....	10	IMT46157.....	34	INS44031.....	41		
		IMT37435.....	10	IMT46158.....	34	INS61200.....	42		
		IMT37436.....	10	IMT46221.....	34	INS61201.....	42		
		IMT37437.....	12	IMT46222.....	34	INS61202.....	42		
		IMT37438.....	12	IMT46223.....	34	INS61203.....	42		
		IMT37439.....	12	IMT46224.....	34	INS61205.....	42		
		IMT37440.....	12	IMT46231.....	34	INS61207.....	42		
		IMT37441.....	12	IMT46232.....	34	INS61208.....	42		
		IMT37442.....	12	IMT46233.....	34	INS61209.....	42		
		IMT37443.....	12	IMT46234.....	34	INS61210.....	42		
		IMT37444.....	12	IMT46248.....	34	INS61211.....	42		
		IMT37445.....	12	IMT46286.....	34	INS61212.....	42		
		IMT37446.....	12	IMT46293.....	34	INS61213.....	42		
		IMT37447.....	19	IMT46918.....	34	INS61214.....	42		
		IMT37448.....	20	IMT46919.....	34	INS61215.....	42		
		IMT37450.....	20	IMT46921.....	34				
		IMT37453.....	20	IMT46922.....	34				
		IMT37455.....	20	IMT46923.....	34				
		IMT37457.....	14	IMT46924.....	34	shn0212021.....	19		
		IMT37458.....	10	IMT46926.....	34	ST933U1B.....	38		
		IMT37459.....	10	IMT46927.....	34	ST933U1BA.....	38		
		IMT37460.....	10	IMT46928.....	34	ST933U1BB.....	38		
		IMT37461.....	10	IMT46969.....	34	ST933U1W.....	38		
						ST933U1WA.....	38		
						ST933U1WB.....	38		



**Schneider Electric Industries SAS**

35, rue Joseph Monier  
CS 30323  
92506 Rueil Malmaison Cedex  
France

RCS Nanterre 954 503 439  
Capital social 896 313 776 €  
[www.se.com](http://www.se.com)

08-2022  
LSB02964\_DIY\_Fixings

© 2022 - Schneider Electric. All Rights Reserved.  
All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.

This document has been  
printed on recycled paper

