


# FLAT POLYMERO

672395.002.1 | Combined luminaires for escape route illumination



Ceiling and wall luminaires  
4051859431282  
D 460, H 120

Ceiling mounting, Wall (surface)  
white

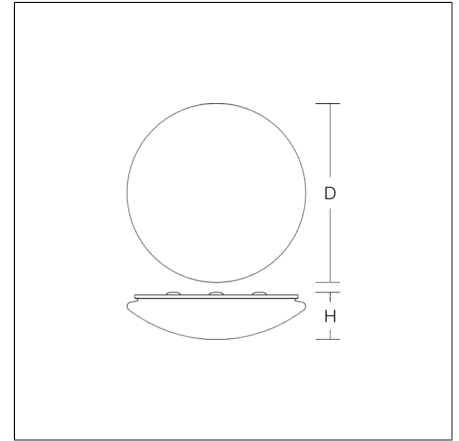


Decorative round surface-mounted luminaire. For escape route illumination. Base: metal, powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Diffuser fastening: patented push system. Suitable for Ceiling mounting, Wall (surface). Driver integrated.

## Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Diameter D	460 mm
Height H	120 mm
Weight	2.67 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux, mains operation	2000 lm
System power, mains operation	19 W
Rated luminous flux, emergency operation	510 lm
System power, emergency operation	5,7 W
System efficiency	105 lm/W
Glare evaluation UGR (4H 8H)	18,9
Beam angle	down 116° up 180°
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Not necessary
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
CIE Flux Code / CEN Flux Code	43 73 91 90 100
Type of protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	-10 °C ... + 35 °C
Conformity mark	CE, EAC

## Spareparts



08-311165.012  
Replacement diffuser