

Product Environmental Profile

EasyCan






General information

Representative product	EasyCan -BLRCS010A012B40
Description of the product	<p>EasyCan are low voltage cylindrical capacitors optimized to deliver under standard operating conditions for Networks with insignificant non linear loads.They can be used in fixed and automatic Power Factor correction systems.</p> <p>• Technical datas:</p> <ul style="list-style-type: none"> - Mean life expectancy up to 100,000 hours. - Power ratings from 1 to 30 kvar - Operating temperature up to 55 °C - Inrush current withstand up to 200 x In - Harmonic content withstand $\leq 10\%$ - Mounting Indoor, Upright - Compliant with standards IEC 60831-1 and -2.
Functional unit	To supply the rated reactive energy at rated supply voltage both in 50 & 60Hz to improve the power factor in the networks according to the IEC 60831- Part 1 &2



Constituent materials

Reference product mass	584.66 g including the product, its packaging and additional elements and accessories
-------------------------------	---

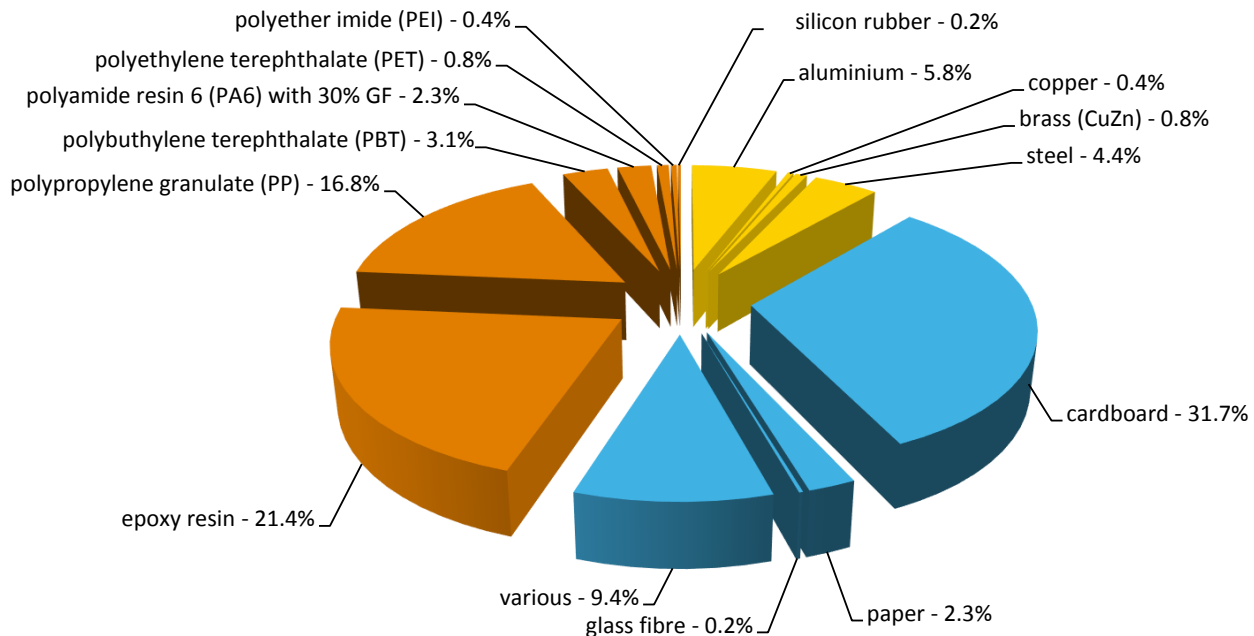

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website
<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

Additional environmental information

The EasyCan presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 193.8 g, consisting of cardboard (99%), PE film (1%) Product distribution optimised by setting up local distribution centres
Installation	EasyCan capacitor need to follow the instruction as per the installation guide available along with every product. This document can be downloaded from internet also for the customers. It is very important to keep the environmental condition and ventilation needs of this product as per what is mentioned in the instruction manual
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: 44% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Environmental impacts

Reference life time	10 years			
Product category	Passive products - continuous operation			
Installation elements	No special components needed			
Use scenario	Product dissipation is 15 W full load, loading rate is 30% and service uptime percentage is 100% The product is in active mode for ~80% in fixed compensation applications and 50% in automatic PF control applications with a power use of <0.5W/KVAr			
Geographical representativeness	Middle east asia			
Technological representativeness	EasyCan are low voltage cylindrical capacitors optimized to deliver under standard operating conditions for Networks with insignificant non linear loads.They can be used in fixed and automatic Power Factor correction systems. • Technical datas: - Mean life expectancy up to 100,000 hours. - Power ratings from 1 to 30 kvar - Operating temperature up to 55 °C - Inrush current withstand up to 200 x In - Harmonic content withstand ≤ 10% - Mounting Indoor, Upright - Compliant with standards IEC 60831-1 and -2.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: India	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		EasyCan - BLRCS010A012B40					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	7.86E-05	5.03E-05	0*	0*	2.83E-05	0*
Contribution to the soil and water acidification	kg SO ₂ eq	4.70E+00	1.07E-02	0*	0*	4.69E+00	0*
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	1.80E-01	3.06E-03	7.93E-05	5.01E-04	1.76E-01	4.60E-05
Contribution to global warming	kg CO ₂ eq	6.25E+02	4.27E+00	7.54E-02	2.63E-01	6.21E+02	1.16E-01
Contribution to ozone layer depletion	kg CFC11 eq	1.51E-04	2.92E-07	0*	0*	1.51E-04	0*
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	2.23E-01	9.99E-04	2.46E-05	6.29E-05	2.22E-01	0*

Resources use		EasyCan - BLRCS010A012B40					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.67E+00	4.95E-02	0*	0*	1.62E+00	0*
Total Primary Energy	MJ	1.08E+04	6.15E+01	0*	0*	1.07E+04	0*

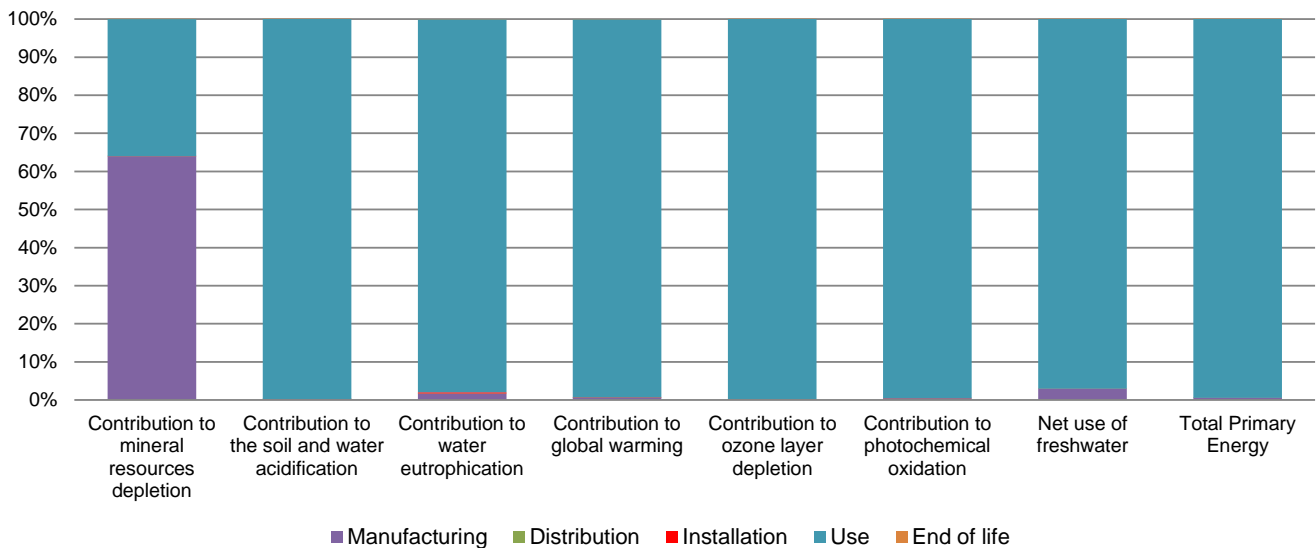

Optional indicators		EasyCan - BLRCS010A012B40					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	6.46E+03	6.43E+01	1.06E+00	0*	6.39E+03	6.81E-01
Contribution to air pollution	m ³	2.70E+04	3.46E+02	3.21E+00	0*	2.66E+04	5.31E+00
Contribution to water pollution	m ³	2.78E+04	1.64E+03	1.24E+01	1.38E+01	2.60E+04	6.11E+01

Resources use		EasyCan - BLRCS010A012B40					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.59E-01	1.59E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	9.02E+02	2.43E+00	0*	0*	9.00E+02	0*
Total use of non-renewable primary energy resources	MJ	9.87E+03	5.91E+01	1.01E+00	0*	9.81E+03	0*
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	9.02E+02	2.19E+00	0*	0*	9.00E+02	0*
Use of renewable primary energy resources used as raw material	MJ	2.36E-01	2.36E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	9.86E+03	4.73E+01	1.01E+00	0*	9.81E+03	0*
Use of non renewable primary energy resources used as raw material	MJ	1.17E+01	1.17E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*

Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	2.73E+00	2.07E+00	0*	0*	0*	6.67E-01
Non hazardous waste disposed	kg	2.32E+03	1.75E+00	0*	0*	2.32E+03	0*
Radioactive waste disposed	kg	1.89E+00	1.18E-03	0*	0*	1.89E+00	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.95E-01	2.37E-02	0*	0*	0*	1.72E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.19E-02	1.35E-03	0*	0*	0*	1.06E-02
Exported Energy	MJ	5.16E-03	0*	0*	5.16E-03	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	ENVPEP1611007_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	05/2016		
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	X	External	
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			

Schneider Electric Industries SAS
 CATHERINE COLIN
 catherine.colin@fr.schneider-electric.com

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP1611007_V1

© 2016 - Schneider Electric – All rights reserved

05/2016