


# Unity 80 Gimbal



- Compact high performance architectural adjustable downlight suitable for commercial, hospitality and retail applications
- 30° tilt angle
- Die-cast aluminium construction, powder coated and 30° cut-off angle
- Mirror finish anodized reflector
- Anti glare design to create visual comfort
- Remote driver with plug and play connection
- Dimmable and emergency options
- Powered by Tridonic

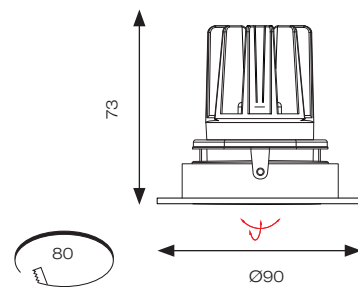

Powered by CASAMBI



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	BEAM ANGLE	CLASS	IP
230V	50/60Hz	-20°C to 25°C	L70 50,000	Ra 90	55°	2	IP20

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	SDCM	UGR	TRADE
AULED80GIM	Cool White	15W	4000K	1242lm	80lm	3	18	£59.50
AULED80GIM/WW	Warm White	15W	3000K	1080lm	72lm	5	20	£59.50

\* UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £90.00	/OCTO	OCTO Smart Control	+ £155.00
/SM3	Self-Test Emergency	+ £121.00	/DD	Digital Dimming (DD1//DD3/DD4)	+ £95.00
/DM3	DALI Emergency	+ £205.00			