



Corepro - LED HID HPL



TForce Core LED HPL 13W E27 840 FR

Philips TrueForce Core LED HPL lamps are an easy, LED solution with a short pay-back to replace High Intensity Discharge (HID) lamps. This new generation of LED Core Post-Top lamps brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while delivering instant saving for a low initial investment. Furthermore, TrueForce CorePro LED HPL lamps are designed to have the same lamp size and light distribution as their HID alternatives. And thanks to our high-power LED filament technology, you'll never know the difference. Plus, their unique IP65 design means that TrueForce Core LED HPL Post-Top lamps can be used for outdoor, as well as indoor applications.

Warnings and Safety

- Installation should always be performed by a qualified electrician or installer. Use the installation guide for instructions.

Product data

General Information		Luminous Efficacy (rated) (Nom)	
Cap-Base	E27		153 lm/W
Nominal lifetime	25,000 hour(s)	Color Consistency	<6
Switching Cycle	50,000	Color rendering index (CRI)	80
Lighting Technology	LED	LLMF At End Of Nominal Lifetime (Nom)	70 %
Flux measurement reference	Sphere	Photobiological safety according to EN 62471	RG1
Light Technical		Operating and Electrical	
Color Code	840 [CCT of 4000K]	Line Frequency	50 to 60 Hz
Beam Angle (Nom)	300 degree(s)	Input Frequency	50 to 60 Hz
Luminous Flux	2,000 lm	Power Consumption	13 W
Color Designation	Cool White (CW)	Lamp Current (Nom)	97 mA
Correlated Color Temperature (Nom)	4000 K	Starting Time (Nom)	0.5 s
		Warm-up time to 60% light	0.5 s

Corepro - LED HID HPL

Power Factor (Fraction)	0.5
Voltage (Nom)	220-240 V
Ballast Compatibility	Mains only
Inrush current at mains	5.9
Max. lamp no. on MCB B type 10A - Mains	53
Max. lamp no. on MCB B type 10A - EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 10A - EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - Mains	85
Max. lamp no. on MCB B type 16A - EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - EM ballast with Compensation Capacitor.	-

Temperature

T-Case Maximum (Nom)	38.2 °C
----------------------	---------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Shape	ED75
Net Weight (Piece)	0.130 kg

Approval and Application

Energy Efficiency Class	D
-------------------------	---

Energy Consumption kWh/1000 h	13 kWh
EPREL Registration Number	403619
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	1.6
Ambient temperature range	-30 to +45 °C


Application Conditions

can it be used in closed luminaires	Yes
-------------------------------------	-----

Product Data

Order product name	TForce Core LED HPL 13W E27 840 FR	
Full product name	TForce Core LED HPL 13W E27 840 FR	
Full product code	871869975027500	
Order code	929002349802	
Material Nr. (12NC)	929002349802	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	8718699750275	
Numerator - Packs per outer box	6	
EAN/UPC - Case	8718699750282	



Dimensional drawing



Product	D	C
TForce Core LED HPL 13W E27 840 FR	76 mm	183 mm



Corepro - LED HID HPL

Photometric data

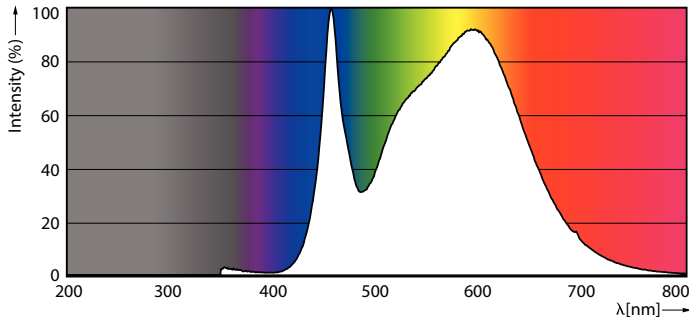


Spectral Power Distribution Colour - TForce Core LED HPL 13W E27 840 FR

Light Distribution Diagram - TForce Core LED HPL 13W E27 840 FR

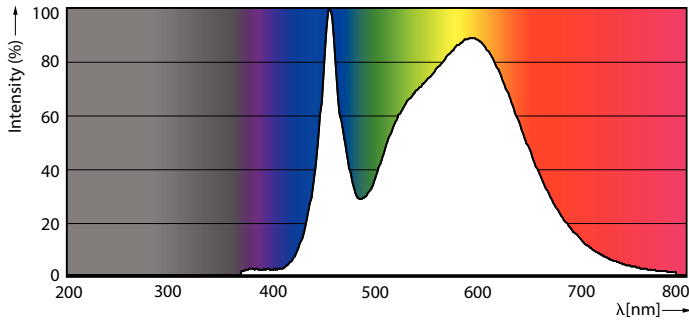

Spectral Power Distribution Colour - TForce Core LED HPL 13W E27 840 FR

Light Distribution Diagram - TForce Core LED HPL 13W E27 840 FR




© 2024 Philips Lighting B.V. All rights reserved. Page 11

General uniform lighting - TForce Core LED HPL 13W E27 840 FR

Corepro - LED HID HPL

Lifetime

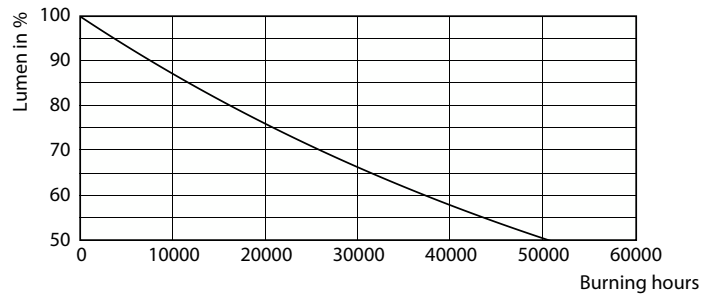

Life Expectancy Diagram

Lumen Maintenance Diagram - TForce Core LED HPL 13W E27 840 FR

