


# Vantage CCT SMD Downlight



- CCT selectable LED performance downlight suitable for commercial and education applications
- Deep cut-off angle for glare control and comfort
- One product provides 3000K,4000K and 6500K colour temperature options
- Downlight design allows installation into existing hole cut-outs from 68mm to 100mm
- Powered by Tridonic

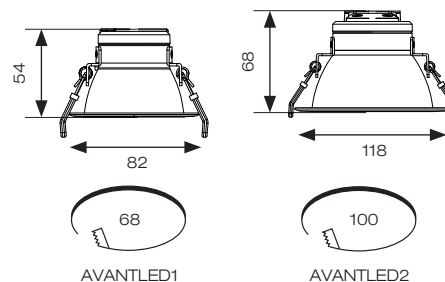

Powered by  
**CASAMBI**



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50Hz	-25°C to 40°C	L80 60,000	Ra 80	6	75°	2	IP20

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR	TRADE
AVANTLED1	CCT Selectable	8.5W	3000K/4000K/6500K	740lm (4000K)	107lm (4000K)	26	£42.40
AVANTLED2	CCT Selectable	14W	3000K/4000K/6500K	1400lm (4000K)	113lm (4000K)		£53.00

\*UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £145.00	/OCTO	OCTO Smart Control	+ £155.00
/SM3	Self-Test Emergency	+ £176.00	/DD	Digital Dimming (DD1/DD3/DD4)	+ £95.00
/DM3	DALI Emergency	+ £260.00			