


Classia
Socket outlets
Euro-American standard

RW4125 - RG4125
RW4125P - RG4125P



Use

Socket outlets for: Euro-American standard plugs.


Range

Designation	Item
Socket 2P 16A 127/250 V a.c. shielded holes	<input type="checkbox"/> RW4125
	<input type="checkbox"/> RW4125P
	<input checked="" type="checkbox"/> RG4125
	<input checked="" type="checkbox"/> RG4125P

Color code:

White colour Black colour

Overall dimensions (mm)

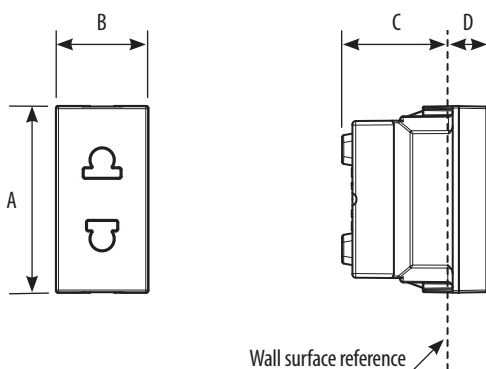

	A	B	C	D
..4125.	45.1	22.3	25.4	9.8

Connection

Terminal type: screw clamp
 Terminal capacity: 2 x 4 mm² max
 Stripping length: 11 mm
 Compatible with flexible or rigid cables

Technical characteristics

- **Protection index**
 (considering a complete installation, including cover plate)
 Penetration by solid bodies/liquid: IP20D
- **Mechanical characteristics**
 Impact test: IK 04
- **Material characteristics**
 Material:
 Case and Key cover: PC (Polycarbonate)
 Halogen free.
 UV resistant.
 Self-extinguishing:
 850° C / 30 s for insulating parts holding live parts in place
 650° C / 30 s for other parts made of insulating materials
- **Electrical characteristics**
 Voltage: 127/250 VAC
 Current: 16 A
- **Climatic characteristics**
 Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.
Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC 60884-1
 Refer to e.catalogue.