



CorePro LED PLC 4P

CorePro LED PLC 6.5W 830 4P G24q-2

The CorePro LED PLC 4P integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamping in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environmentally friendly.

Product data


General Information		Warm Up Time to 60% Light (Nom)	
Cap-Base	G24Q-2 [G24q-2]		0.5 s
EU RoHS compliant	Yes	Power Factor (Nom)	0.9
Nominal Lifetime (Nom)	30000 h	Voltage (Nom)	20-50 V
Switching Cycle	50000X		
Light Technical		Temperature	
Color Code	830 [CCT of 3000K]	T-Ambient (Max)	35 °C
Beam Angle (Nom)	120 °	T-Ambient (Min)	-20 °C
Luminous Flux (Nom)	650 lm	T-Storage (Max)	65 °C
Color Designation	White (WH)	T-Storage (Min)	-40 °C
Correlated Color Temperature (Nom)	3000 K	T-Case Maximum (Nom)	66 °C
Luminous Efficacy (rated) (Nom)	92.31 lm/W		
Color Consistency	<6	Controls and Dimming	
Color Rendering Index (Nom)	83	Dimmable	No
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Operating and Electrical		Mechanical and Housing	
Input Frequency	30000-80000 Hz	Product Length	100 mm
Power (Nom)	6.5 W		
Lamp Current (Max)	300 mA	Approval and Application	
Lamp Current (Min)	150 mA	Energy Efficiency Label (EEL)	A+
Starting Time (Nom)	0.5 s	Energy Saving Product	Yes
		Approval Marks	TUV CE marking RoHS compliance KEMA Keur certificate

CorePro LED PLC 4P

Energy Consumption kWh/1000 h	9 kWh
Product Data	
Full product code	871869654119700
Order product name	CorePro LED PLC 6.5W 830 4P G24q-2
EAN/UPC - Product	8718696541197
Order code	929001201002

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001201002
Net Weight (Piece)	0.078 kg


Dimensional drawing

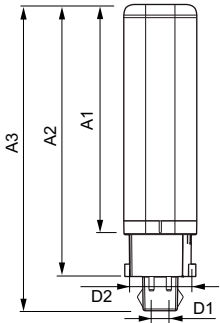


LEDtube PLC 6.5W G24q-2/830 4P

Product	D1	D2	A1	A2	A3
CorePro LED PLC 6.5W 830 4P G24q-2	24.3 mm	28.4 mm	105.8 mm	125 mm	140.6 mm

Photometric data


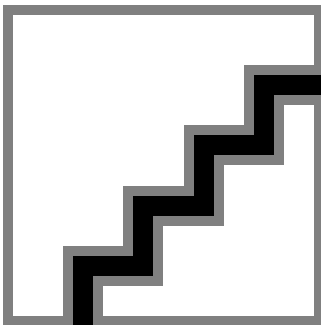


LEDtube PLC 100mm 7W G24Q-2 830 650lm

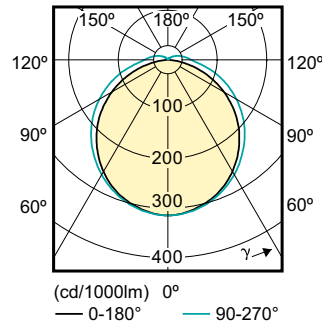



CorePro LED PLC 4P

Lifetime

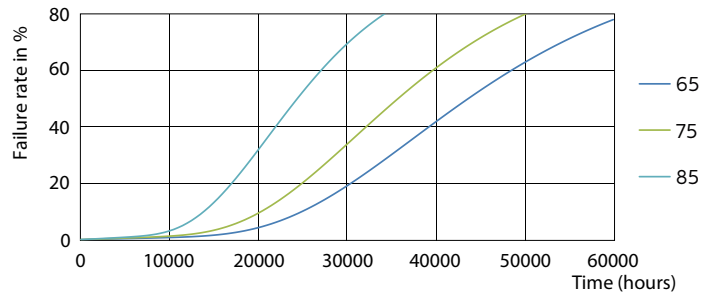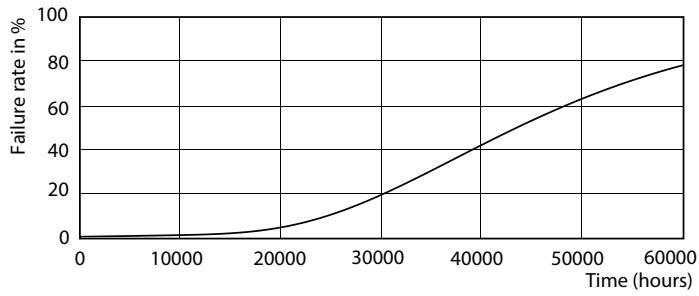

LEDtube PLC 100mm 7W G24Q-2 830 650lm

LEDtube PLC 100mm 7W G24Q-2 830 650lm

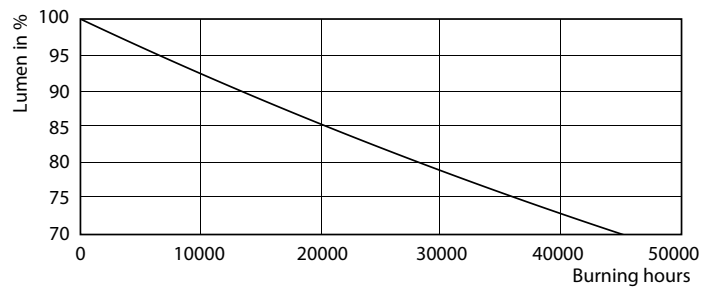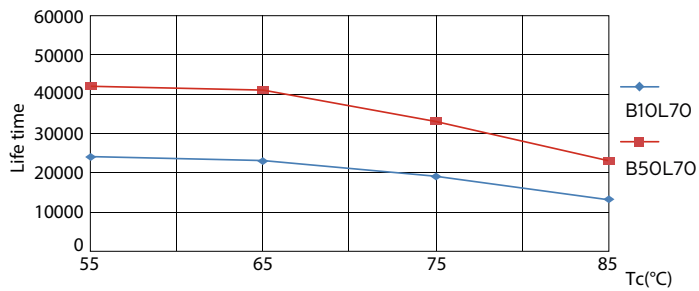

LEDtube PLC 100mm 7W G24Q-2 830 650lm

LEDtube PLC 100mm 7W G24Q-2 830 650lm

LEDtube PLC 100mm 7W G24Q-2 830 650lm

