



MASTER PL-C 2 Pin

MASTER PL-C 10W/830/2P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


| General Information | | Color rendering index (CRI) | |
|------------------------------------|--------------------|-----------------------------|---------|
| Cap-Base | G24D-1 [G24d-1] | | 82 |
| Flux measurement reference | Sphere | Operating and Electrical | |
| Light Technical | | Power Consumption | 10.4 W |
| Color Code | 830 [CCT of 3000K] | Lamp Current (Nom) | 0.190 A |
| Luminous Flux | 600 lumen | Controls and Dimming | |
| Color Designation | Warm White (WW) | Dimmable | No |
| Chromaticity Coordinate X (Nom) | 0.44 | Approval and Application | |
| Chromaticity Coordinate Y (Nom) | 0.403 | Mercury (Hg) Content (Max) | 1.4 mg |
| Correlated Color Temperature (Nom) | 3000 K | Mercury (Hg) Content (Nom) | 1.4 mg |
| Luminous Efficacy (rated) (Nom) | 60 lm/W | | |

MASTER PL-C 2 Pin

| | |
|-------------------------------|------------------------------------|
| Energy Consumption kWh/1000 h | 11 kWh |
| EPREL Registration Number | 423,274 |
| Product Data | |
| Full product code | 871150070724670 |
| Order product name | MASTER PL-C 10W/830/2P 1CT/5X10BOX |
| Order code | 927903883040 |


| | |
|---------------------------------|------------------------------------|
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 50 |
| Material number (12NC) | 927903883040 |
| Full product name | MASTER PL-C 10W/830/2P 1CT/5X10BOX |
| EAN/UPC - Case | 8711500710987 |

Dimensional drawing




| Product | D (max) | D1 (max) | A (max) | B (max) | C (max) |
|--|---------|----------|---------|---------|----------|
| MASTER PL-C 10W/830/2P 1CT/ 5X10BOX | 27.1 mm | 27.1 mm | 75.5 mm | 95.0 mm | 117.4 mm |

Photometric data



Spectral Power Distribution Colour - MASTER PL-C 10W/830/2P 1CT/5X10BOX

Lifetime

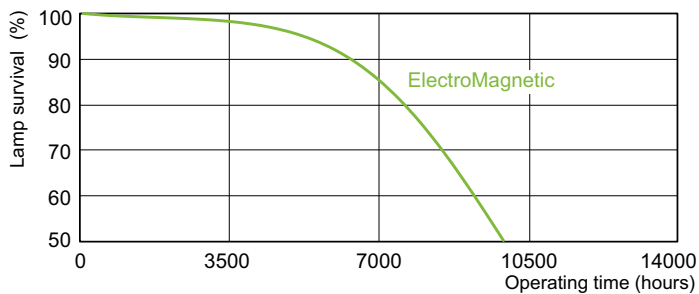

Life Expectancy Diagram - MASTER PL-C 10W/830/2P 1CT/5X10BOX

Life Expectancy Diagram - MASTER PL-C 10W/830/2P 1CT/5X10BOX

MASTER PL-C 2 Pin

Lifetime



Lumen Maintenance Diagram - MASTER PL-C 10W/830/2P 1CT/5X10BOX

